



Image not found or type unknown

Ref. No.:

837-0915800

Overview and Technical Data:

NAGEL - 2VS10-60 SV-NC vertical dual Honing Machine

[NAGEL](#)

The image features a large, stylized logo consisting of the letters 'N' and 'A' in white. The 'N' is formed by two thick, white, slanted strokes. The 'A' is also formed by thick, white, slanted strokes, with a small blue triangle at its top right. The logo is set against a solid blue rectangular background. This blue area is enclosed within a white border, which is further framed by a thick grey border. The grey border has rounded corners at the top left and bottom right.

NA

Year of Build:

Jan 2005

Description:

Used NADEL 2 VS 10 - 60 SV - NC vertical honing machine

Machine with two Honspindeln for machining 6-Zylinderblocks

CNC control: Siemens SPS S7 + NAGEL spindle control unit MS U3

Technical specifications:

- Spindle RPM 40 - 300
- Max Hydraulic Stroke length: 20 - 600 mm
- Lift speed: up to 25 m / min stepless
- Tool connection cylindrical
- Spindle speed 80 - 400 rpm infinitely variable
- Hydraulic tank capacity 800l
- Rotary drive 2x 5.5 kW = 11 KW
- Air metering device
- Total connection 48kW
- Machine height 4700 mm

Machine output: 8 workpieces / h at 100% utilization

Rareness 0.008 mm

Bore tolerance 105,000 - 105 025 mm

Surface Rz 5 µm

Honing time 400 sec

Off time 50 sec.

Cycle time 450 sec.

Nagel builds both conventional stroke honing machines as well as single pass “precidor” honing systems. Proper honing technology is selected based on the part. Every machine is custom designed specifically for the application by utilizing proven subsystems.

High Volume Production Honing Systems are fully automated and require very little operator intervention. Some of the features of the equipment include:

- Post process gauging after every honing station, integrated to tool wear compensation system
- Servo controlled mechanical tool expansion and wear compensation system for high stock removal and bore accuracy
- Hydraulic tool expansion and wear compensation system for fine surface finishes
- Hydraulic / Servo controlled oscillation system
- Servo driven precision spindle
- Automatic tool changer (optional)
- Centralized lubrication system with reservoir level and dirty filter monitoring
- Hydraulics system with flow and dirty filter monitoring
- Pneumatic line pressure monitoring, system shuts system off if the pressure drops below the limit
- Centralized coolant system with coolant flow, level and dirty filter monitoring and optional coolant level compensation system
- Automatic part transfer from station to station and complete integration into customer automation
- SPC capabilities
- PLC control with Windows based HMI
- Incorporation of other secondary operations such as part marking and final gauging

Technical Data:

Technical Data:

Control:

[SIMATIC S7](#)

Buyer Information:

Condition:

[Very good condition](#)

Available:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[16 %](#)

Location:

Germany

Images:

















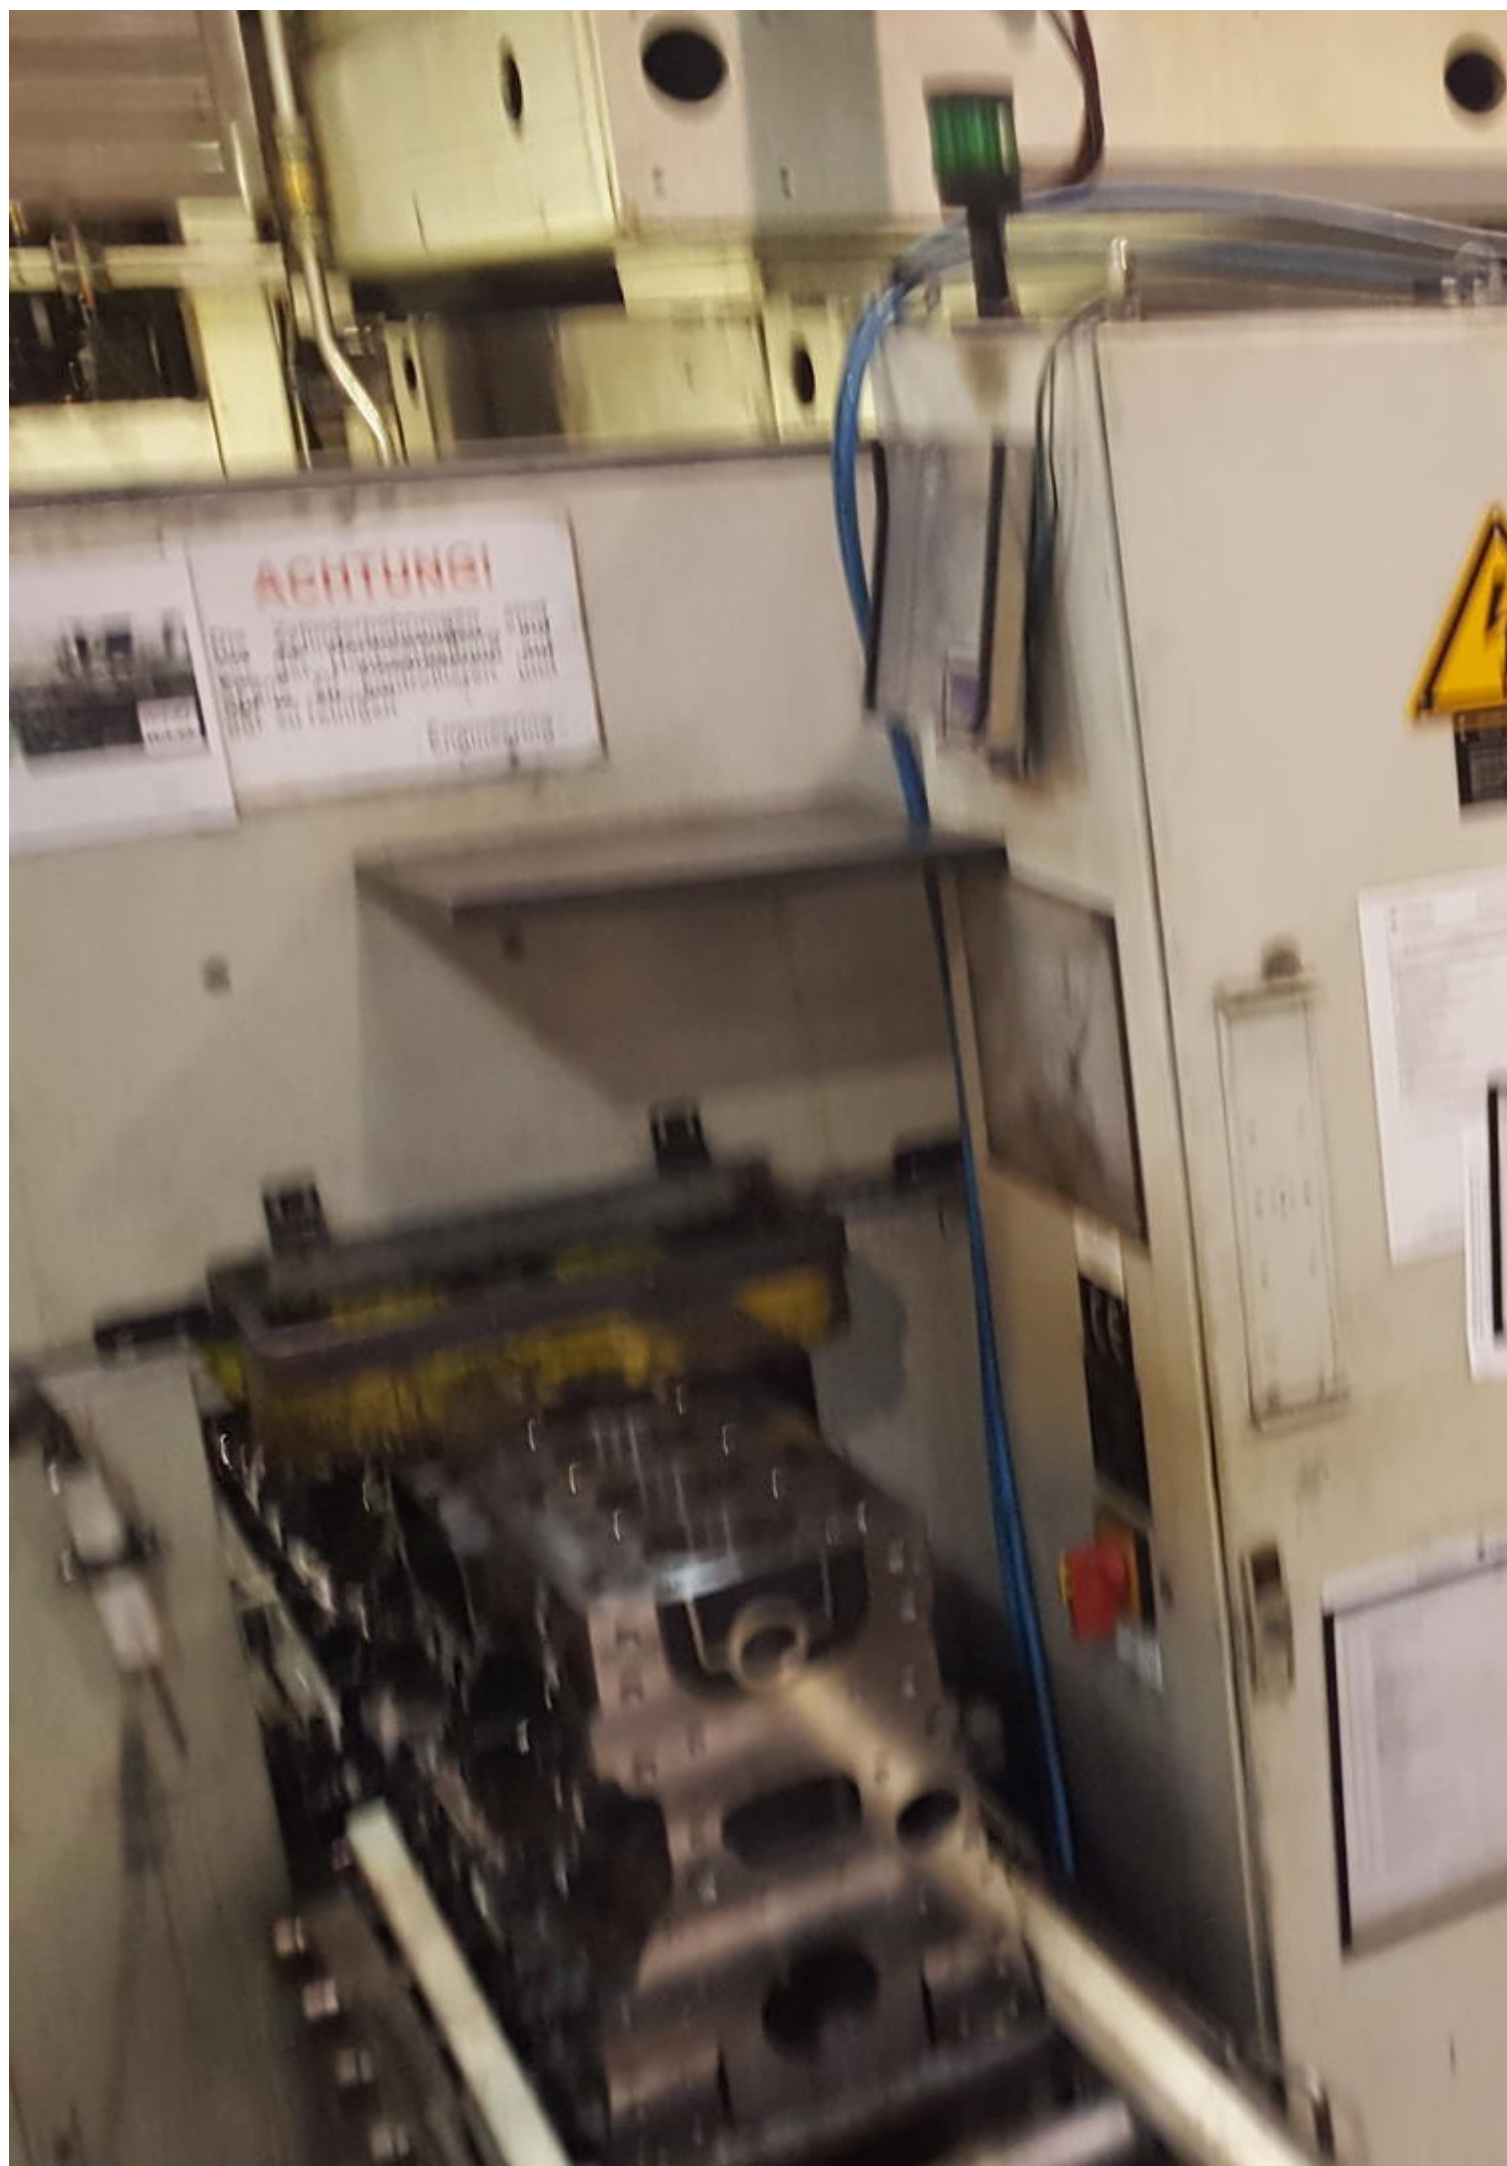







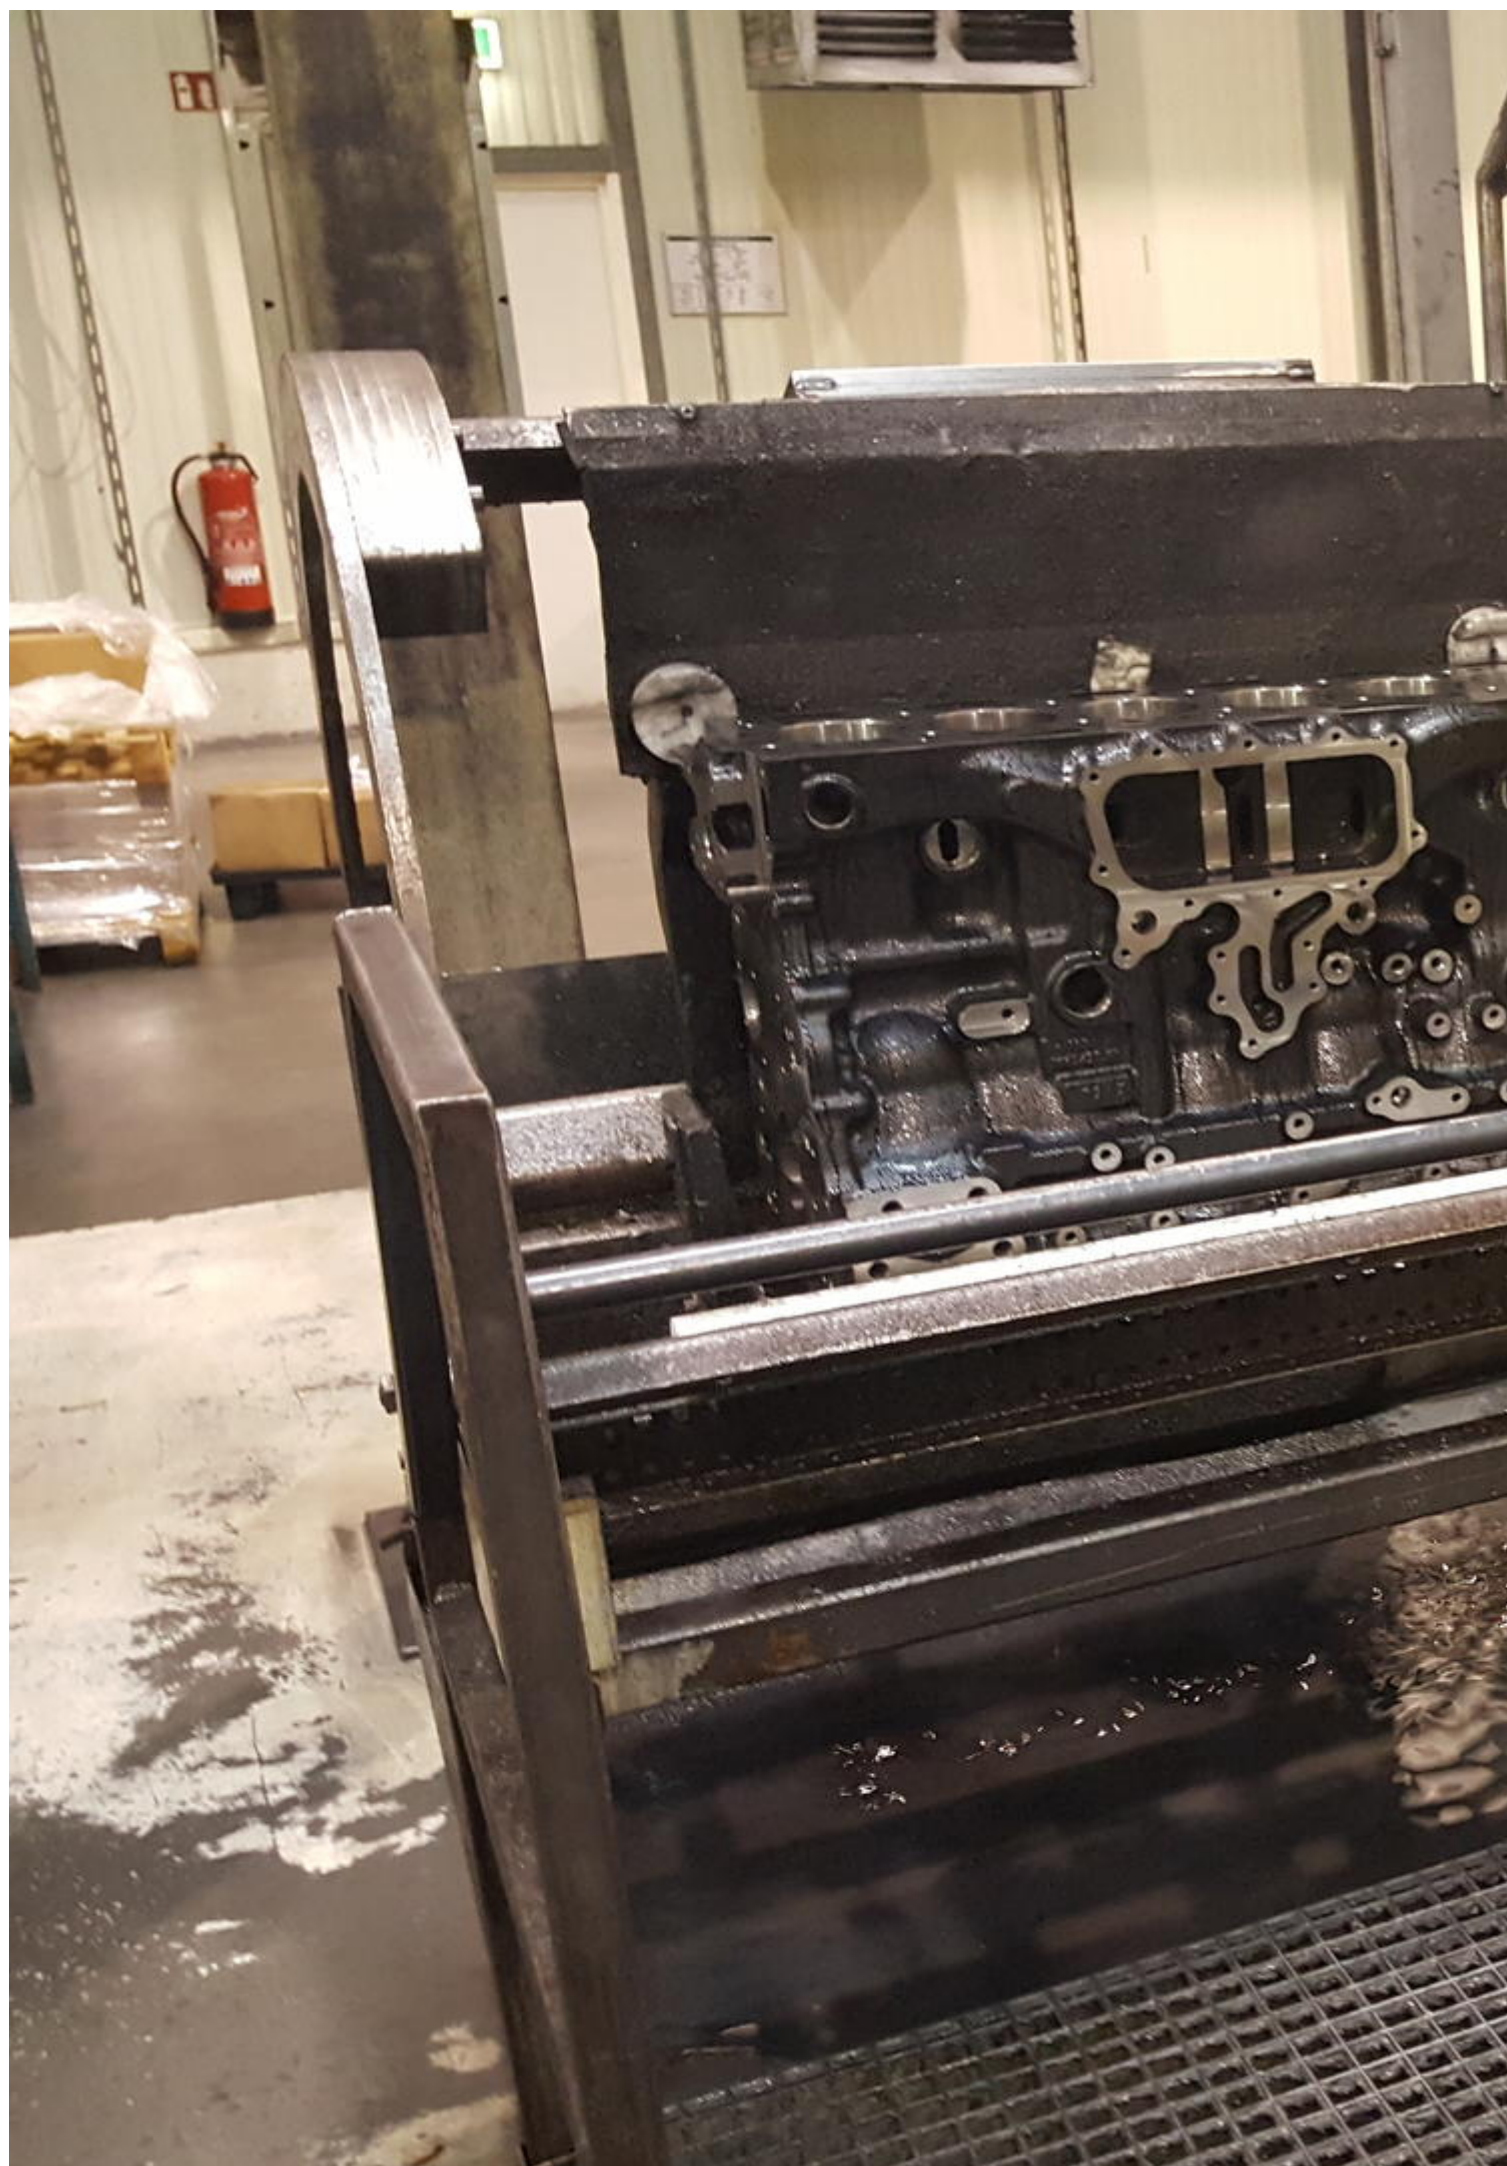









Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:
837-0915800

Overview and Technical Data:

NAGEL - 2VS10-60 SV-NC vertical dual Honing Machine

[NAGEL](#)



NA

Year of Build:

Jan 2005

Description:

Used NADEL 2 VS 10 - 60 SV - NC vertical honing machine

Machine with two Honspindeln for machining 6-Zylinderblocks

CNC control: Siemens SPS S7 + NAGEL spindle control unit MS U3

Technical specifications:

- Spindle RPM 40 - 300
- Max Hydraulic Stroke length: 20 - 600 mm
- Lift speed: up to 25 m / min stepless
- Tool connection cylindrical
- Spindle speed 80 - 400 rpm infinitely variable
- Hydraulic tank capacity 800l
- Rotary drive 2x 5.5 kW = 11 KW
- Air metering device
- Total connection 48kW
- Machine height 4700 mm

Machine output: 8 workpieces / h at 100% utilization

Rareness 0.008 mm

Bore tolerance 105,000 - 105 025 mm

Surface Rz 5 µm

Honing time 400 sec

Off time 50 sec.

Cycle time 450 sec.

Nagel builds both conventional stroke honing machines as well as single pass “precidor” honing systems. Proper honing technology is selected based on the part. Every machine is custom designed specifically for the application by utilizing proven subsystems.

High Volume Production Honing Systems are fully automated and require very little operator intervention. Some of the features of the equipment include:

- Post process gauging after every honing station, integrated to tool wear compensation system
- Servo controlled mechanical tool expansion and wear compensation system for high stock removal and bore accuracy
- Hydraulic tool expansion and wear compensation system for fine surface finishes
- Hydraulic / Servo controlled oscillation system
- Servo driven precision spindle
- Automatic tool changer (optional)
- Centralized lubrication system with reservoir level and dirty filter monitoring
- Hydraulics system with flow and dirty filter monitoring
- Pneumatic line pressure monitoring, system shuts system off if the pressure drops below the limit
- Centralized coolant system with coolant flow, level and dirty filter monitoring and optional coolant level compensation system
- Automatic part transfer from station to station and complete integration into customer automation
- SPC capabilities
- PLC control with Windows based HMI
- Incorporation of other secondary operations such as part marking and final gauging

Technical Data:

Technical Data:

Control:

[SIMATIC S7](#)

Buyer Information:

Condition:

[Very good condition](#)

Available:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[16 %](#)

Location:

Germany

Images:
















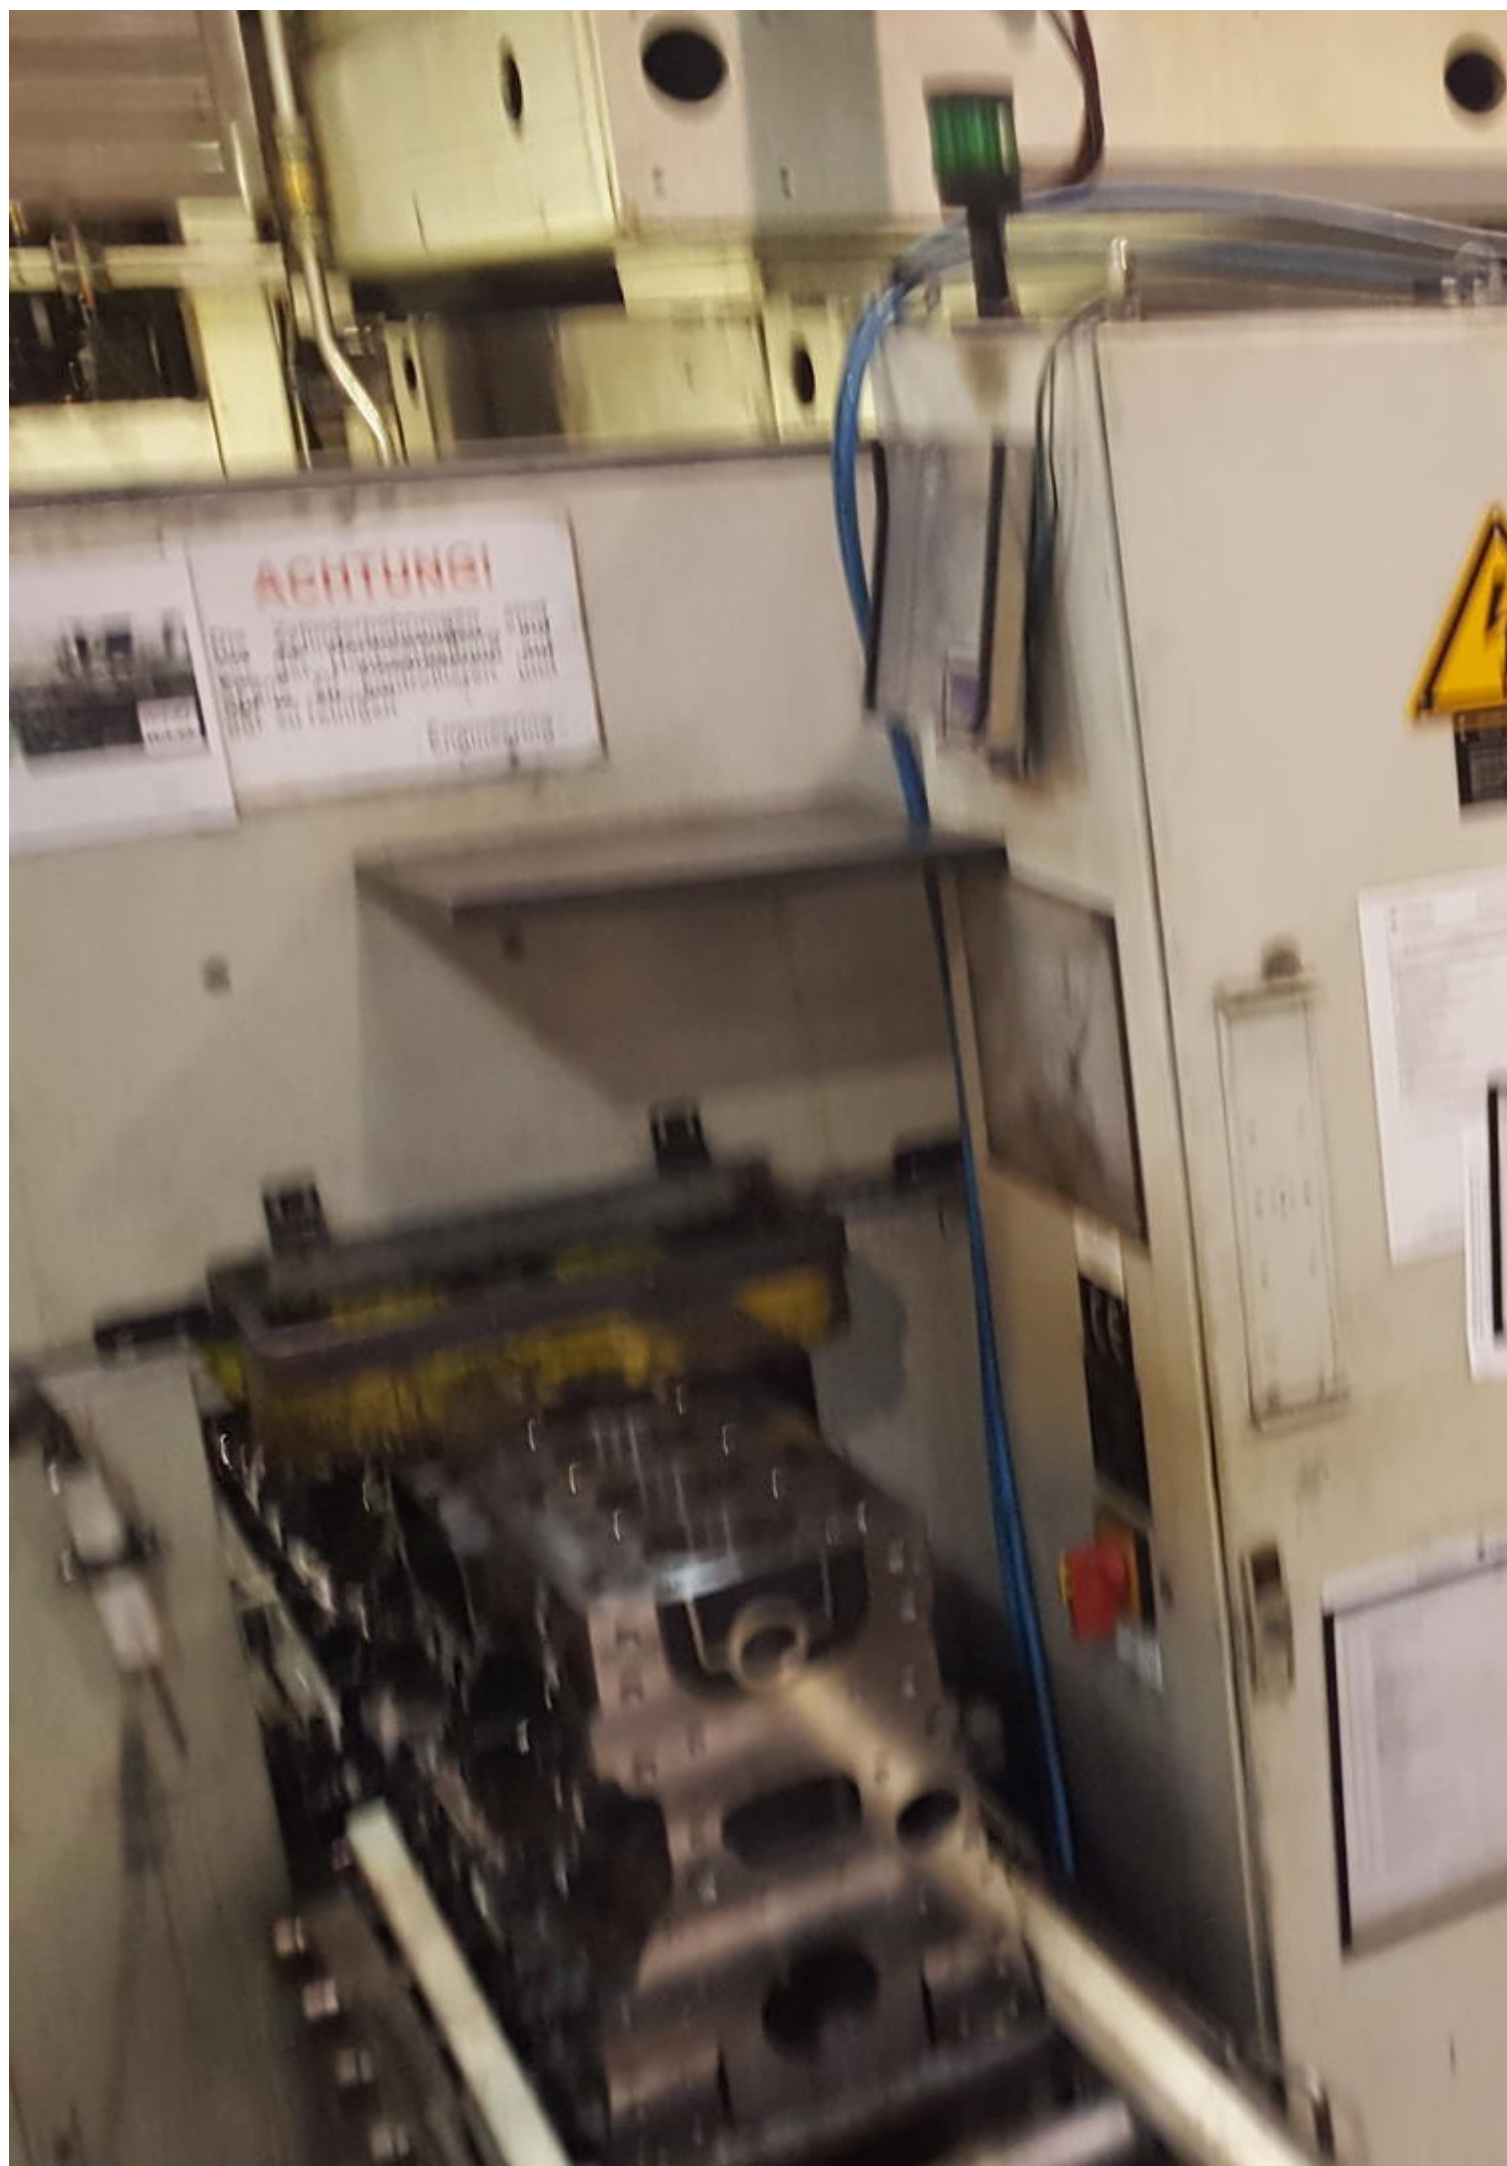

AGHTUNG!


Die Schweißarbeiten sind
nur von qualifiziertem Personal
auszuführen. Die Sicherheit
des Anwenders ist zu gewährleisten.
Die Sicherheit des Anwenders ist zu gewährleisten.
Die Sicherheit des Anwenders ist zu gewährleisten.

Engineering







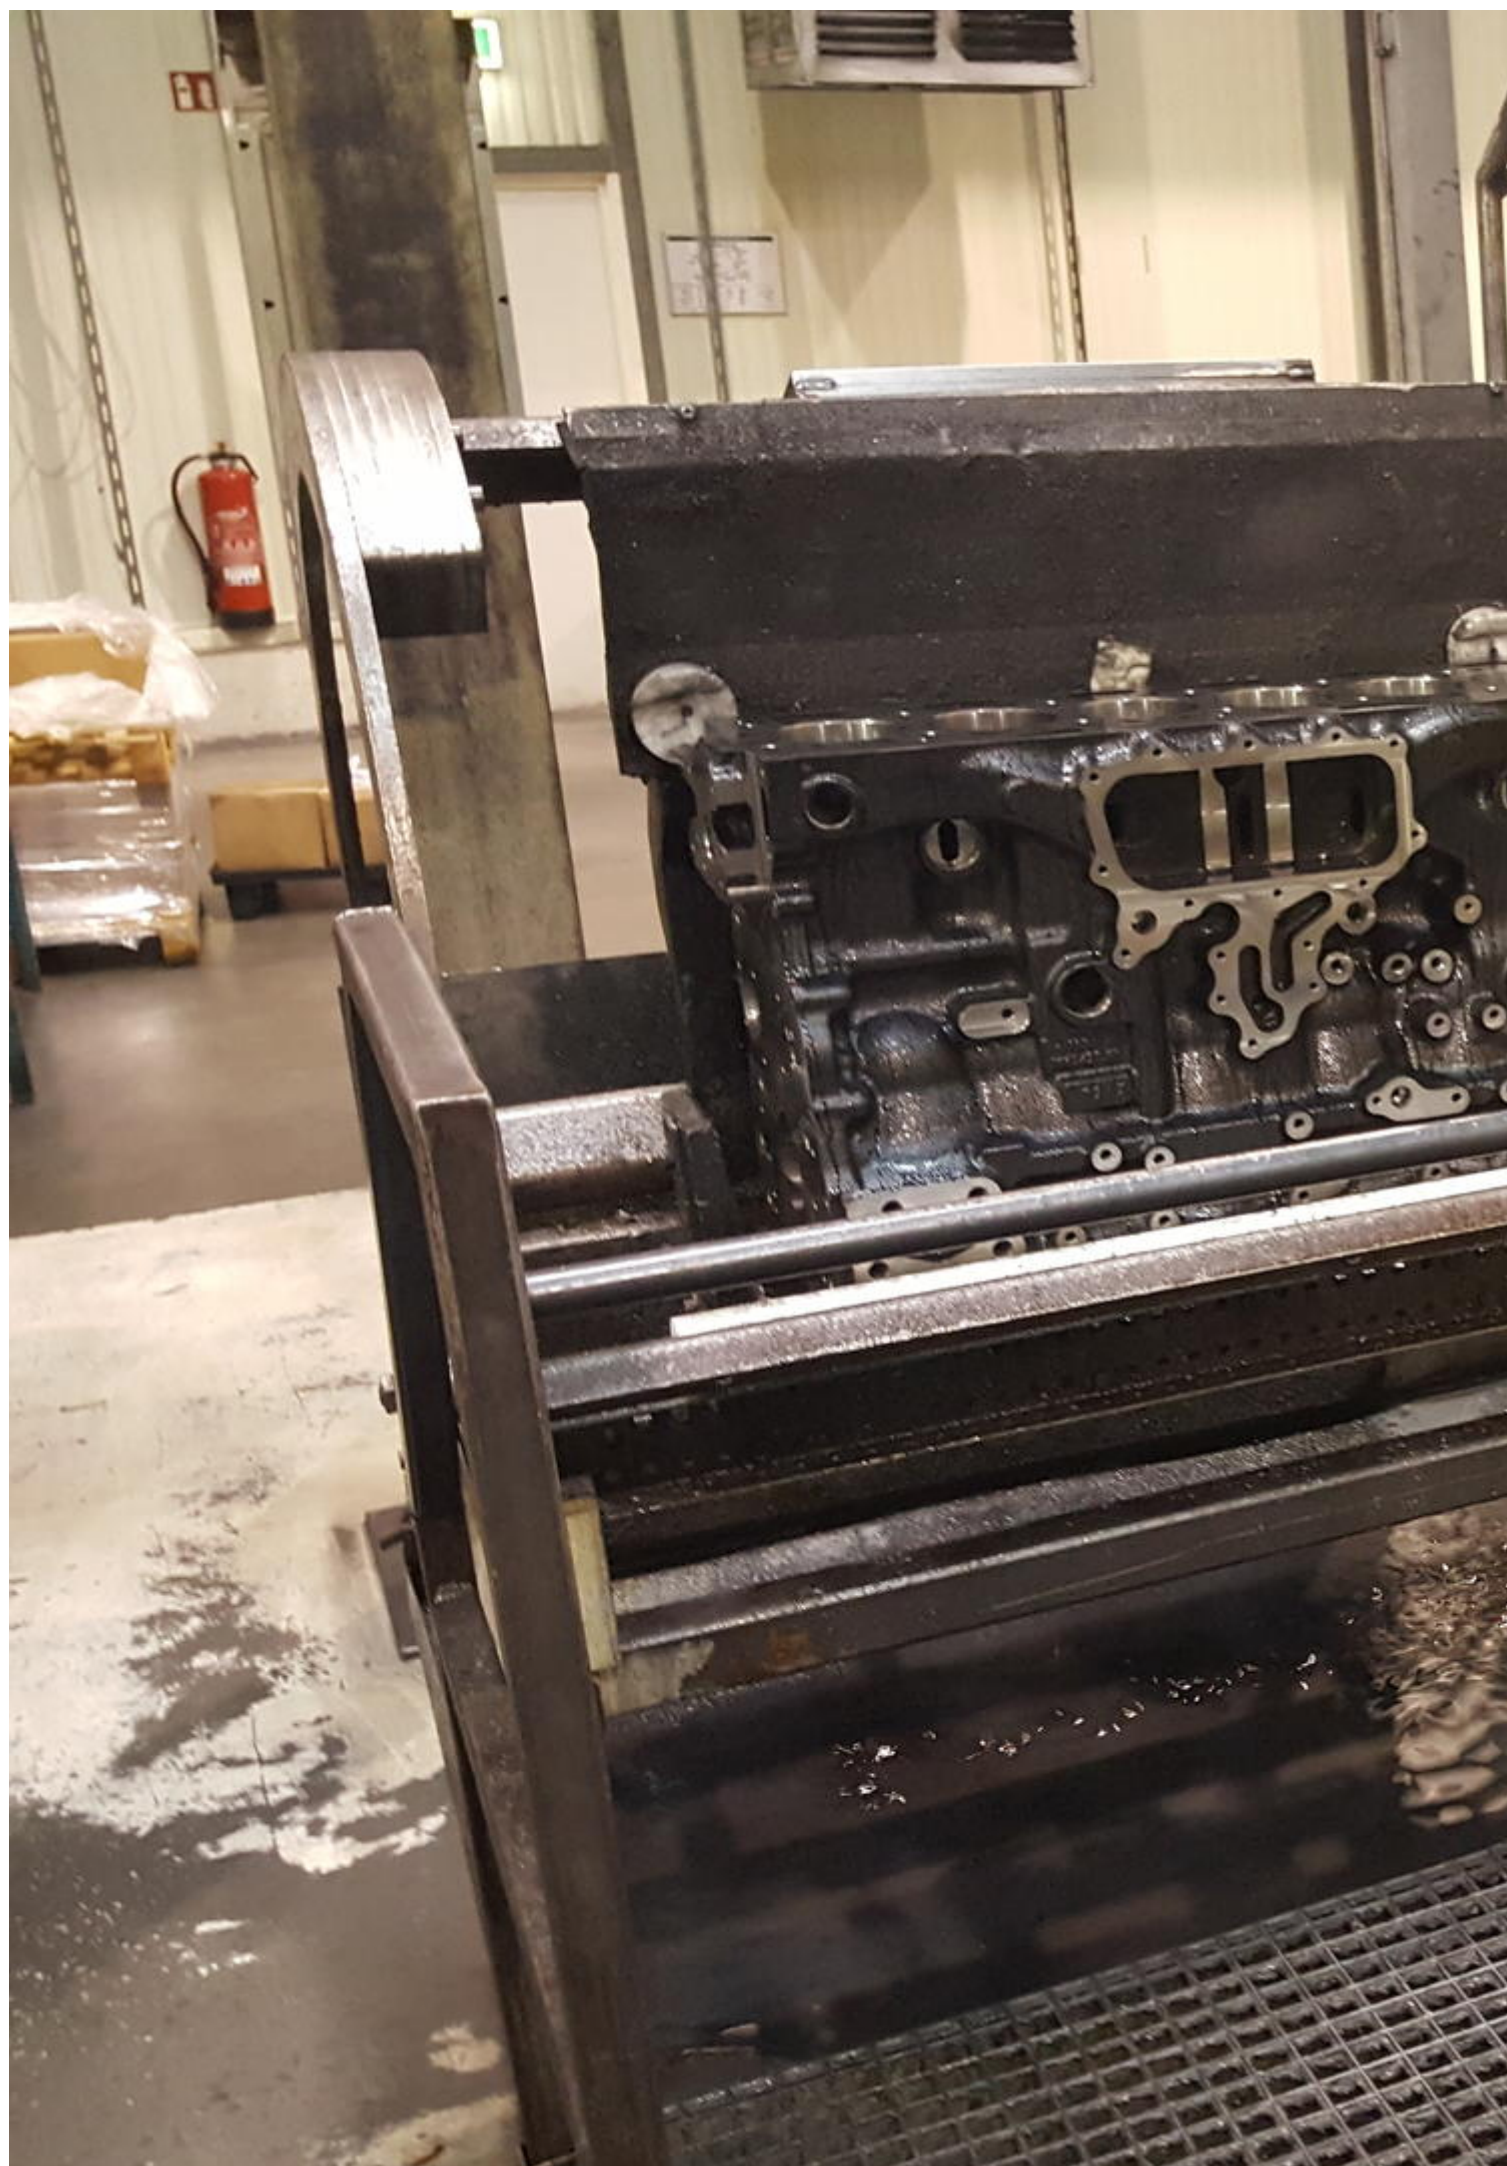









Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 05.01.2026

© Copyright 2026 - [Asset-Trade](#)

Page