

Image not found or type unknown



Ref. No.:

1112-09041003

Overview and Technical Data:

MIKRON - MSM400U LP 5 Axis

MIKRON



Year of Build:

Jan 2014

Description:

Used GF MIKRON HSM 400 U LP -5 axis high speed machining center

Operating hours machine 15.914 / spindle 6.370 std.

CNC control Heidenhain iTNC 530

Technical data:

- Tool spindle Cool-Core 42.000 1/min - 13.5kW
- Tool magazine 68x Positions HSK E-40
- 5 axes with linear motors
- IKZ 70 bar
- Pallet magazine: 18x Positions
- Round tilting table with chuck
- Pallet Type: 3R-Macro Ø156
- Number of Axes: 5
- An infrared probe from M&H (Hexagon) is installed
- The machine has a camera system installed for tool measurement (ITM)

Travels:

- Max Feed Rapid Rate 40m/min
- X1 Std. 15.748 in. 2,358 ipm
- Y1 Std. 9.440 in. 2,358 ipm
- Z1 Std. 13.779 in. 2,358 ipm
- B1 Std. 220.000 deg25 rpm 25 rpm
- C1 Direct Drive Std. 360.000 deg25 rpm 25 rpm

- Machine Dimensions (l x w x h)(in.)153 x 124 x 103

The HSM400U LP uses a gantry-style or fixed portal design. The moving parts are mounted on highly stiff, frictionless linear-roller-guide ways. This provides a highly durable and stick-slip-free motion for all running conditions. The machine tables are made of a well ribbed cast iron construction in which all transmission elements like supporting surfaces for guide carriage and the linear drive are integrated.

For the MIKRON HSM 400U LP there is a choice between different pallet-chuck systems. Those chucks are integrated in the table construction.

A weight optimized cast slide has been developed for the z-axis in order to enable a high cutting capacity when machining. Due to the box-form and good ribbing the spindle slide grants highest machine accuracy. The rotary tilt table has been developed by Mikron using optimized direct drive motors for the B and C axes. As a result true 5-axis simultaneous high-speed machining is granted.

This design minimizes the total floor space required by the machine and is particularly suited for production of high value components such as molds, electrodes and production parts, in particular, 3-D complex parts.

The portal and the base of the machine are made of polymer concrete. This composite offers excellent vibration damping characteristics - approximately 10 times greater than cast iron and significantly better than a welded construction, and is significantly more thermally stable than cast iron.. A high degree of damping is essential when working with high feed rates, high acceleration, and requirements for superior surface finishes.

Technical Data:

Technical Data:

Control:

[TNC 530](#)

Machine Hours:

15.914 hrs.

Spindle Hours:

6.370 hrs.

Spindle Speed:

42.000 rpm

Tool Holder:

[HSK E-40](#)

Tool Capacity:

68 x

Travels:

X-Axis:

500 mm

Y-Axis:

450mm

Z-Axis:

360 mm

Dimensions and Weight:

Height:

2.616 mm

Width:

3.150 mm

Length:

3.886 mm

Weight:

7.000 kg

Buyer Information:

Condition:

[Like New](#)

Availability:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[16 %](#)

Location:


Germany



1




2

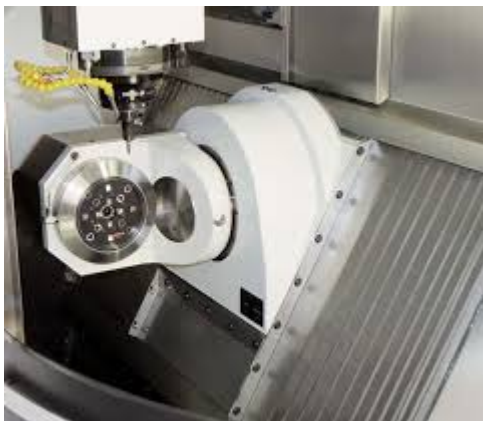

3



4

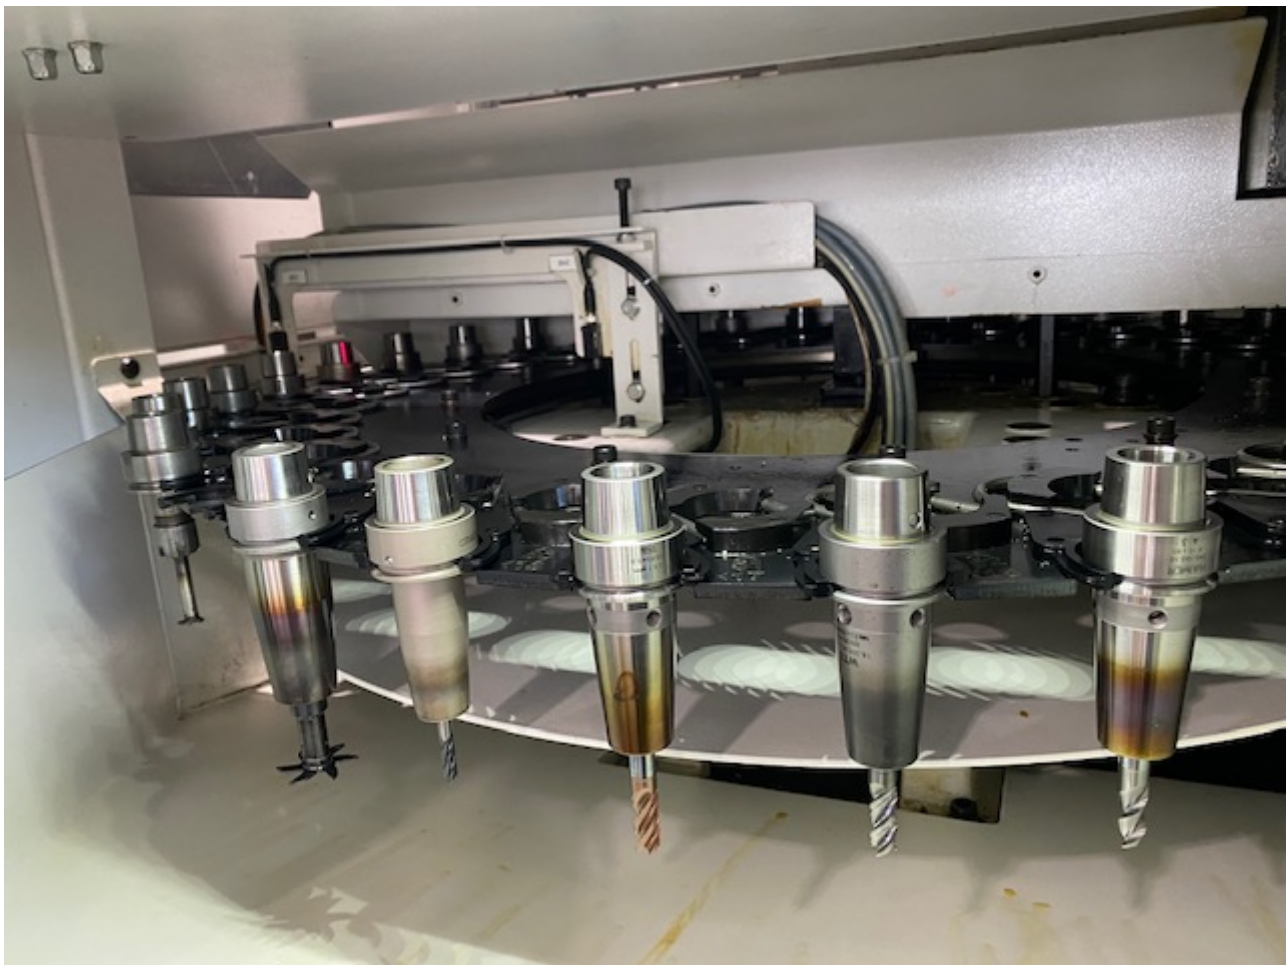

5



6




7



8



9

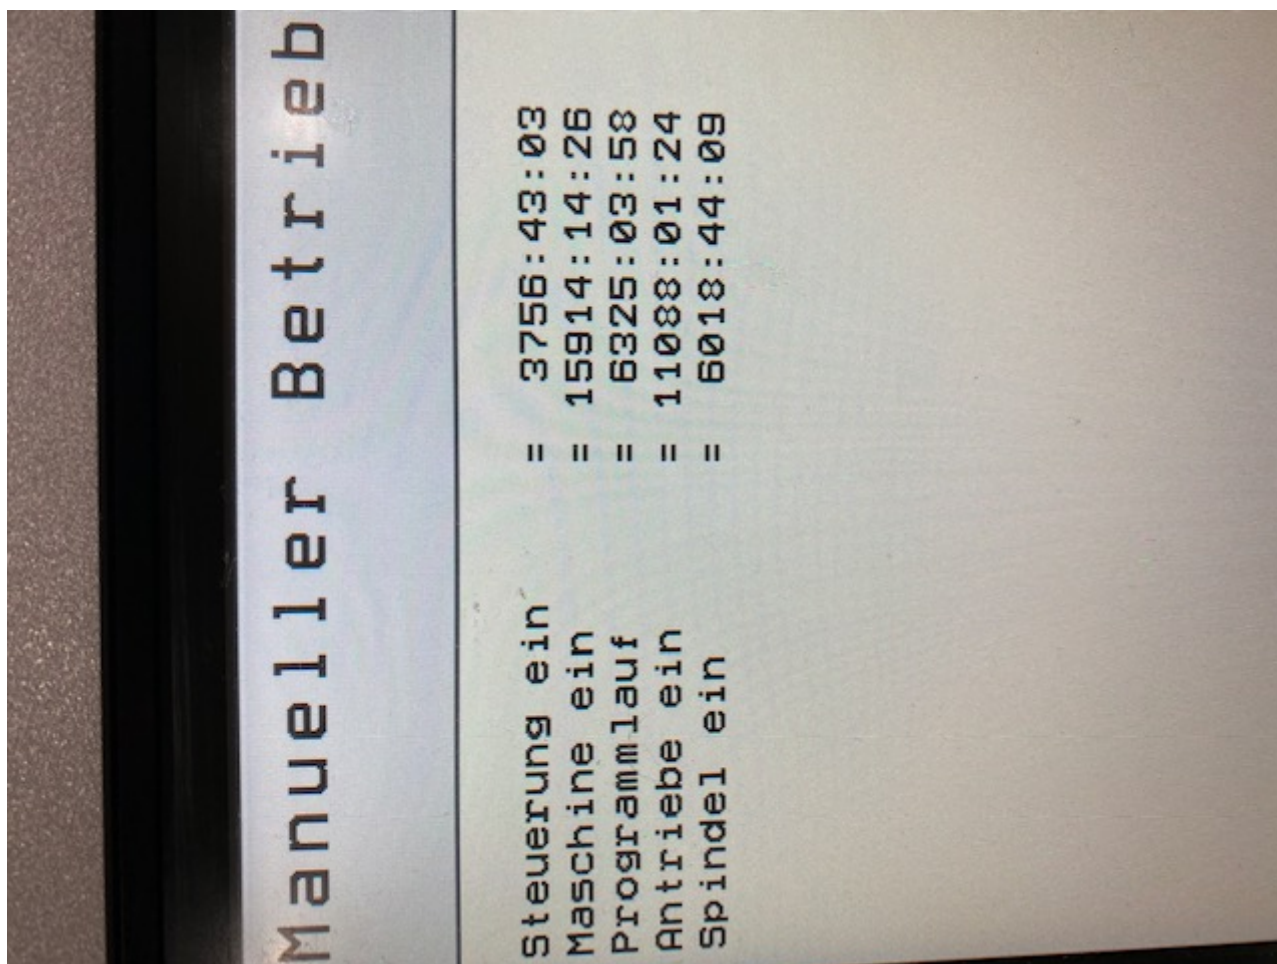

10



Step-Tec HVC140 Spindel

42 000 min⁻¹

**Hohe Geschwindigkeit,
herausragende
Präzision**

| | |
|----------------------------|---------------------------------|
| Abmessungen | Ø 140 mm x 492 mm |
| Werkzeug- schnittstelle | HSK-E40 DIN69063-1 |
| Leistung (S6) | 13.5 kW |
| Drehmoment (S6) | 8.8 Nm |
| Max. Drehzahl | 42,000 min ⁻¹ |
| Beschleunigung | 2.5 s |
| Encoder | 1 Vpp Incr. 128 |
| Schmierung | Öl-Luft |
| Abdichtung | Twin-Air-Dichtsystem |
| CoolCore | optional |
| Gewicht | 35 kg |
| Antriebsmodul | Siemens, Heidenhain, Fanuc, etc |

Optional CoolCore Variante
AMS-Messfühler für Wärmeausdehnungs-
kompensation in z-Richtung

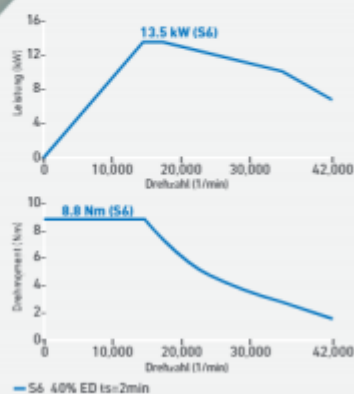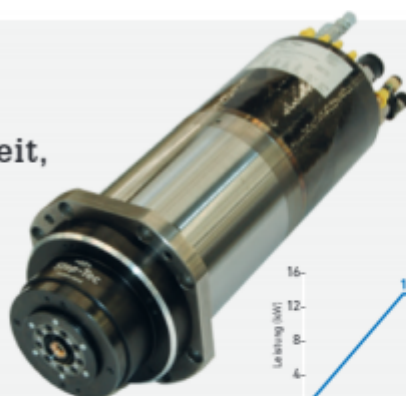

11



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:
1112-09041003

Overview and Technical Data:

MIKRON - MSM400U LP 5 Axis

MIKRON



Year of Build:
Jan 2014

Description:

Used GF MIKRON HSM 400 U LP -5 axis high speed machining center

Operating hours machine 15.914 / spindle 6.370 std.

CNC control Heidenhain iTNC 530

Technical data:

- Tool spindle Cool-Core 42.000 1/min - 13.5kW
- Tool magazine 68x Positions HSK E-40
- 5 axes with linear motors
- IKZ 70 bar
- Pallet magazine: 18x Positions
- Round tilting table with chuck
- Pallet Type: 3R-Macro Ø156
- Number of Axes: 5

- An infrared probe from M&H (Hexagon) is installed
- The machine has a camera system installed for tool measurement (ITM)

Travels:

- Max Feed Rapid Rate 40m/min
- X1 Std. 15.748 in. 2,358 ipm
- Y1 Std. 9.440 in. 2,358 ipm
- Z1 Std. 13.779 in. 2,358 ipm
- B1 Std. 220.000 deg25 rpm 25 rpm
- C1 Direct Drive Std. 360.000 deg25 rpm 25 rpm
- Machine Dimensions (l x w x h)(in.)153 x 124 x 103

The HSM400U LP uses a gantry-style or fixed portal design. The moving parts are mounted on highly stiff, frictionless linear-roller-guide ways. This provides a highly durable and stick-slip-free motion for all running conditions. The machine tables are made of a well ribbed cast iron construction in which all transmission elements like supporting surfaces for guide carriage and the linear drive are integrated.

For the MIKRON HSM 400U LP there is a choice between different pallet-chuck systems. Those chucks are integrated in the table construction.

A weight optimized cast slide has been developed for the z-axis in order to enable a high cutting capacity when machining. Due to the box-form and good ribbing the spindle slide grants highest machine accuracy. The rotary tilt table has been developed by Mikron using optimized direct drive motors for the B and C axes. As a result true 5-axis simultaneous high-speed machining is granted.

This design minimizes the total floor space required by the machine and is particularly suited for production of high value components such as molds, electrodes and production parts, in particular, 3-D complex parts.

The portal and the base of the machine are made of polymer concrete. This composite offers excellent vibration damping characteristics - approximately 10 times greater than cast iron and significantly better than a welded construction, and is significantly more thermally stable than cast iron.. A high degree of damping is essential when working with high feed rates, high acceleration, and requirements for superior surface finishes.

Technical Data:

Technical Data:

Control:

[TNC 530](#)

Machine Hours:

15.914 hrs.

Spindle Hours:

6.370 hrs.

Spindle Speed:

42.000 rpm

Tool Holder:

[HSK E-40](#)

Tool Capacity:

68 x

Travels:

X-Axis:

500 mm

Y-Axis:

450mm

Z-Axis:

360 mm

Dimensions and Weight:

Height:

2.616 mm

Width:

3.150 mm

Length:

3.886 mm

Weight:

7.000 kg

Buyer Information:

Condition:

[Like New](#)

Availability:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[16 %](#)

Location:


Germany




1




2

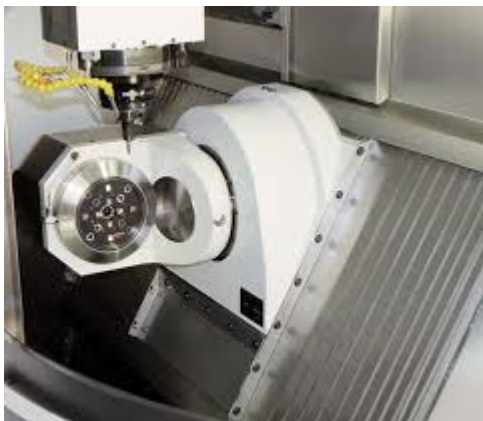

3

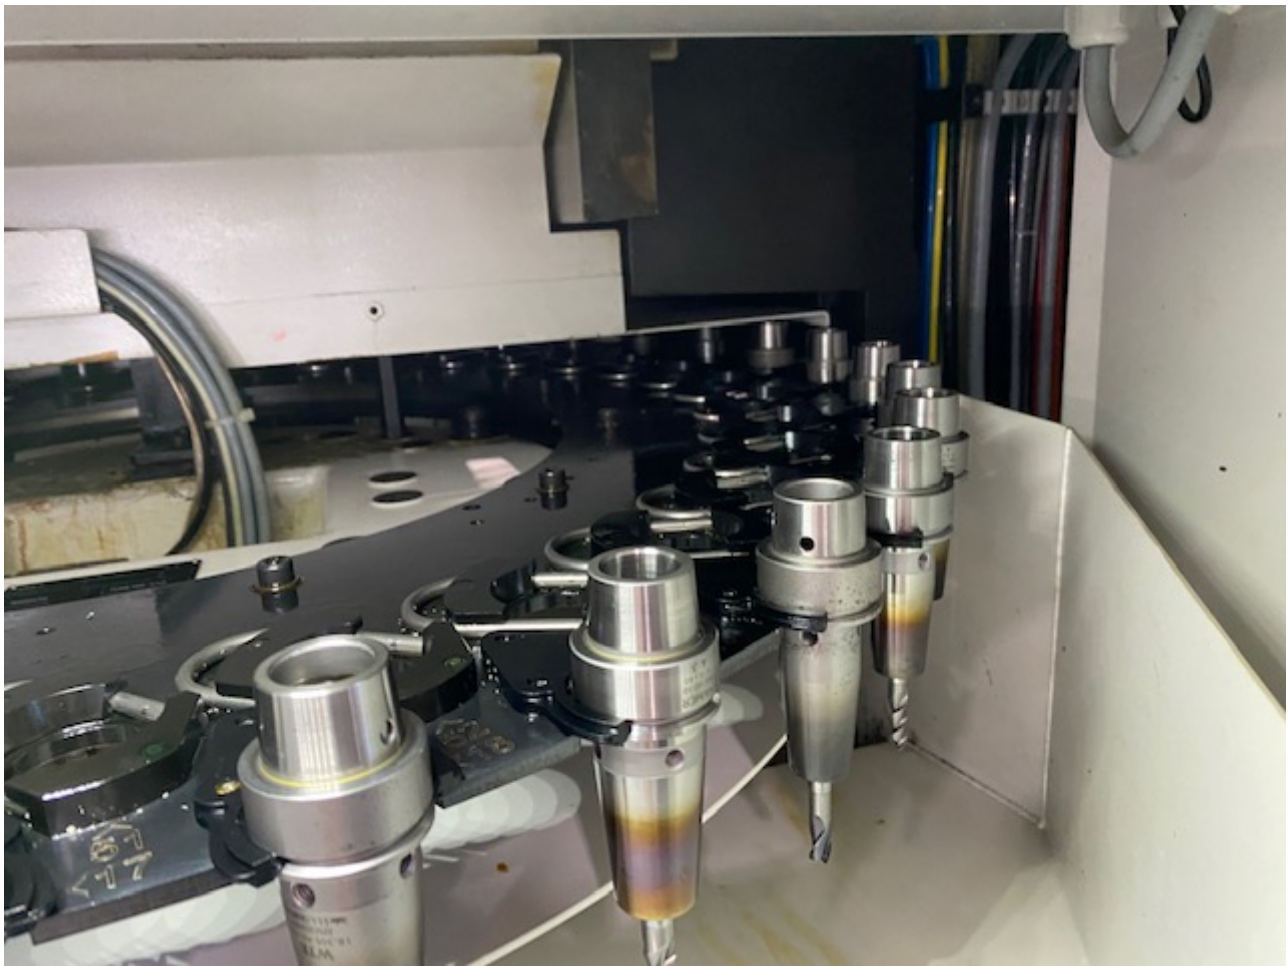

4

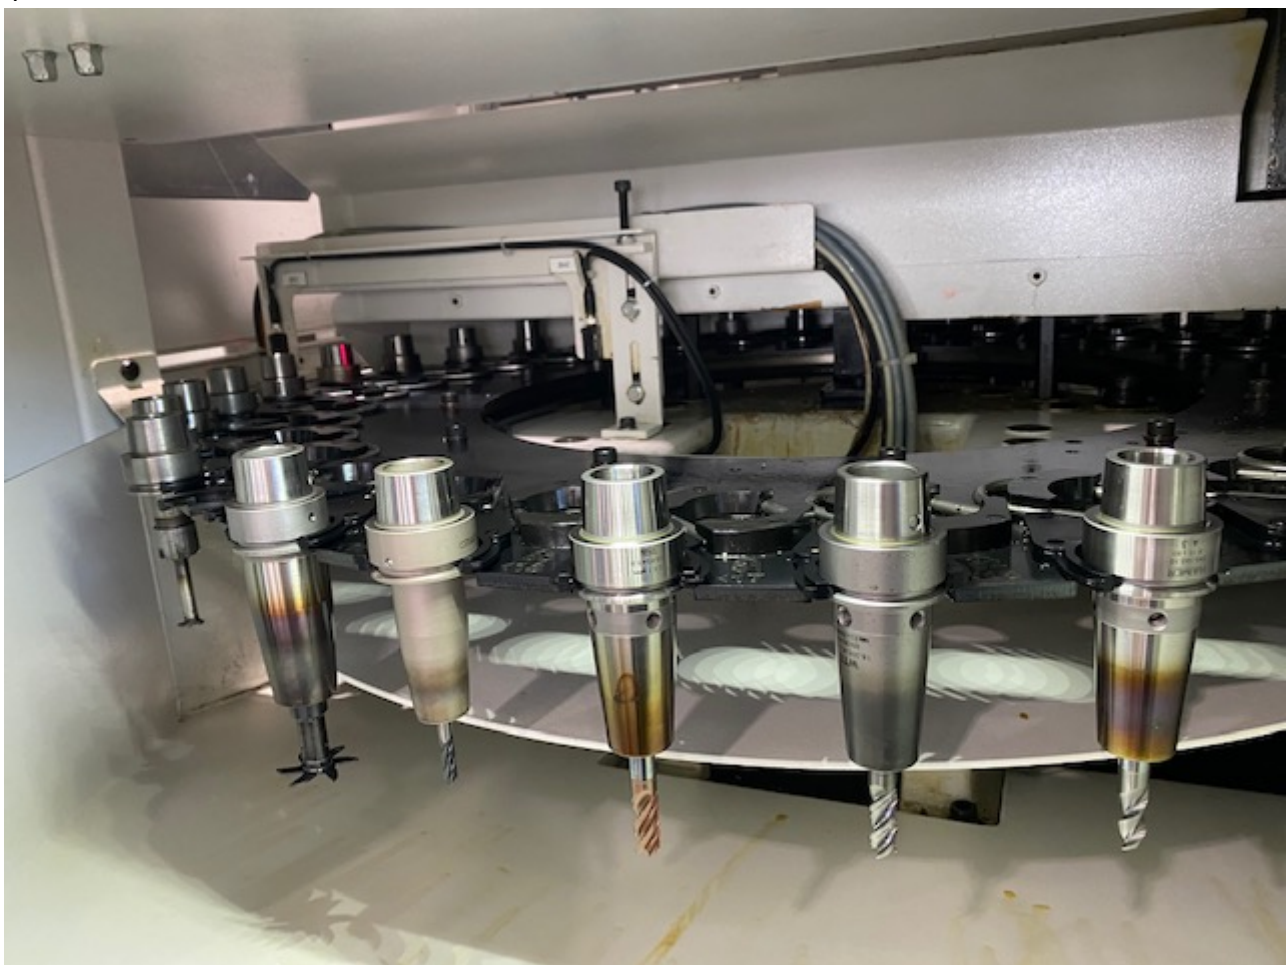

5



6




7



8



9

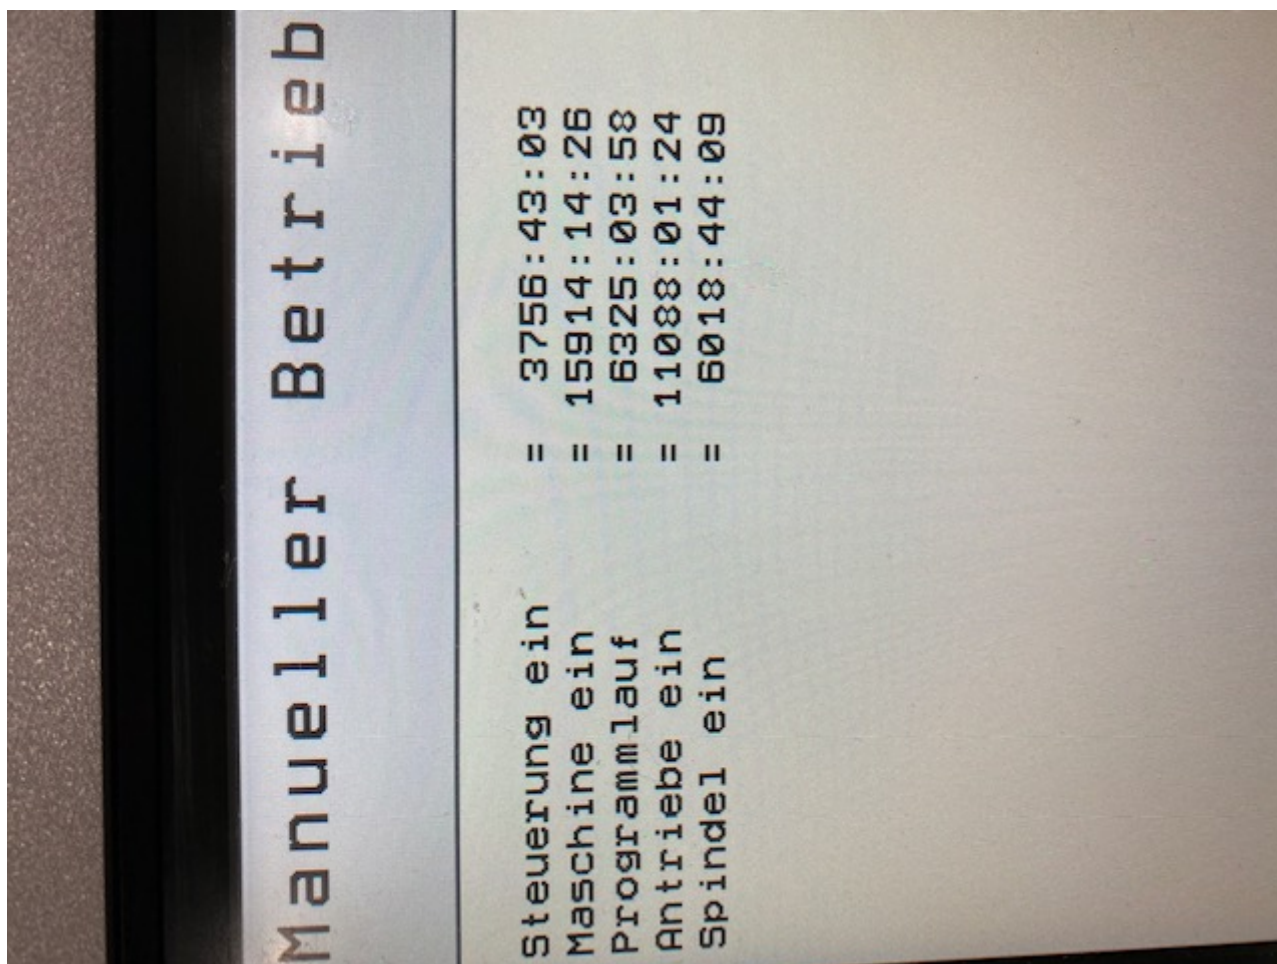

10



Step-Tec HVC140 Spindel

42 000 min⁻¹

**Hohe Geschwindigkeit,
herausragende
Präzision**

| | |
|----------------------------|---------------------------------|
| Abmessungen | Ø 140 mm x 492 mm |
| Werkzeug- schnittstelle | HSK-E40 DIN69063-1 |
| Leistung (S6) | 13.5 kW |
| Drehmoment (S6) | 8.8 Nm |
| Max. Drehzahl | 42,000 min ⁻¹ |
| Beschleunigung | 2.5 s |
| Encoder | 1 Vpp Incr. 128 |
| Schmierung | Öl-Luft |
| Abdichtung | Twin-Air-Dichtsystem |
| CoolCore | optional |
| Gewicht | 35 kg |
| Antriebsmodul | Siemens, Heidenhain, Fanuc, etc |

Optional CoolCore Variante
AMS-Messfühler für Wärmeausdehnungs-
kompensation in z-Richtung

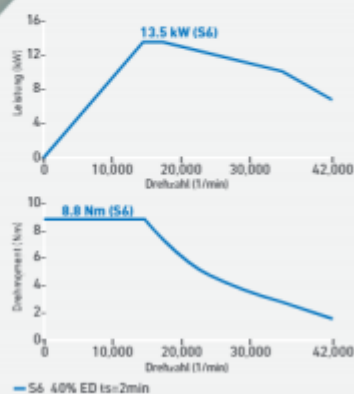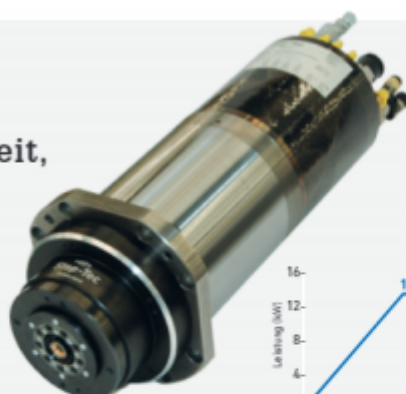

11



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 05.01.2026

© Copyright 2026 - [Asset-Trade](#)

Page