

Image not found or type unknown



Ref. No.:
1301-01311200

Overview and Technical Data:

Buy complete Used Coal Power plant

[AEG](#)

AEG

Year of Build:
Jan 1985

Description:

This Coal Power plant is no longer Available:

We have access to different Coal Power plants from 30 MW to 60 MW around the world.

Buy Complete Coal Power Station with 5 MW Steam-Turbine and Electric Power Generator

High-pressure radiation boiler with traveling grate firing system Water tube boiler with natural circulation

The total hours of operation: 282.720 hours

The last major overhaul date (Turbine): Summer 2019

The last generator rewind date: Rotor: Summer 2017 rewind, Stator: 2007 small repair winding

Year of construction 1985 / frequently modernized and updated !!

Technical data of Boiler :

- Steam capacity max continuous: 30 tons/hour
- Steam capacity temporary peak: 34 tons/hour
- Permissible operating pressure: 90 bar
- Hot steam temperature: 500 °C
- Permissible heat output: 27.6 MW
- Feed water temperature: 105-130 °C
- Operating days / year: approx. 300 days
- Fuel: hard coal
- Days of Operation per year: 300 days

Coal/Fuel Data:

- Storage capacity: 2.000 tons
- Daily consumption: 80-100 tons
- Trough chain conveyor: 40/80 tons/hour

Flue gas cleaning unit:

- 2 zones electric separator
- Flue gas discharge via induced draft speed controlled
- Frequently modernized and updated
- Chimney mouth: 70,5m

Feed water supply:

- full desalination: 2x 15m³/h
- mixed bed filter: 2x 30 m³/h
- Condensate cooling by air preheating
- Feed water tank useful capacity: 30 m³
- Full load pump
 - 1x with E-drive speed controlled
 - 1x with turbo drive speed controlled, with quick start device

AEG - KANIS - back pressure turbo type G16

Year of construction 1984 / frequently modernized and updated

to drive a three-phase synchronous generator

Technical data AEG LDW (SIEMENS):

- Pumping capacity: 34 t/h
- Overpressure at inlet: 76 bar
- Overpressure at outlet: 2,5-7.5 bar
- Rotational speed: 12.000/1500 min⁻¹
- Voltage: 10.5 KV
- Terminal power max: 5.200 KW

Technical data AEG steam turbine:

- Turbine power: 5.275 kW
- Turbine speed: 12.107 min -1
- Turbine high speed: 13318 min -1
- Turbine steam pressure: 78 bar
- Suction steam temperature: 490 -500 °C
- Turbine exhaust steam pressure 3.5 - 8.5 bar
- Direction of rotation left, seen in direction of turbine-gear-generator

The Power Station is still in use and can be inspected by appointment in the South of Germany. It will become available for dismantling in 2024.

Advantages of Steam Power Plants :

- Fuel used is cheaper.
- They can respond quickly with changes in load on the plant.
- Space required is less compared to hydro power plants.
- A portion of steam can be used as process steam for various industries.
- They can be overloaded up to 20% without difficulty. Cost of electric power generation and its initial cost is less compared to diesel plants.
- Can be located near the load centre conveniently thus reduces the transmission line cost and loss of energy in transmission lines.

Technical Data:

Technical Data:

Control:

[CNC](#)

Buyer Information:

Condition:

[Very good condition](#)

Available:

[On Request](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[8 %](#)

Location:

Germany

Images:



1



2





4



5





7



8









BABCOCK

Deutsche Babcock Anlagen AG

Hersteller, Name u. Land
Man. Name & Country

Herst.-Serien-Nr.
Man. Serial No.

35.2432.300

Herst.-Jahr
Year of Man.

1984

Montagefirma
Erected by

Auslegungsvorschrift
Design Code

AD

Auslegungstemperatur
Design Temperature

200

°C

Auslegungsdr. od. Vakuum
Design Press. int. Vacuum

20 / -1

bar(g)

Prüfdruck
Test Press.

3,9

bar(g)

Wärmebehandlung
Heat Treatment

Inhalt
Capacity

32500

Abnahmeorganisation
Inspection Authority

TUV

Speisewasserbehälter

Kennzeichnung und Benennung
of Code & Description



13



14



15



16



17



18

Kohle-Förderbandwaage

=HKW +FBW

Control panel with indicator lights and buttons:

- Green indicator light (top left)
- Green indicator light (top middle)
- Grey indicator light (top right)
- Red indicator light (top right)
- Red indicator light (top right)
- Red indicator light (middle left)
- Blue indicator light (middle left)
- White indicator light (middle middle)
- Red indicator light (middle right)
- Black indicator light (middle right)

Central digital display unit with a screen showing **0.0** and a keypad.

Yellow and red emergency stop button.

Grey metal cable tray containing several electrical cables.

Terminal block with blue and orange terminals.





21



22















AEG-KAN I

TURBINENFABRIK GM

Turbinen Nr.	18883/000	Schnellschlußdr
Typ	G 16	Zudampfdruck
Baujahr	1984	Zudampftemper
Leistung	5275kW	Anzapfdruck
Drehzahl	12107min ⁻¹	Abdampfdruck
Drehrichtung	links	gesehen in Richtung Turbin



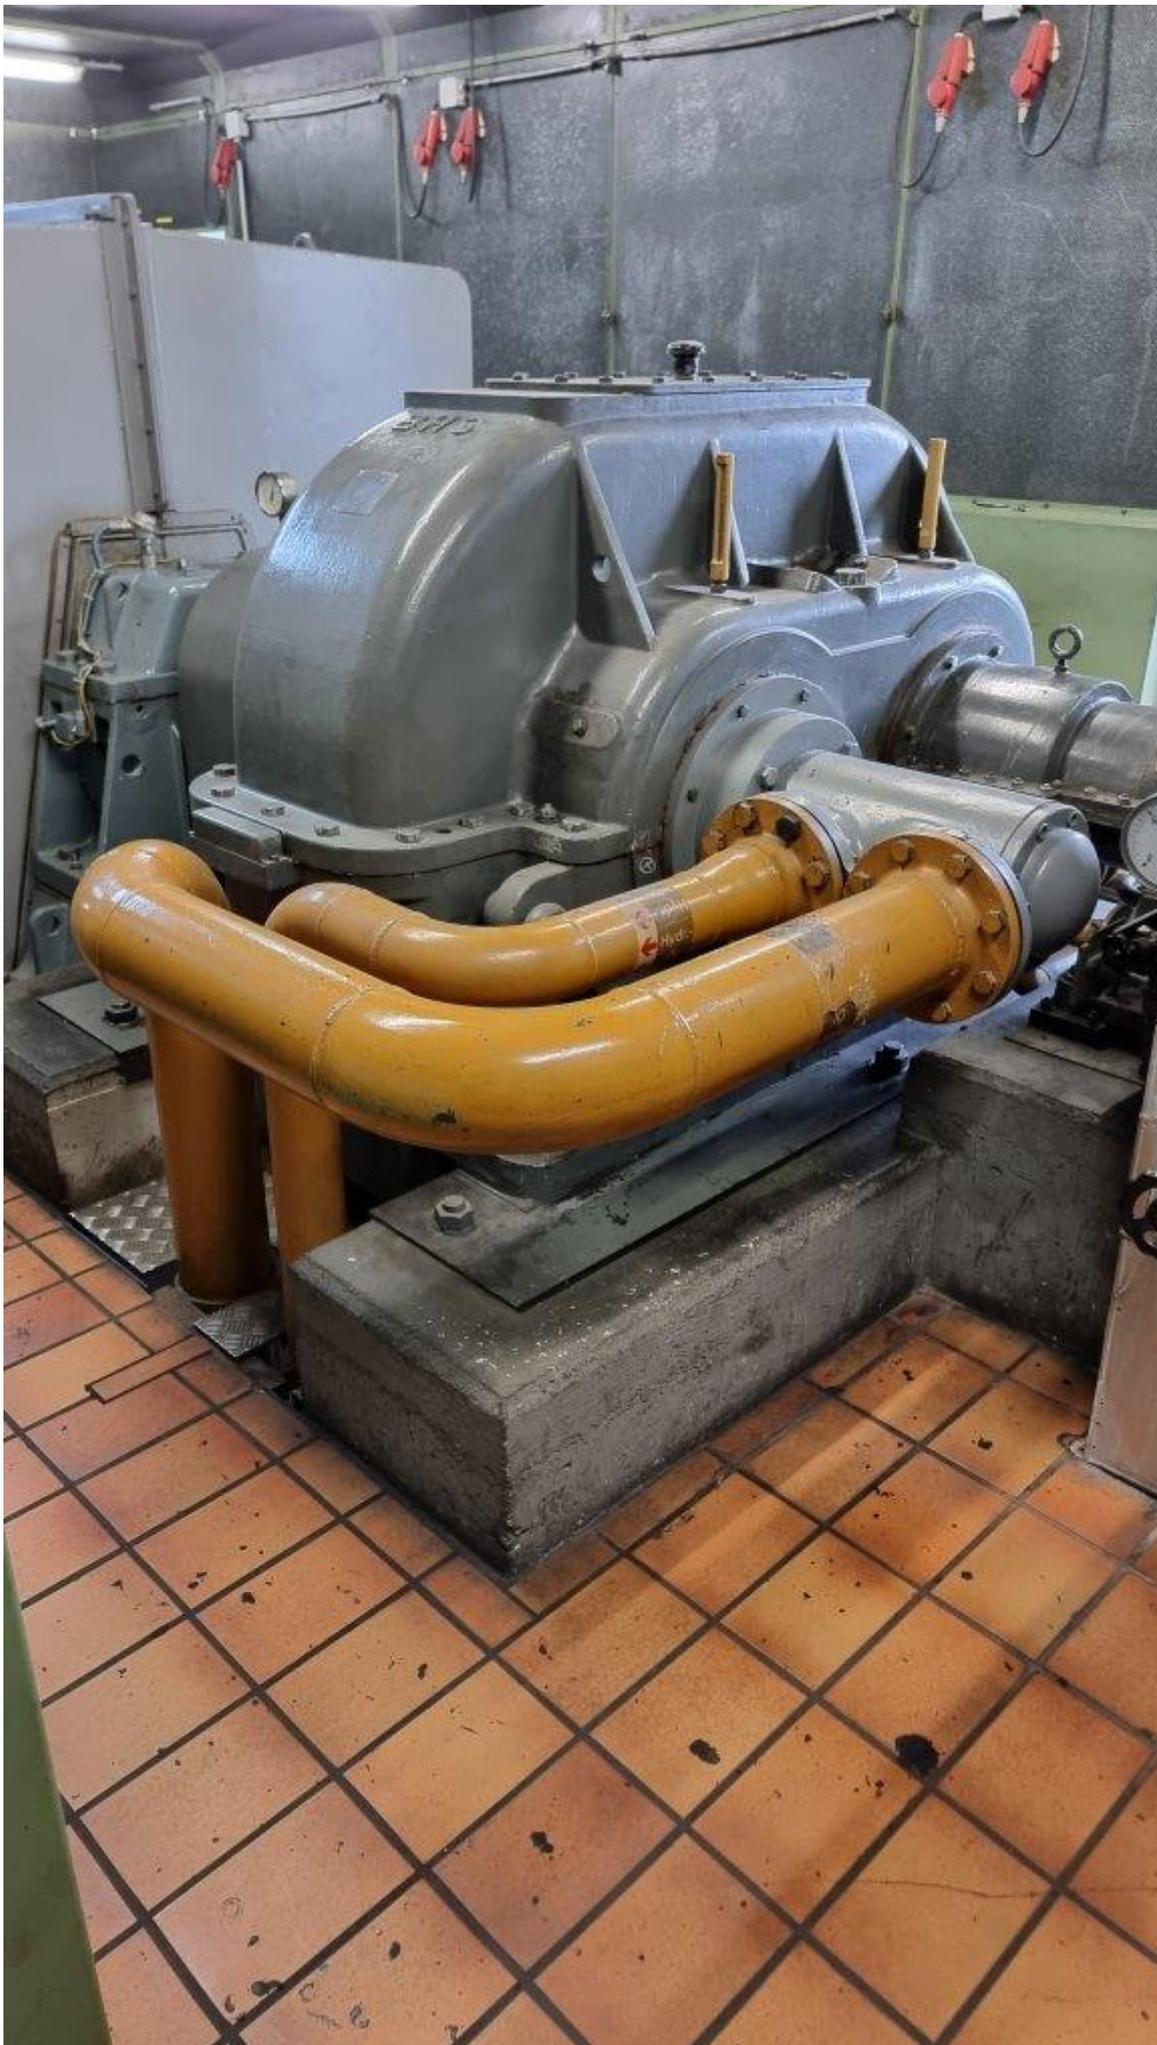

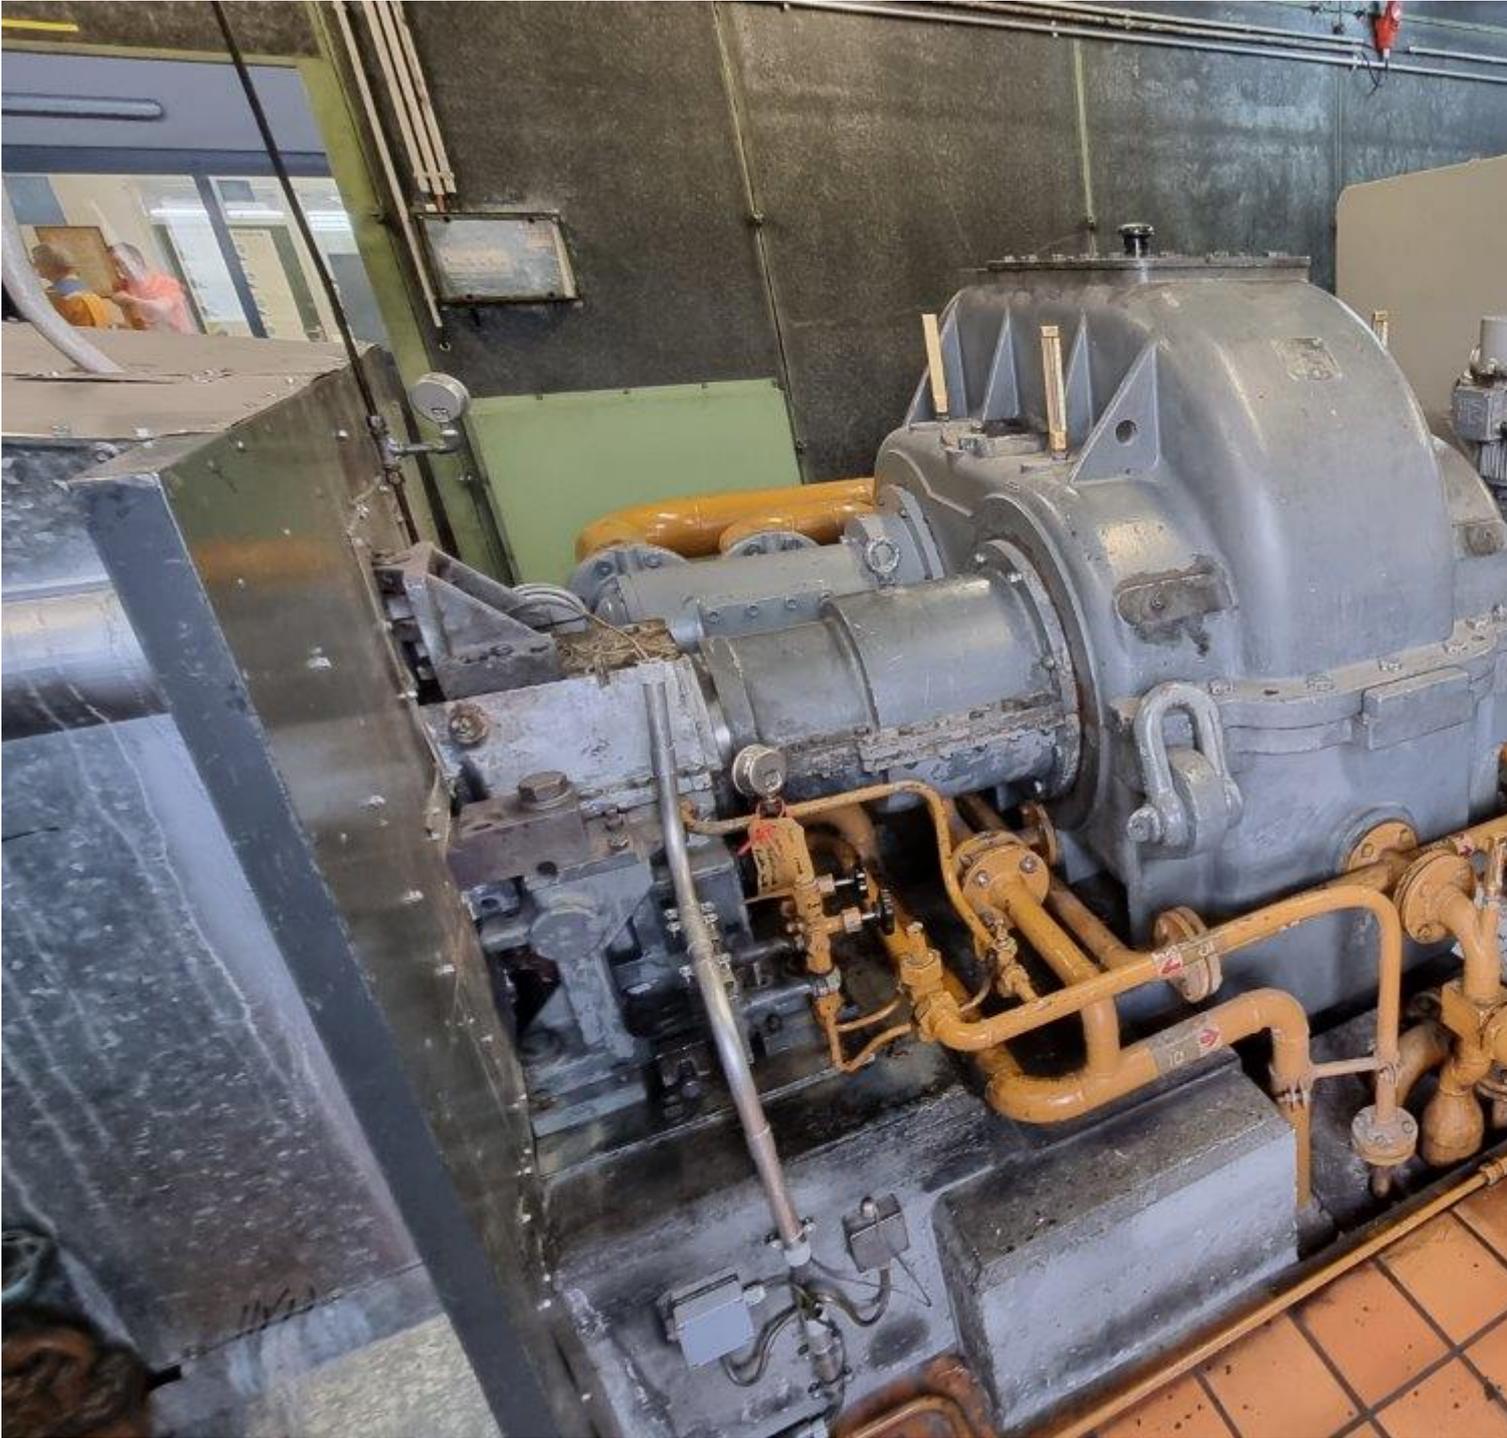

AEG-Rotaduct®

Bürstenlose Synchron - Maschine
Erreger - Maschine eingebaut

450-105 x 87 LGW 701

AEG

2340

DKBL 606/04 + DEVA

Nr. 84-4/6 503

3 ~ 500

Y 0500 V

396 A

10 107












REGENERIERWASSERBEHAELTER

NEUTRALISATIONSBEHAELTER

GEFÄHRLICHER RAUM
Erdgas mit Kohlenmonoxid
Frühwarnsystem vorhanden

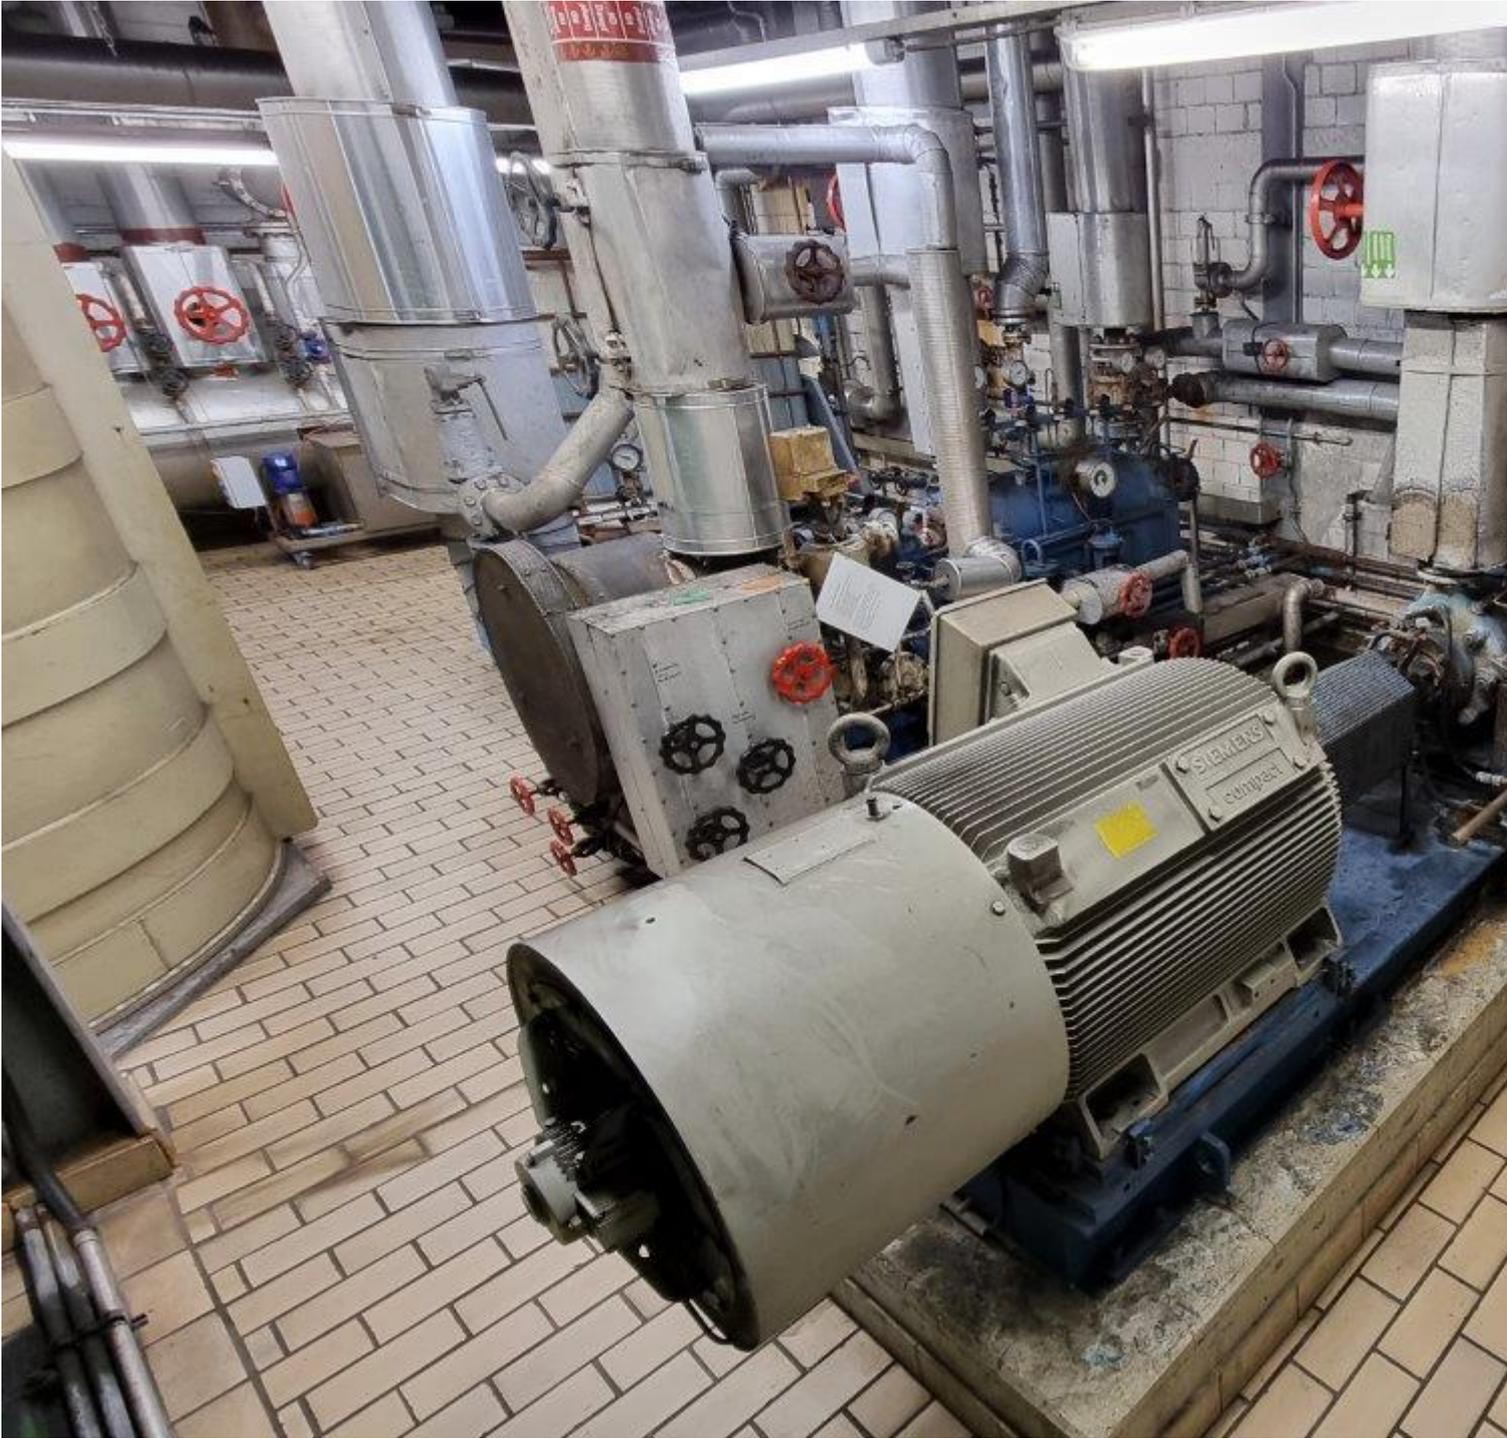







Video:



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:
1301-01311200

Overview and Technical Data:

Buy complete Used Coal Power plant

AEG

AEG

Year of Build:
Jan 1985

Description:

This Coal Power plant is no longer Available:

We have access to different Coal Power plants from 30 MW to 60 MW around the world.

Buy Complete Coal Power Station with 5 MW Steam-Turbine and Electric Power Generator

High-pressure radiation boiler with traveling grate firing system Water tube boiler with natural circulation

The total hours of operation: 282.720 hours

The last major overhaul date (Turbine): Summer 2019

The last generator rewind date: Rotor: Summer 2017 rewind, Stator: 2007 small repair winding

Year of construction 1985 / frequently modernized and updated !!

Technical data of Boiler :

- Steam capacity max continuous: 30 tons/hour
- Steam capacity temporary peak: 34 tons/hour
- Permissible operating pressure: 90 bar
- Hot steam temperature: 500 °C
- Permissible heat output: 27.6 MW
- Feed water temperature: 105-130 °C
- Operating days / year: approx. 300 days
- Fuel: hard coal
- Days of Operation per year: 300 days

Coal/Fuel Data:

- Storage capacity: 2.000 tons
- Daily consumption: 80-100 tons
- Trough chain conveyor: 40/80 tons/hour

Flue gas cleaning unit:

- 2 zones electric separator
- Flue gas discharge via induced draft speed controlled
- Frequently modernized and updated
- Chimney mouth: 70,5m

Feed water supply:

- full desalination: 2x 15m³/h
- mixed bed filter: 2x 30 m³/h
- Condensate cooling by air preheating
- Feed water tank useful capacity: 30 m³
- Full load pump
 - 1x with E-drive speed controlled
 - 1x with turbo drive speed controlled, with quick start device

AEG - KANIS - back pressure turbo type G16

Year of construction 1984 / frequently modernized and updated

to drive a three-phase synchronous generator

Technical data AEG LDW (SIEMENS):

- Pumping capacity: 34 t/h
- Overpressure at inlet: 76 bar
- Overpressure at outlet: 2,5-7.5 bar
- Rotational speed: 12.000/1500 min⁻¹
- Voltage: 10.5 KV
- Terminal power max: 5.200 KW

Technical data AEG steam turbine:

- Turbine power: 5.275 kW
- Turbine speed: 12.107 min⁻¹
- Turbine high speed: 13318 min⁻¹
- Turbine steam pressure: 78 bar
- Suction steam temperature: 490 -500 °C
- Turbine exhaust steam pressure 3.5 - 8.5 bar
- Direction of rotation left, seen in direction of turbine-gear-generator

The Power Station is still in use and can be inspected by appointment in the South of Germany. It will become available for dismantling in 2024.

Advantages of Steam Power Plants :

- Fuel used is cheaper.
- They can respond quickly with changes in load on the plant.
- Space required is less compared to hydro power plants.
- A portion of steam can be used as process steam for various industries.
- They can be overloaded up to 20% without difficulty. Cost of electric power generation and its initial cost is less compared to diesel plants.
- Can be located near the load centre conveniently thus reduces the transmission line cost and loss of energy in transmission lines.

Technical Data:

Technical Data:

Control:

[CNC](#)

Buyer Information:

Condition:

[Very good condition](#)

Available:

[On Request](#)

Sold as:

EXW (Ex Works - Incoterm)

VAT:

19 %

Buyers Premium:

8 %

Location:

Germany

Images:



1



2





4



5





7



8









BABCOCK

Deutsche Babcock Anlagen AG

Hersteller, Name u. Land
Man. Name & Country

Herst.-Serien-Nr.
Man. Serial No.

35.2432.300

Herst.-Jahr
Year of Man.

1984

Montagefirma
Erected by

Auslegungsvorschrift
Design Code

AD

Auslegungstemperatur
Design Temperature

200

°C

Auslegungsdr. od. Vakuum
Design Press. int. Vacuum

20 / -1

bar(g)

Prüfdruck
Test Press.

3,9

bar(g)

Wärmebehandlung
Heat Treatment

Inhalt
Capacity

32500

Abnahmeorganisation
Inspection Authority

TUV

Speisewasserbehälter

Kennzeichnung und Benennung
of Code & Description



13



14



15



16



17



18

Kohle-Förderbandwaage

=HKW +FBW

Control panel with indicator lights and buttons:

- Green indicator light (top left)
- Green indicator light (top middle)
- Grey indicator light (top right)
- Red indicator light (top right)
- Red indicator light (top right)
- Red indicator light (middle left)
- Blue indicator light (middle left)
- White indicator light (middle middle)
- Red indicator light (middle right)
- Black indicator light (middle right)

Central digital display unit with a screen showing **0.0** and a keypad.

Yellow and red emergency stop button.

Grey metal cable tray containing several electrical cables.

Terminal block with blue and orange connections.





21



22














AEG-KANI

TURBINENFABRIK GM

Turbinen Nr.	18883/000	Schnellschlußdr
Typ	G 16	Zudampfdruck
Baujahr	1984	Zudampf temper
Leistung	5275kW	Anzapfdruck
Drehzahl	12107min-1	Abdampfdruck
Drehrichtung	links	gesehen in Richtung Turbin





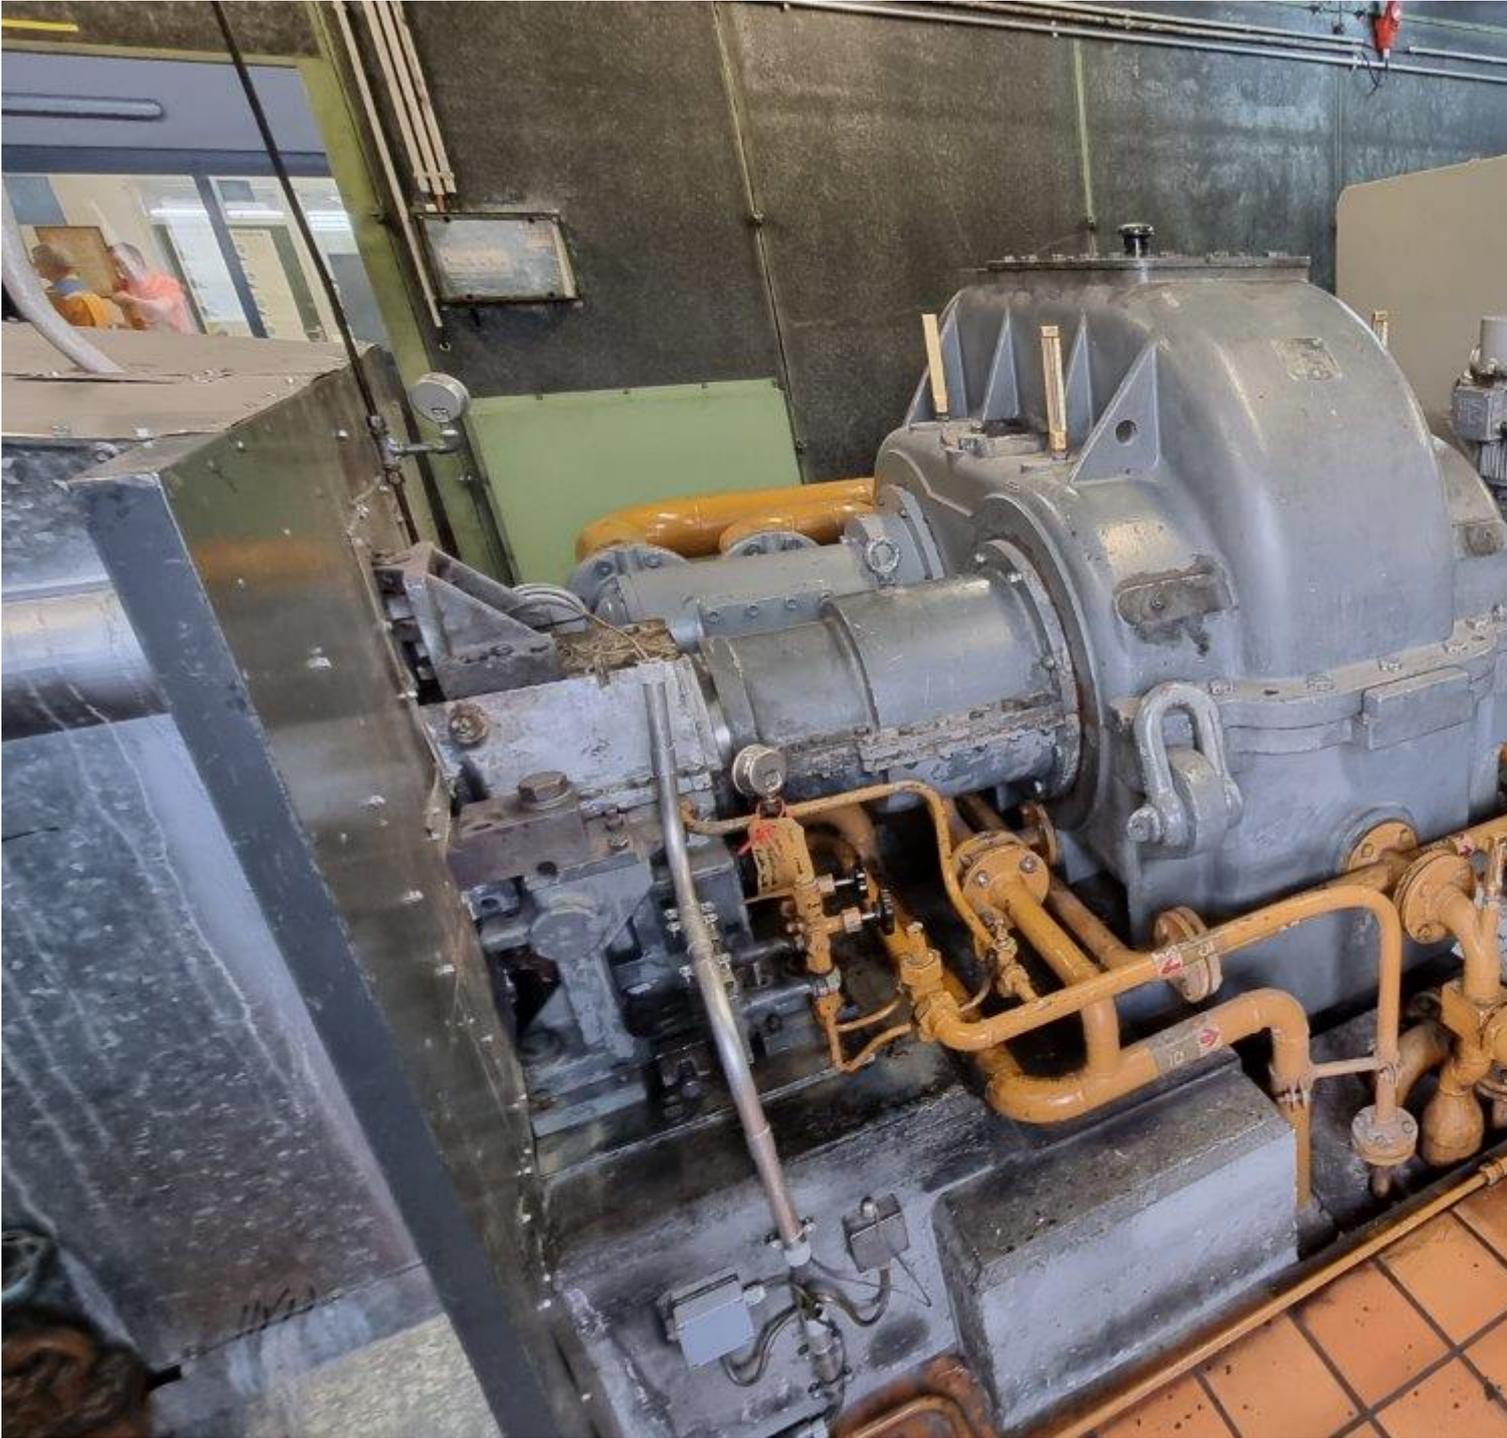

AEG-Rotaduct®

Bürstenlose Synchron - Maschine
Erreger - Maschine eingebaut

450-105 x 87 LGW 701

AEG

2340

DKBL 606/04 + DEVA

Nr. 84-4/6 523

V

Y 0500

396 A












REGENERIERWASSERBEHAELTER

NEUTRALISATIONSBEHAELTER

GEFAHRLICHER RAUM
Erdgas mit Sauerstoffmangel
Erstickungsgefahr

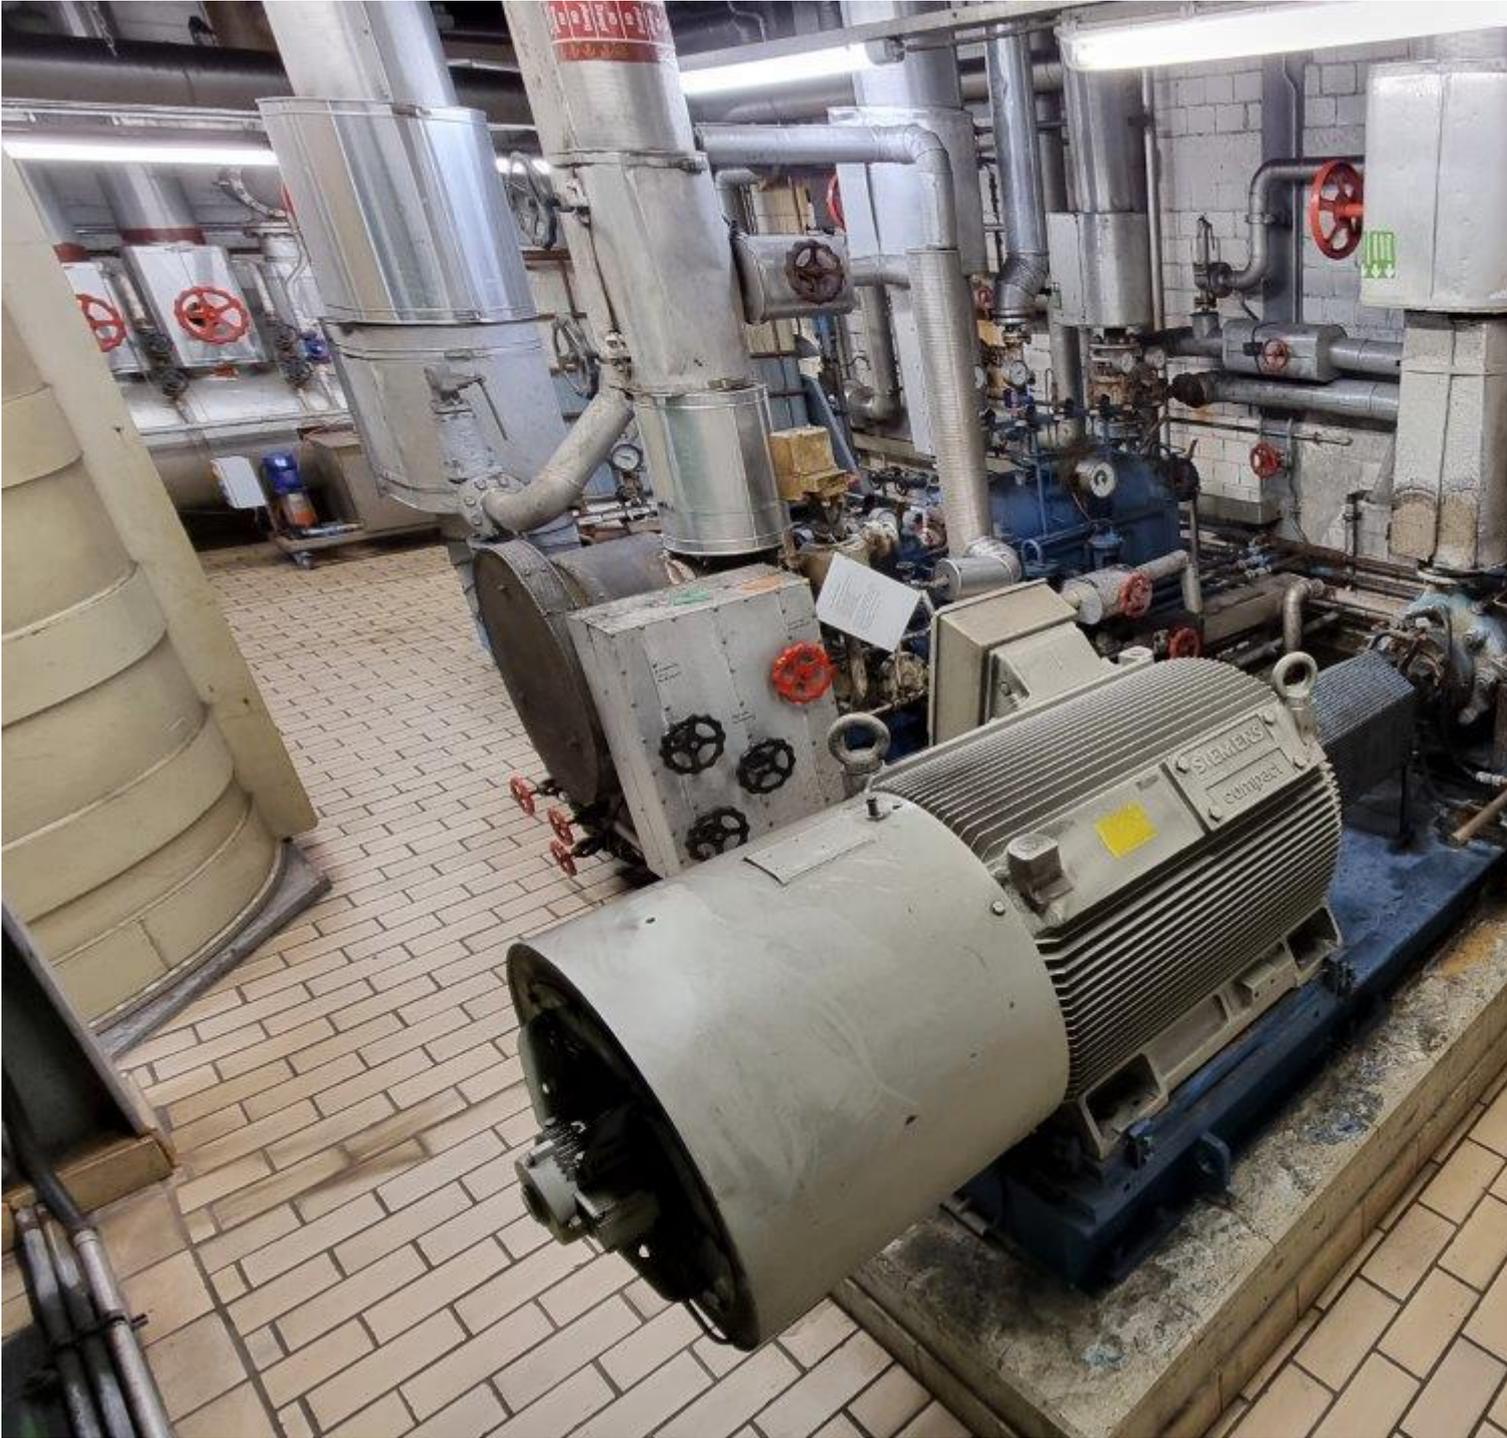







Video:



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 16.05.2026

© Copyright 2026 - [Asset-Trade](#)

Page