

Image not found or type unknown



Ref. No.:

1231-080111900

Overview and Technical Data:

SW BA-400-2 5-Axis Twin Spindle Milling

[SW](#)

SWM

Year of Build:

Jan 2001

Description:

Used SW - BA 400-2 CNC 5-axis horizontal double spindle machining centre

Control: Siemens Sinumerik 840 D

Equipped with coolant system & chip conveyor

Technical data:

- Travel:
 - X-axis: 400 mm
 - Y-axis: 450 mm
 - Z-axis: 400 mm
 - Max. cutting feed in X/Y/Z: 40/40/40 m/min
 - Feed force X/Y/Z: 9250 N
- Spindle:
 - Spindle Speed range: 50 - 12,500 rpm
 - Torque: 2 x 120 Nm
 - Power (S6/40%ED): 2x 35 kW/2600 rpm
 - IKZ 40 bar
- 2-axis swivel unit consisting of:
 - NC swivel axis (A-axis)with face plate: D=225
 - 2 NC-tables (B-axis) approx. D=240 installed in a common traverse, as well as a tangential mandrel of min.800 Nm per B-axis
 - hydraulically clamped counter bearing
 - 5-fold rotary distributor (A-axis)
 - 5-fold rotary distributor (B-axis)
- Tools
 - Tool holder: HSK 63 DIN 69893
 - Number of places in the tool changer: 2 x 60 pieces
 - Standard: 70 mm
 - with one free neighbouring place each: 140 mm
 - with two free neighbouring places each: 160 mm
 - Chip-to-chip time 3,8 s
- Scope of delivery:
 - approx 50 tool holders
 - approx. 2 clamping bridge supports
 - NC rotary table: 2 NC tables (B axis), Ø approx. 240 mm
 - 1 swivel bridge 4 axes, 1 swivel bridge 5 axes
- Additional equipment:
 - Extension of machine hydraulics for clamping workpieces up to 250 bar at Q=9 l/min.
 - Oil distributor for NC rotary table
 - Extended coolant system
 - High pressure pump 70 bar/30 L
 - Automatic loading door
 - Signal light
 - Tool breakage control Laser system Blum
 - Memory extension 256 KByte
- Space requirement of the whole equipment (LxWxH) approx.: 3000x4700x3000 mm
- Machine weight approx. 13800 kg

The machine is in good condition and can be inspected under power at any time.

The advantage of multi-spindle machining is simultaneous machining of several workpieces thus considerably reducing costs. It is also possible to assign several workpieces to one spindle. In SW clamping fixtures, designed and manufactured in our plant.

Possible Milling Products will benefit from a SW multi-spindle machine center

- Exhaust manifolds
- Common Rail pump housings
- Hydraulic housings
- Wheel hubs for trucks
- Brackets
- Motor blocks
- Brake calipers
- Hinged tie bars
- Bearing caps
- Clamping chucks
- Caliper brackets
- Engine and gearbox housings

Since its launch the SW BA series is setting standards in the field of multi-spindle, heavy machining. Due to the excellent accessibility of the loading area from the front and from the top the machine can be loaded and unloaded manually or via an automated system - again in parallel with the machining process. For these machines SW is offering the multiple cnc controls

Efficiency.

There are many ways to machine steel and cast iron workpieces. But there are only a few allowing to reach an optimum result in view of the given situation. The SW BA class offers a machining center which has set standards in its class with regard to efficiency and performance and which will continue to do so. The BA 400 and BA 600 centers available with 2 or 4 spindles, with 4 and 5 axes which can be loaded in parallel with the machining process provide for the appropriate concept for your machining process.

Technical Data:

Technical Data:

Control:

[SINUMERIK 840D](#)

Spindle Speed:

12.500 rpm

Tool Holder:

[HSK-A63](#)

Tool Capacity:

120 x

Travels:

X-Axis:

400 mm

Y-Axis:
450mm
Z-Axis:
400 mm

Dimensions and Weight:

Height:
3.000 mm
Width:
4.700 mm
Length:
3.000 mm
Weight:
13.800 kg

Buyer Information:

Condition:
[Very good condition](#)
Availability:
[Sold](#)
Sold as:
[EXW \(Ex Works - Incoterm\)](#)
VAT:
[19 %](#)
Buyers Premium:
[18 %](#)
Location:
Germany

Images:



1

SINUMERIK

SIEMENS

700048 | ERBROCHENE RÖHRE GESCHLOSSEN

WKS	Position	Arbeitsbereich	Maximalpunkt	S1
X	0.000 mm	0.000	0 U/Am	
Y	0.000 mm	0.000	0 U/Am	
Z	0.000 mm	0.000	0 Grad	
A			100.0	
B	175.000 Grad	0.000		

Alphanumeric keypad with function keys:

- Row 1: A 7, B 8, C 9, D /, E (
- Row 2: F 4, G 5, H 6, I *, J)
- Row 3: K 1, L 2, M 3, N -, O |
- Row 4: P =, Q 0, R ., S +, T)
- Row 5: U, V, W, X, Y, Z
- Row 6: [Left Arrow], [Right Arrow], [Home], [End]
- Row 7: [Up Arrow], End, [Print], [Yellow Key]



Secondary keypad with alphanumeric keys:

- Row 1: X, Y, Z
- Row 2: A, B, U
- Row 3: V, S1, S2
- Row 4: W, Q, H
- Row 5: U, H



Control panel with various buttons and switches:

- Emergency stop button (red)
- Start button (green)
- Stop button (red)
- Reset button (green)
- Emergency stop button (red)
- Start button (green)
- Stop button (red)
- Reset button (green)
- Emergency stop button (red)
- Start button (green)
- Stop button (red)
- Reset button (green)

WARTUNG
WAHLBUCKEN
KASSE 2

Table with technical data:

...
...
...



Schreiber 01.04.2008

Druck und geringere Daten: E Lüfter 01.04.2008




3



4





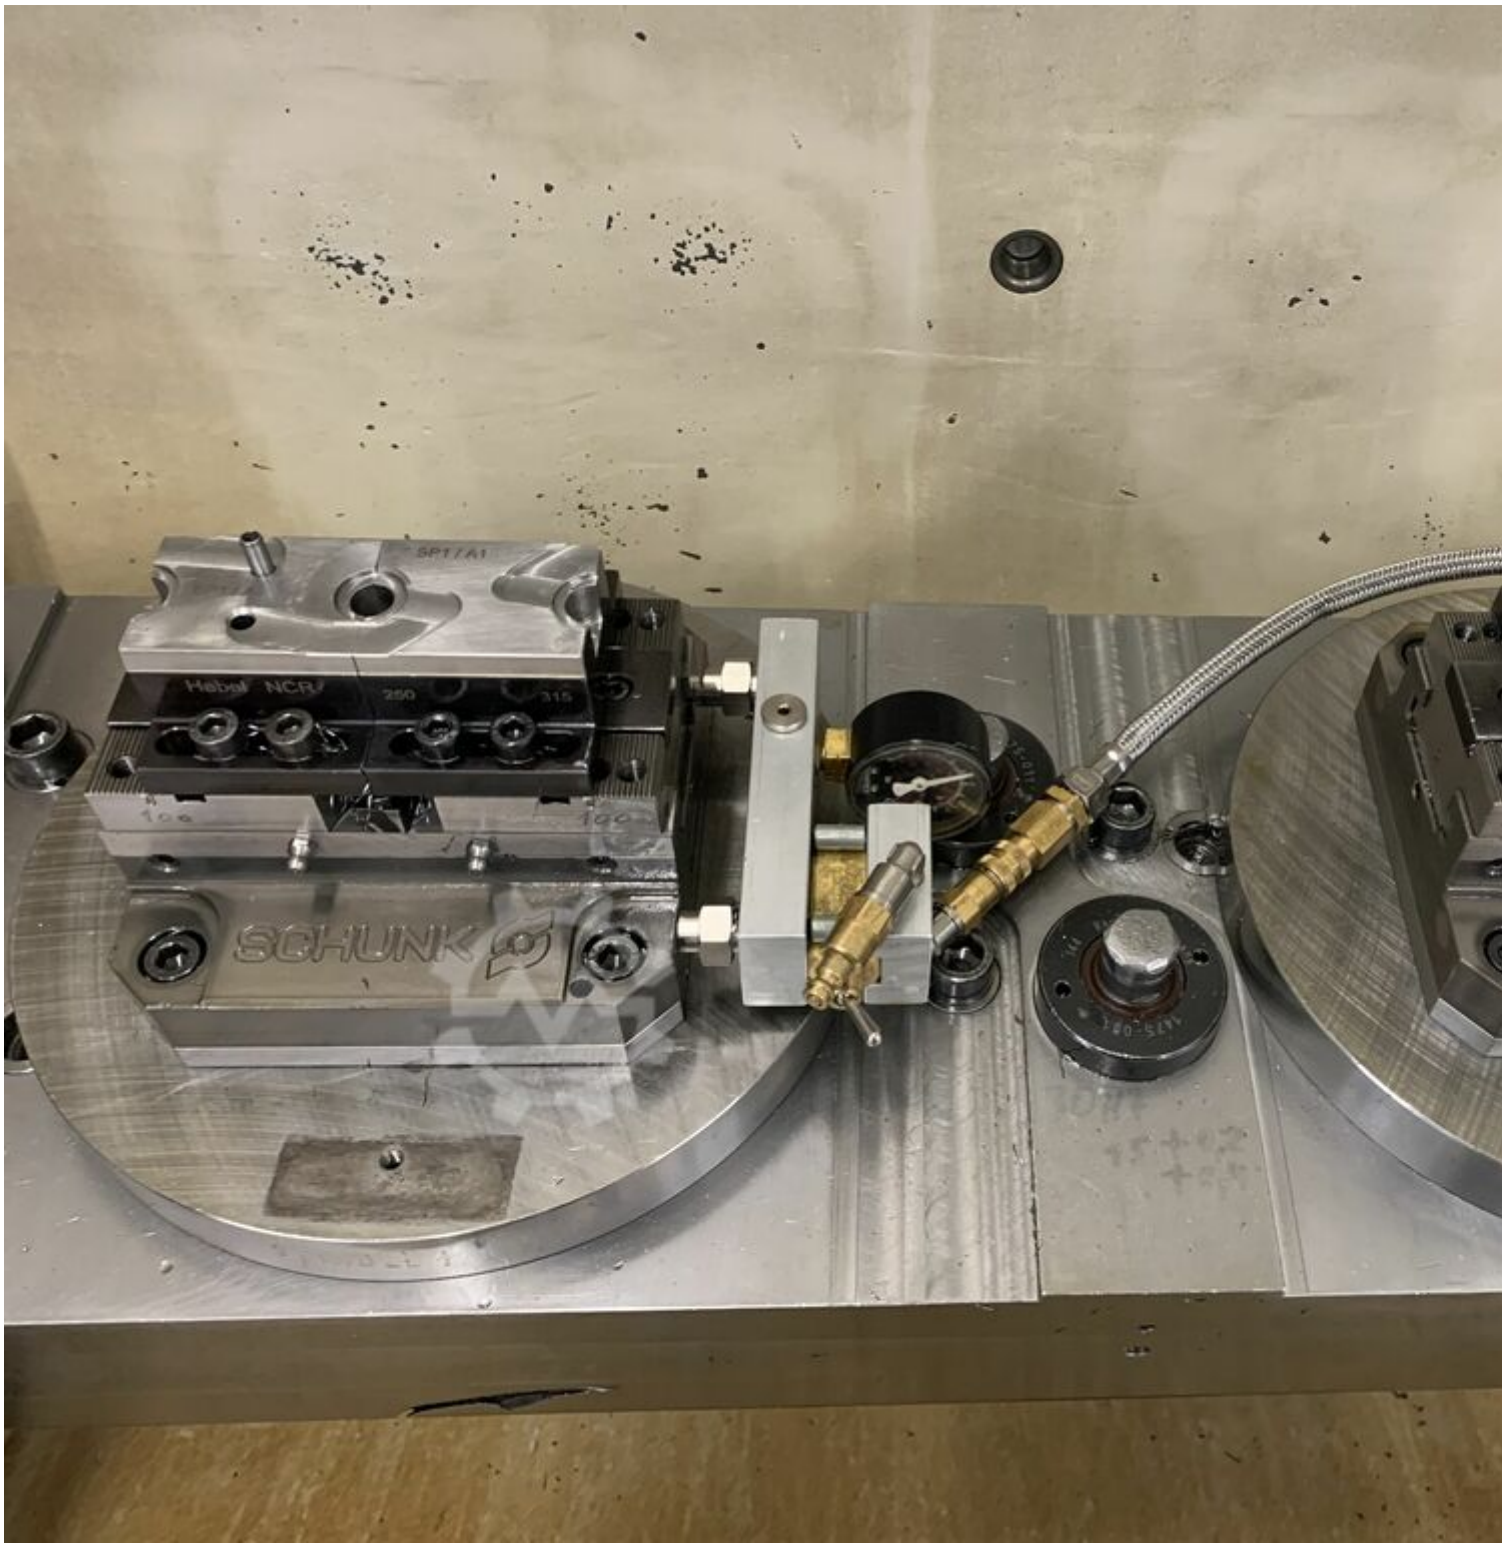



Schwäbische
Werkzeugmaschinen GmbH
Seedorfer Straße 91
D-78713 Schramberg-Waldm.

Typ / Masch.-Nr.
Type / Machine No.
Modèle / No Machine

BA 400-2

E-Plan Nr.
Circuit diagram no.
Schéma électrique no

Nennbetriebsspannung
Nominal operating voltage
Tension de service nominale

3/PE AC 400V/50Hz

Spindel
Spindle
Broche

S1 25KW

Nennbetriebsstrom
Nominal working current
Tension de service

108 A

Anschlußleistung
Total connected rating
Puissance total connectée

75 KVA

08-021



2001

8



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:

1231-080111900

Overview and Technical Data:

SW BA-400-2 5-Axis Twin Spindle Milling

[SW](#)

SWM

Year of Build:
Jan 2001

Description:

**Used SW - BA 400-2 CNC 5-axis horizontal double spindle
machining centre**

Control: Siemens Sinumerik 840 D

Equipped with coolant system & chip conveyor

Technical data:

- Travel:
 - X-axis: 400 mm
 - Y-axis: 450 mm
 - Z-axis: 400 mm

- Max. cutting feed in X/Y/Z: 40/40/40 m/min
- Feed force X/Y/Z: 9250 N
- Spindle:
 - Spindle Speed range: 50 - 12,500 rpm
 - Torque: 2 x 120 Nm
 - Power (S6/40%ED): 2x 35 kW/2600 rpm
 - IKZ 40 bar
- 2-axis swivel unit consisting of:
 - NC swivel axis (A-axis)with face plate: D=225
 - 2 NC-tables (B-axis) approx. D=240 installed in a common traverse, as well as a tangential mandrel of min.800 Nm per B-axis
 - hydraulically clamped counter bearing
 - 5-fold rotary distributor (A-axis)
 - 5-fold rotary distributor (B-axis)
- Tools
 - Tool holder: HSK 63 DIN 69893
 - Number of places in the tool changer: 2 x 60 pieces
 - Standard: 70 mm
 - with one free neighbouring place each: 140 mm
 - with two free neighbouring places each: 160 mm
 - Chip-to-chip time 3,8 s
- Scope of delivery:
 - approx 50 tool holders
 - approx. 2 clamping bridge supports
 - NC rotary table: 2 NC tables (B axis), Ø approx. 240 mm
 - 1 swivel bridge 4 axes, 1 swivel bridge 5 axes
- Additional equipment:
 - Extension of machine hydraulics for clamping workpieces up to 250 bar at Q=9 l/min.
 - Oil distributor for NC rotary table
 - Extended coolant system
 - High pressure pump 70 bar/30 L
 - Automatic loading door
 - Signal light
 - Tool breakage control Laser system Blum
 - Memory extension 256 KByte
- Space requirement of the whole equipment (LxWxH) approx.: 3000x4700x3000 mm
- Machine weight approx. 13800 kg

The machine is in good condition and can be inspected under power at any time.

The advantage of multi-spindle machining is simultaneous machining of several workpieces thus considerably reducing costs. It is also possible to assign several workpieces to one spindle. In SW clamping fixtures, designed and manufactured in our plant.

Possible Milling Products will benefit from a SW multi-spindle machine center

- Exhaust manifolds
- Common Rail pump housings
- Hydraulic housings
- Wheel hubs for trucks

- Brackets
- Motor blocks
- Brake calipers
- Hinged tie bars
- Bearing caps
- Clamping chucks
- Caliper brackets
- Engine and gearbox housings

Since its launch the SW BA series is setting standards in the field of multi-spindle, heavy machining. Due to the excellent accessibility of the loading area from the front and from the top the machine can be loaded and unloaded manually or via an automated system - again in parallel with the machining process. For these machines SW is offering the multiple cnc controls

Efficiency.

There are many ways to machine steel and cast iron workpieces. But there are only a few allowing to reach an optimum result in view of the given situation. The SW BA class offers a machining center which has set standards in its class with regard to efficiency and performance and which will continue to do so. The BA 400 and BA 600 centers available with 2 or 4 spindles, with 4 and 5 axes which can be loaded in parallel with the machining process provide for the appropriate concept for your machining process.

Technical Data:

Technical Data:

Control:

[SINUMERIK 840D](#)

Spindle Speed:

12.500 rpm

Tool Holder:

[HSK-A63](#)

Tool Capacity:

120 x

Travels:

X-Axis:

400 mm

Y-Axis:

450mm

Z-Axis:

400 mm

Dimensions and Weight:

Height:

3.000 mm

Width:

4.700 mm

Length:

3.000 mm

Weight:
13.800 kg

Buyer Information:

Condition:
[Very good condition](#)

Availability:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[18 %](#)

Location:

Germany

Images:



1

SINUMERIK

SIEMENS

700048 | ERBROCHENE ROHR GESCHLOSSEN

WKS	Position	Arbeitsbereich	Maßstab	S1
X	0.000 mm	0.000	0 U/Am	
Y	0.000 mm	0.000	0 U/Am	
Z	0.000 mm	0.000	0 grad	
A			100.0	
B	175.363 grad	0.000		

Alphanumeric keypad with function keys:

- Row 1: A 7, B 8, C 9, D /, E (
- Row 2: F 4, G 5, H 6, I *, J)
- Row 3: K 1, L 2, M 3, N -, O |
- Row 4: P =, Q 0, R ., S +, T)
- Row 5: U, V, W, X, Y, Z
- Row 6: [Left Arrow], [Right Arrow], [Home], [End]
- Row 7: [Up Arrow], End, [Print], [Yellow Key]



Secondary keypad with alphanumeric keys:

- Row 1: X, Y, Z
- Row 2: A, B, U
- Row 3: V, S1, S2
- Row 4: W, Q, H
- Row 5: U, H



Control panel with various buttons and switches:

- Emergency stop button (red)
- Start button (green)
- Stop button (red)
- Reset button (green)
- Emergency stop button (red)
- Start button (green)
- Stop button (red)
- Reset button (green)
- Emergency stop button (red)
- Start button (green)
- Stop button (red)
- Reset button (green)

HLUNG
AHL BÜCKEN
ASSE 2

Table with columns and rows, partially obscured by the control panel.



Schreiber 01.04.2008

Druck und geringere Daten E Lüfter 01.04.2008




3



4





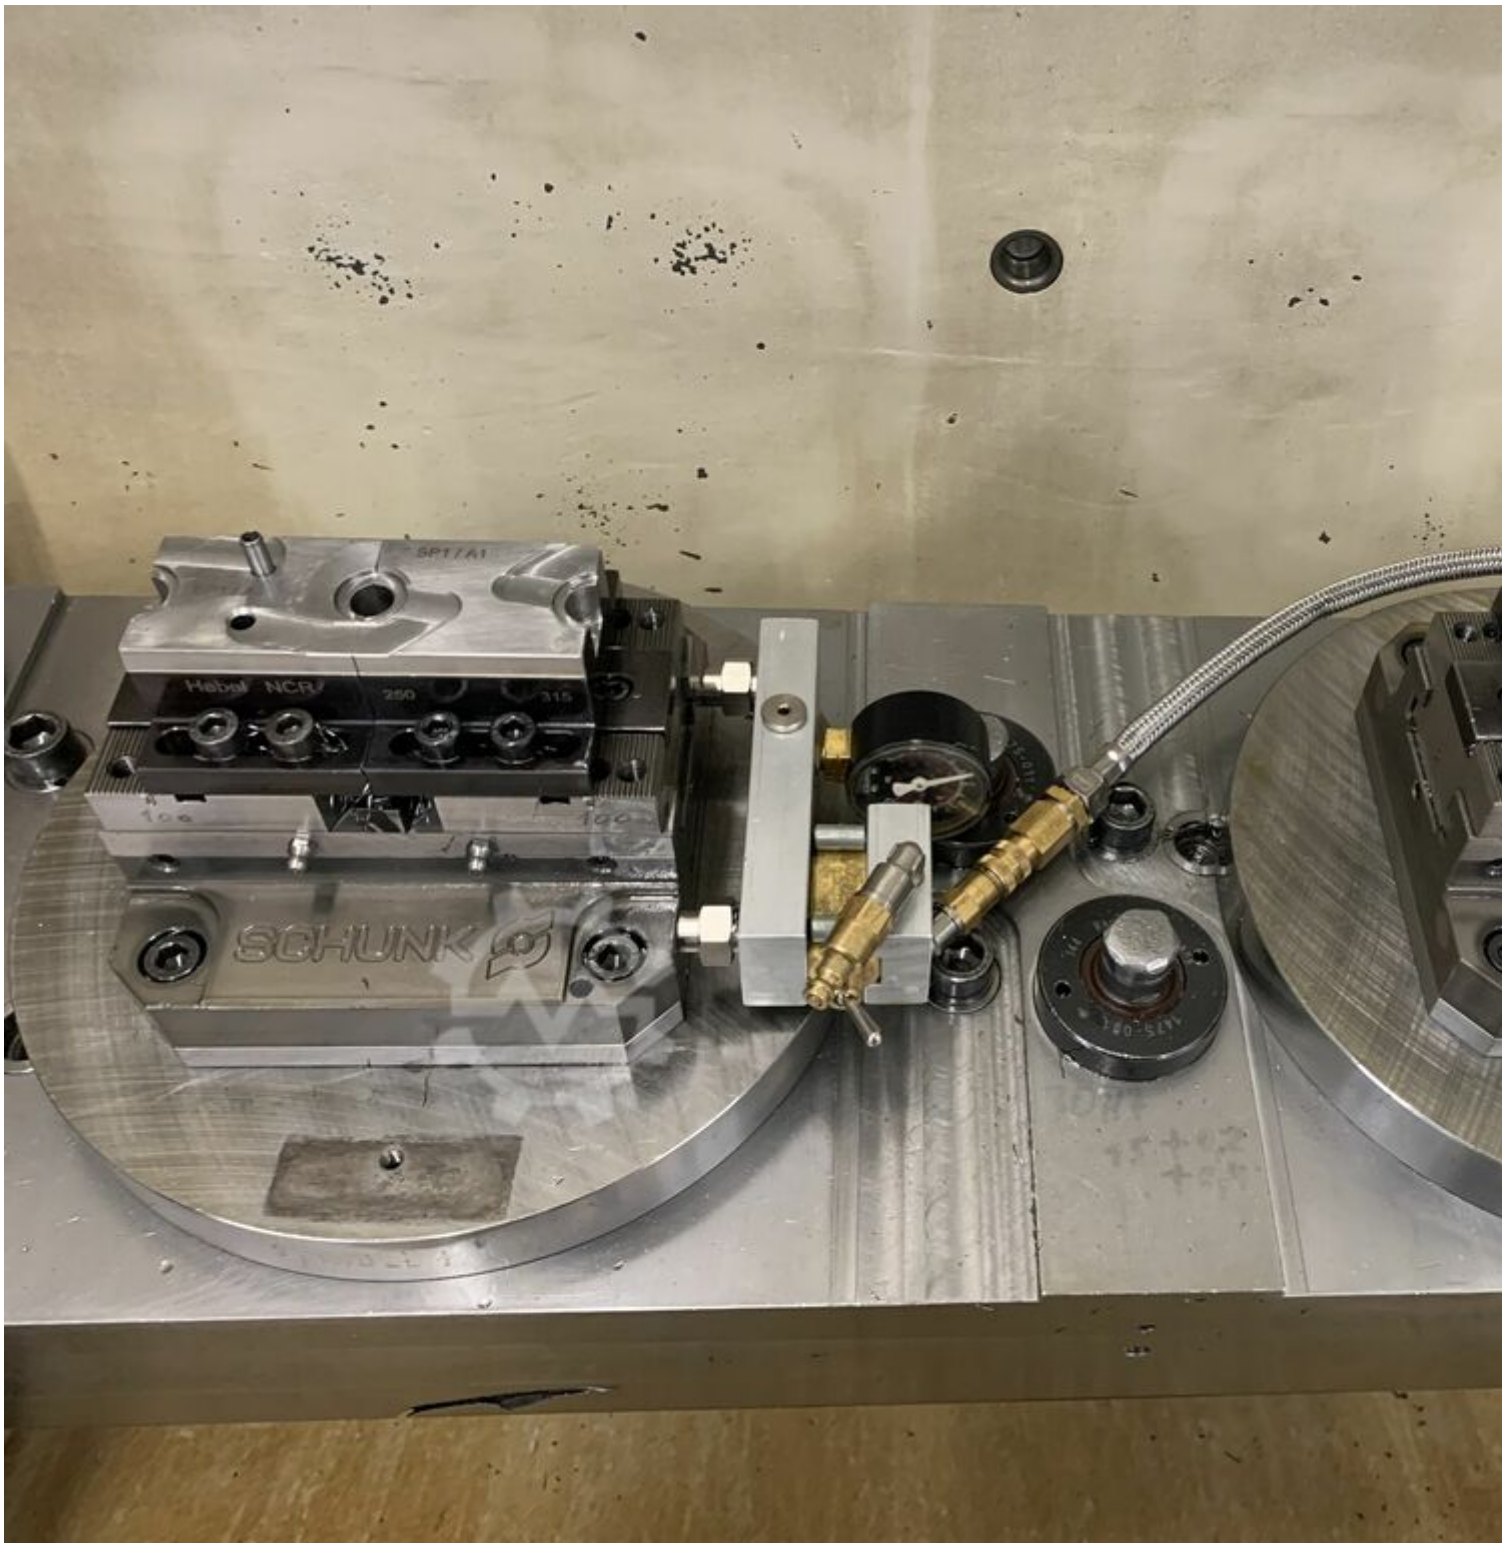



Schwäbische
Werkzeugmaschinen GmbH
Seedorfer Straße 91
D-78713 Schramberg-Waldm.

Typ / Masch.-Nr.
Type / Machine No.
Modèle / No Machine

BA 400-2

E-Plan Nr.
Circuit diagram no.
Schéma électrique no

Nennbetriebsspannung
Nominal operating voltage
Tension de service nominale

3/PE AC 400V/50Hz

Spindel
Spindle
Broche

S1 25KW

Nennbetriebsstrom
Nominal working current
Tension de service

108 A

Anschlußleistung
Total connected rating
Puissance total connectée

75 KVA

08-021



2001

8



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 27.04.2026

© Copyright 2026 - [Asset-Trade](#)

Page