

Image not found or type unknown



Ref. No.:

1350-12131222

## **Overview and Technical Data:**

# **DORST DK250 hydraulic press**

**[DORST](#)**



**DOO**

**TECHN**

Year of Build:  
Jan 1976  
Rebuild year:

Jan 2009

## **Description:**

# **Used DORST DK 250 Hydraulic Powder Press**

Was fully overhauled in 2009!!!

Operating Hour: 28975 h

## **Technical Data:**

- Sizing force 2,500 kN
- Upper punch stroke 350 mm
- Die stroke 70 mm
- Positioning accuracy  $\pm 0,01$  mm
- Stroke rate up to  $20 \text{ min}^{-1}$

Still in daily operation.

---

Hydraulic CNC sizing press designed for high productivity while maintaining tight tolerances of the sintered part.

Modular design, available for single-level parts or in multi-level design with the possibility of adding various automation solutions and additional functions.

## **Advantages**

- High mechanical and hydraulic rigidity
- Excellent productivity due to quick cycle rates
- Low energy consumption
- Special Intelligent Program Generator IPG to support the sizing process
- Installation at ground level without pit
- Closed-loop controlled die movement
- Small footprint
- Maximum precision
- Ultra-rigid machine frame
- Central force flow
- Up to 2 upper and 2 lower tool levels

The hydraulic powder press DORST DK 250 is an advanced machine designed to achieve high productivity while maintaining the tolerances of sintered parts. Thanks to its modular structure, it can be used for single or multi-level production, to which various automation solutions and additional functions can be added. The press has several features such as high mechanical and hydraulic rigidity, fast rotation speeds, low energy consumption and a special intelligent program generator (IPG) to support the size. In addition, it has small

dimensions, maximum precision, a very rigid machine frame, centralized power flow and up to 2 upper and 2 lower gear levels. The press was completely renovated in 2009 and is still in daily use, working time 28975h. With a design force of 2500 kN, a top of 350 mm, a stroke of 70 mm, a positioning accuracy of  $\pm 0.01$  mm and a travel speed of up to 20 min<sup>-1</sup>, this press is an excellent choice for any industry that wants it. to optimize its production process.

## **Technical Data:**

### **Technical Data:**

Control:

[CNC](#)

Machine Hours:

28975

### **Dimensions and Weight:**

Length:

3.150 mm

Width:

7.100 mm

### **Buyer Information:**

Condition:

[Very good condition](#)

Available:

[Immediately](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[18 %](#)

Location:

Slovenia

### **Images:**











PRI ČISTENJU ALI POPRAVILU  
STROJA OBVEZNO  
IZKLOPI GLAVNO STIKALO

GLAVNO STIKALO

-0.59



V SESELU V NEVARNO  
OBNOVLJE



# ST-15



ALUMINUM PRESSURE GAUGE  
SERIAL NO. 1000000000

ALUMINUM PRESSURE GAUGE  
SERIAL NO. 1000000000



● DIE SUPPORT CYLINDERS  
ARE POWERTECHNIA ASSOCIATES  
1 BAR = 00567 TON  
2 TON = 35 BAR  
4 TON = 71 BAR  
6 TON = 106 BAR  
8 TON = 141 BAR  
10 TON = 176 BAR  
12 TON = 212 BAR  
14 TON = 247 BAR  
16 TON = 282 BAR

● DESIGNED AND MANUFACTURED BY:  
ARMSTRONG LYON HYDRAULICS LTD  
BROCKFIELD DRIVE - ANTREE,  
LIVERPOOL L9 7EN  
TEL:- 051-521-9556  
FAX:- 051-525-5963  
SERIAL No:- 30837/715


Letting agent  
The Bank

● THE LATEST INFORMATION  
ON ALL THE PRODUCTS  
AND SERVICES  
OF THE COMPANY  
IS AVAILABLE FROM  
OUR WEBSITE  
WWW.ALYON.CO.UK  
OR BY CONTACTING  
OUR SALES DEPARTMENT  
ON 051 521 9556




**NE SEGAJ V NEVARNO  
OBMOČJE**

- 1
- 2
- 3
- 4
- 5

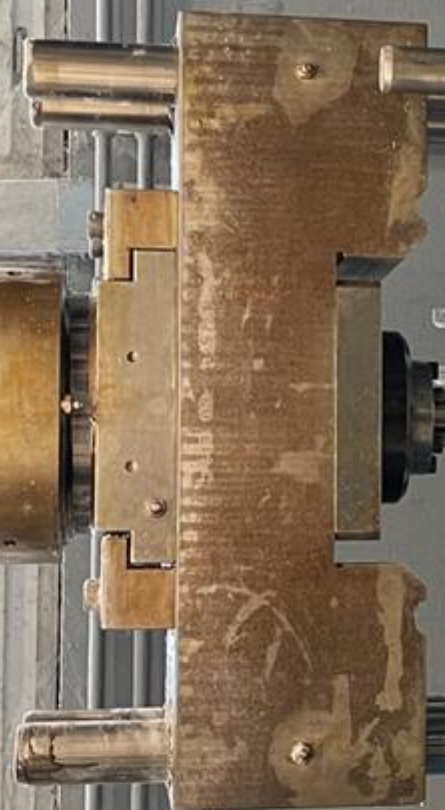



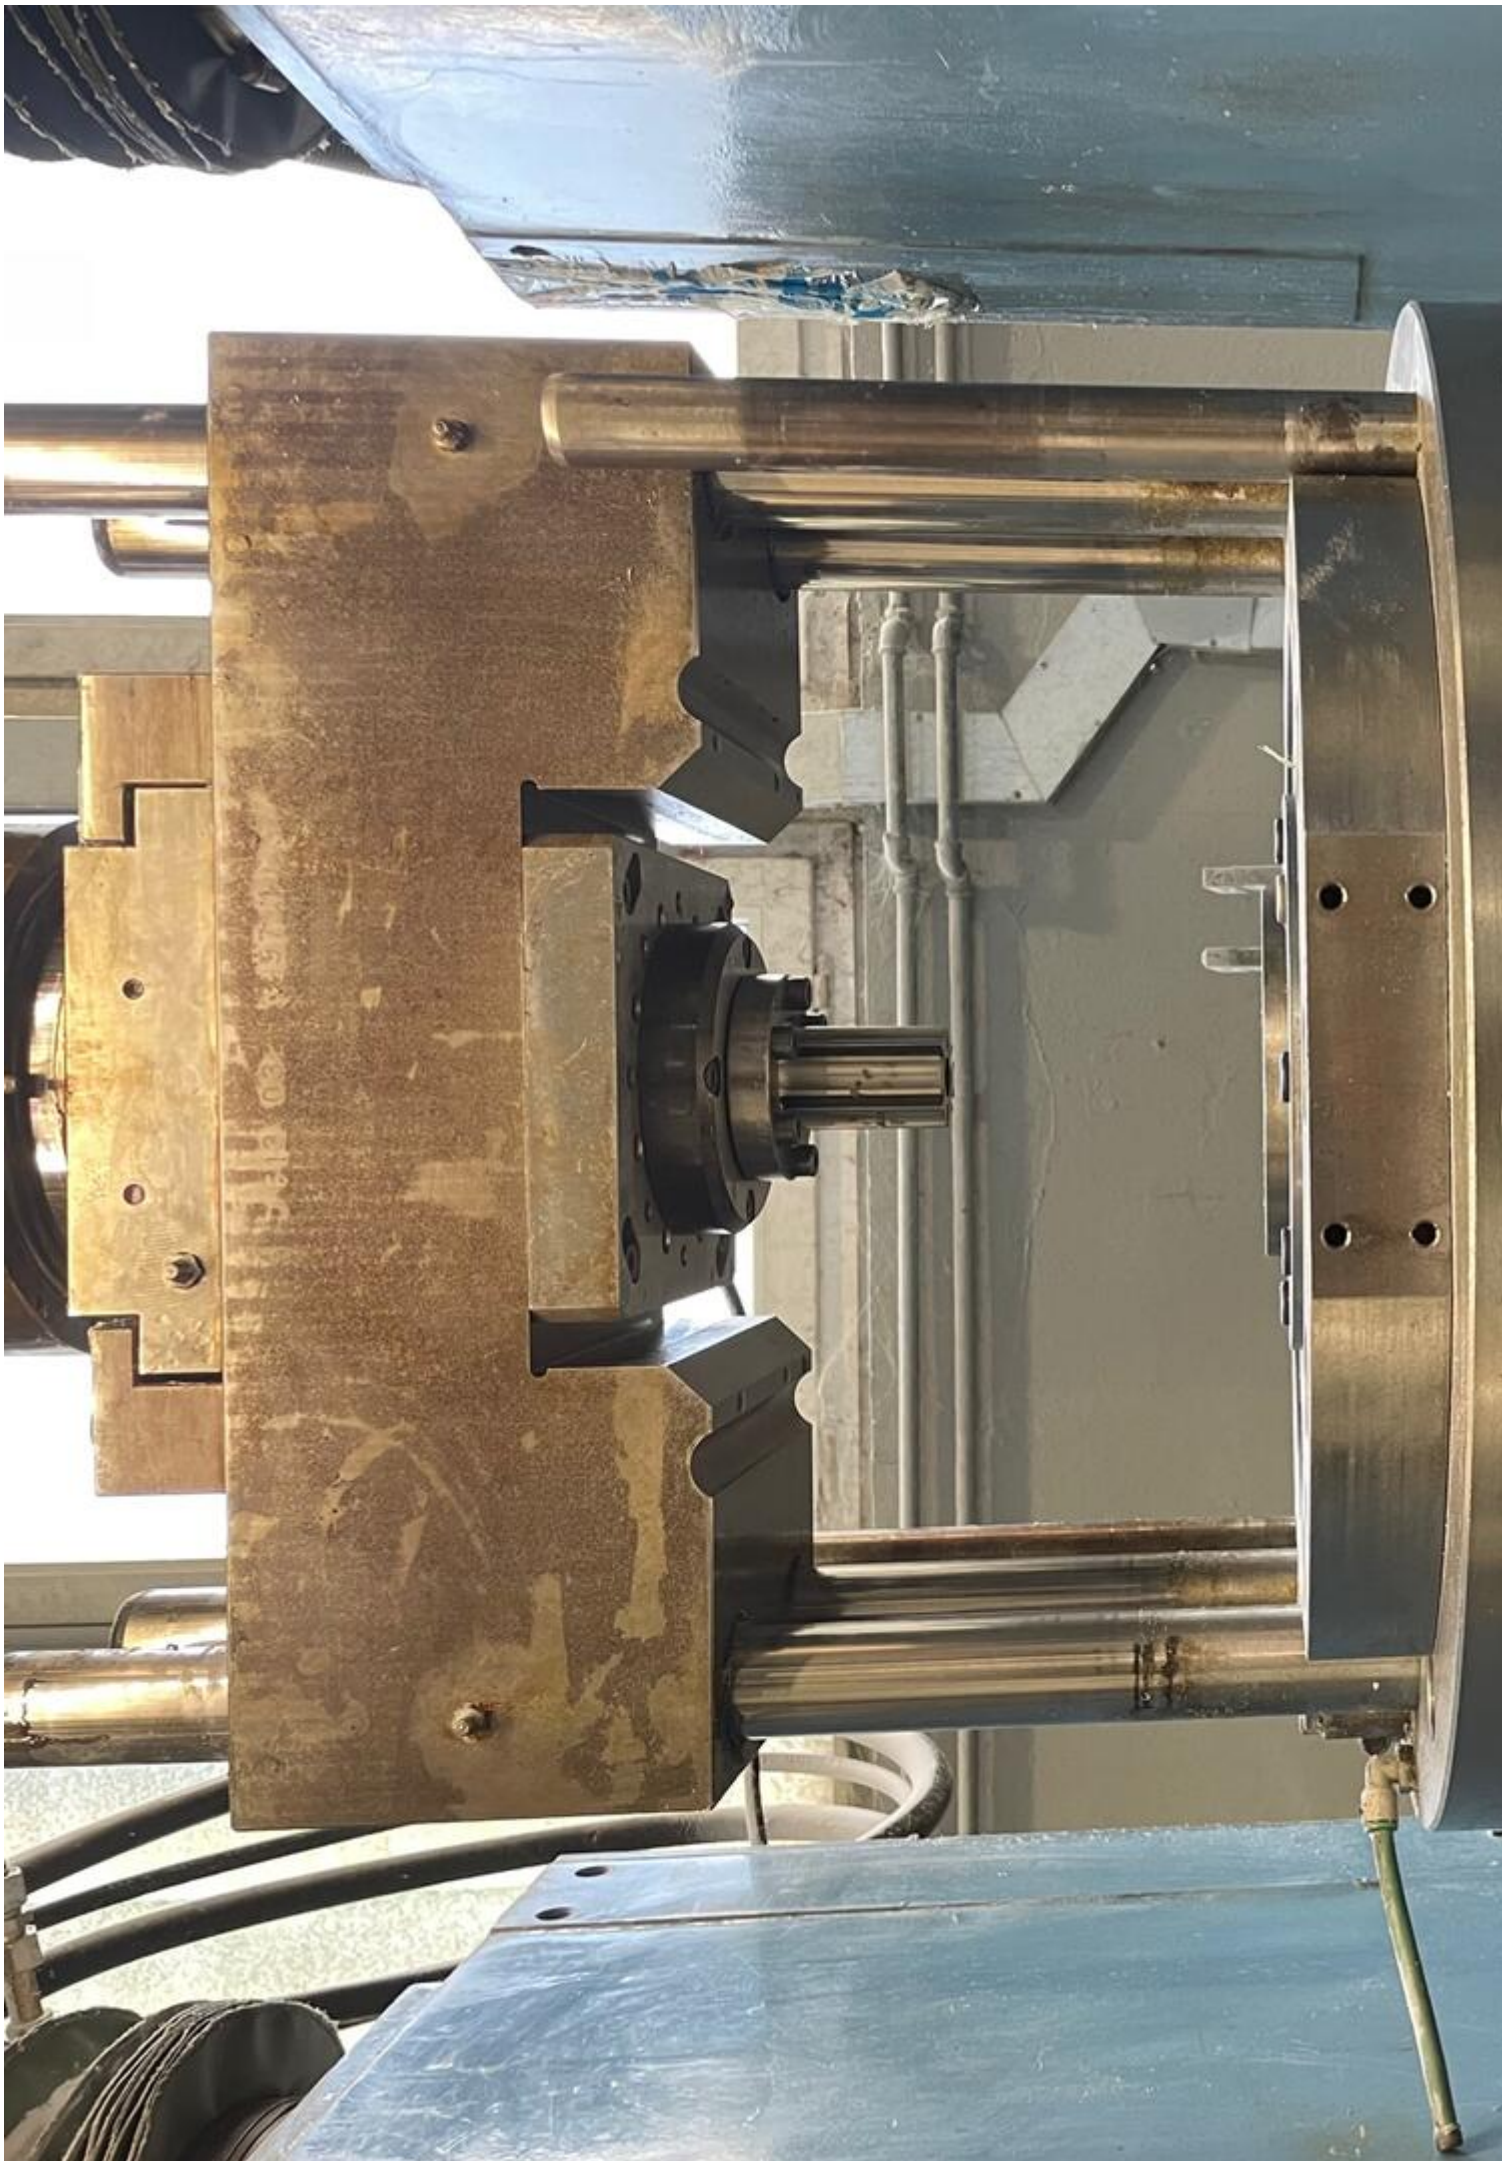









**NE SEGAJ V NEVARNO  
OBMOČJE**

- 1
- 2
- 3
- 4
- 5

Technical drawings and documents in a blue folder, including a diagram and a document with a logo.



**PRI ČIŠČENJU ALI POPRAVILU  
STROJA OBVEZNO  
IZKLOPI GLAVNO STIKALO**



Število hodov  
Na minuto



Hitrost +/-  
Gl. motor



[Levo/Desno]

[Gor/Dol]

[Gor/Dol]

[Levo/Desno]

Start Stop



[Gl. motor]

[Gor/Dol]



Zgornji izbijec

Alarm

Reset

[Reset]



[Varnost]

Izklop



Obratovanje

Vklop



[Varnost]

[Levo/Desno]



[Gl. motor]

[Gor]



[Jedro]

[Dol]



[Gor]

[Izmatac]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Gor]

[Vzmetna glava]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Gor]

[Gor]

[Polica]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]

[Dol]


[Dol]

[Dol]

[Dol]



9

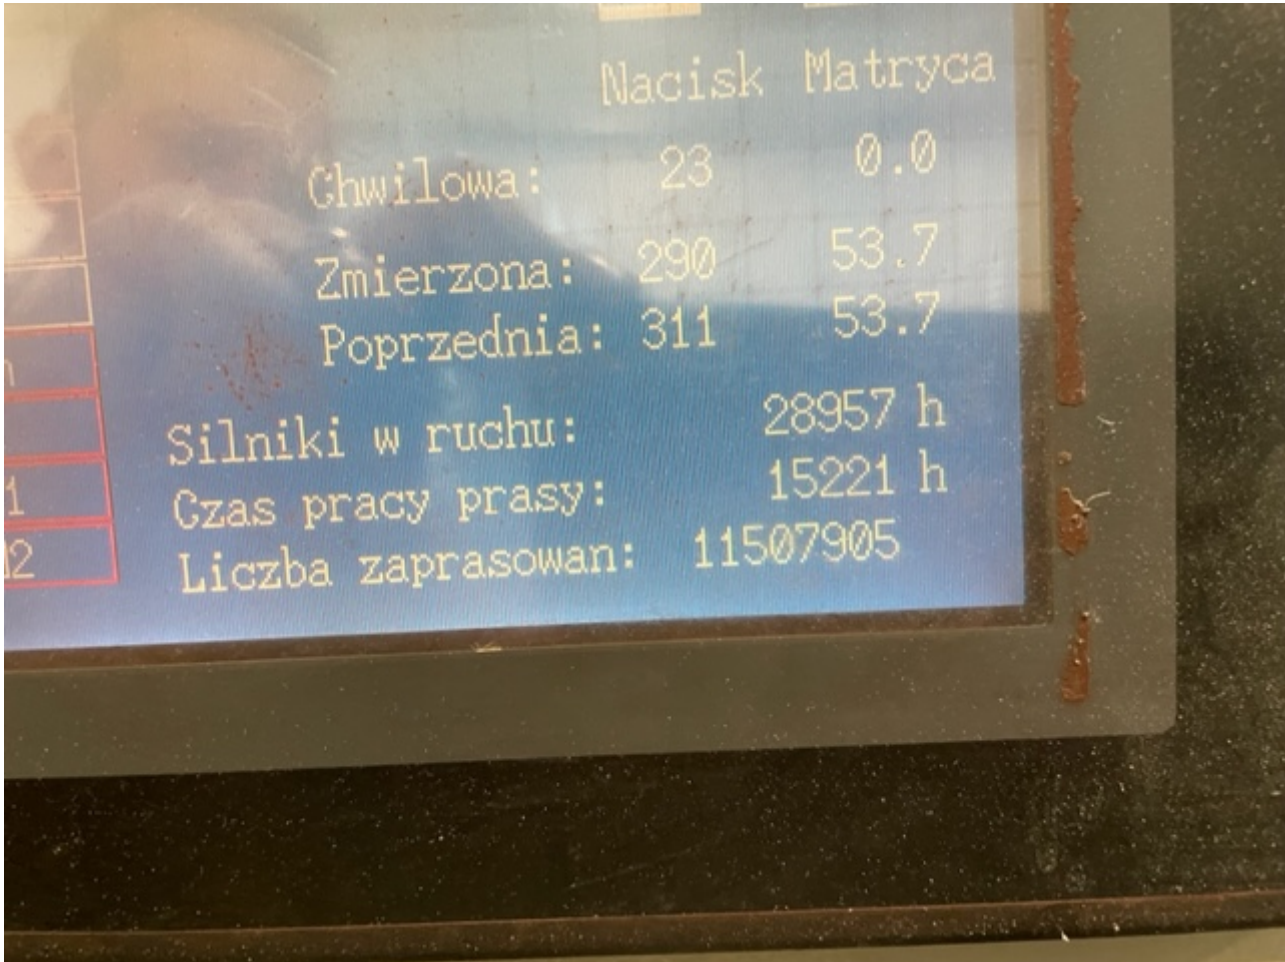

10



11



NE SEGAJ V NEVARNO  
ČRNOČE















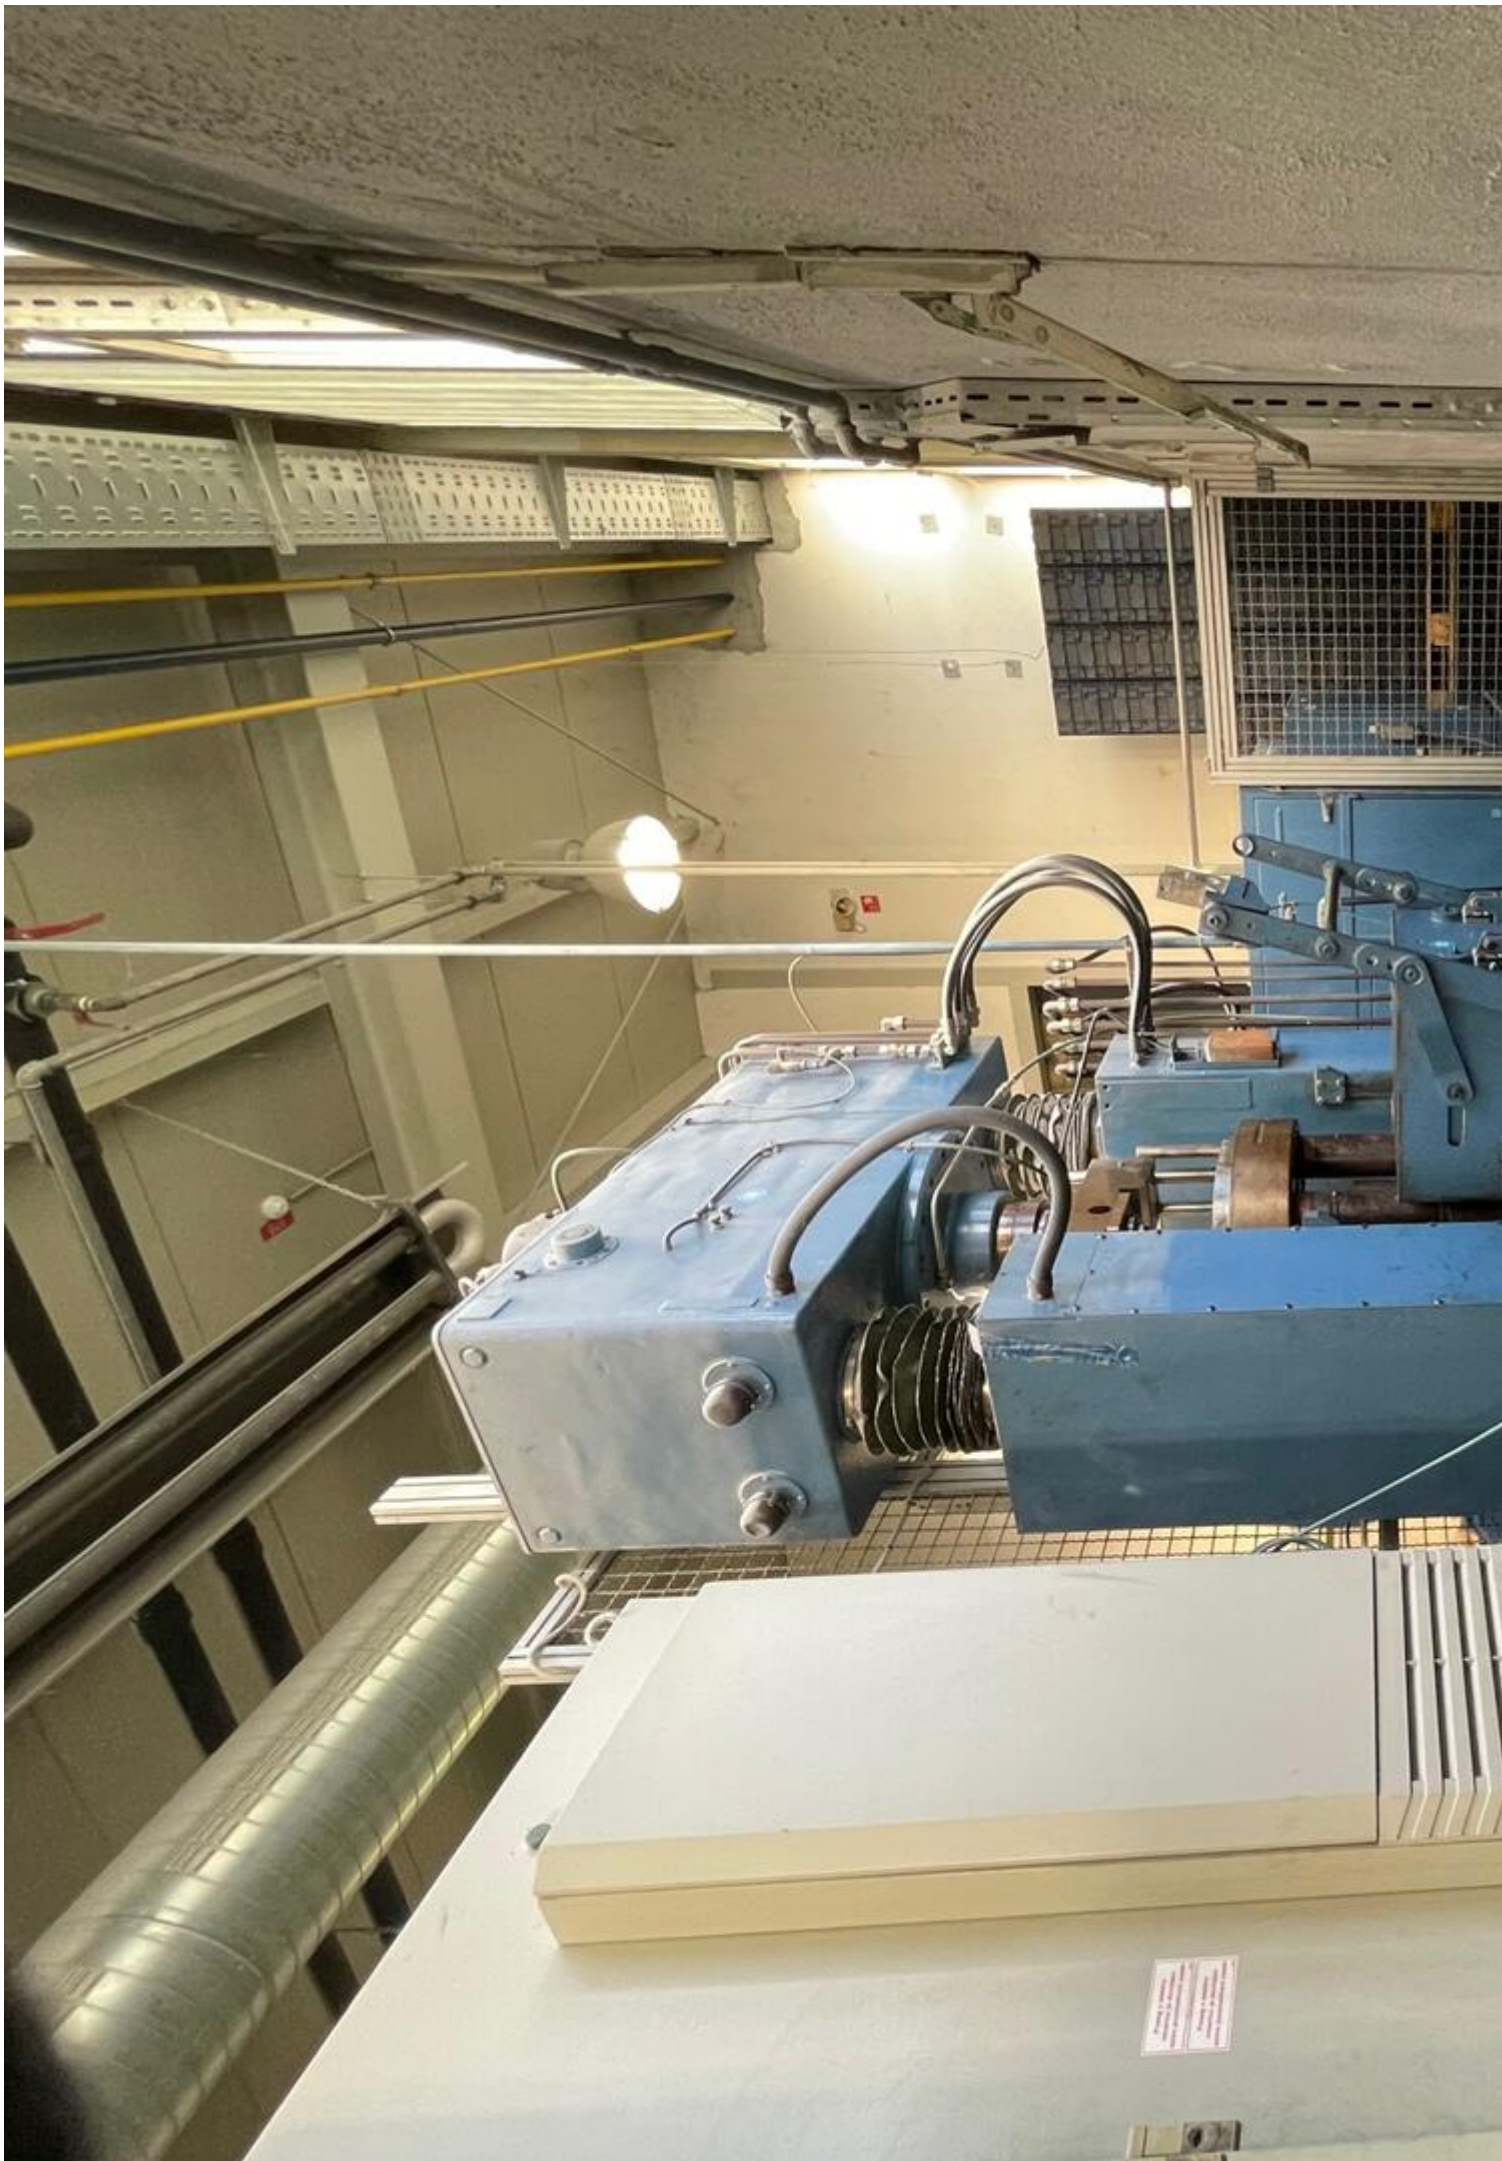



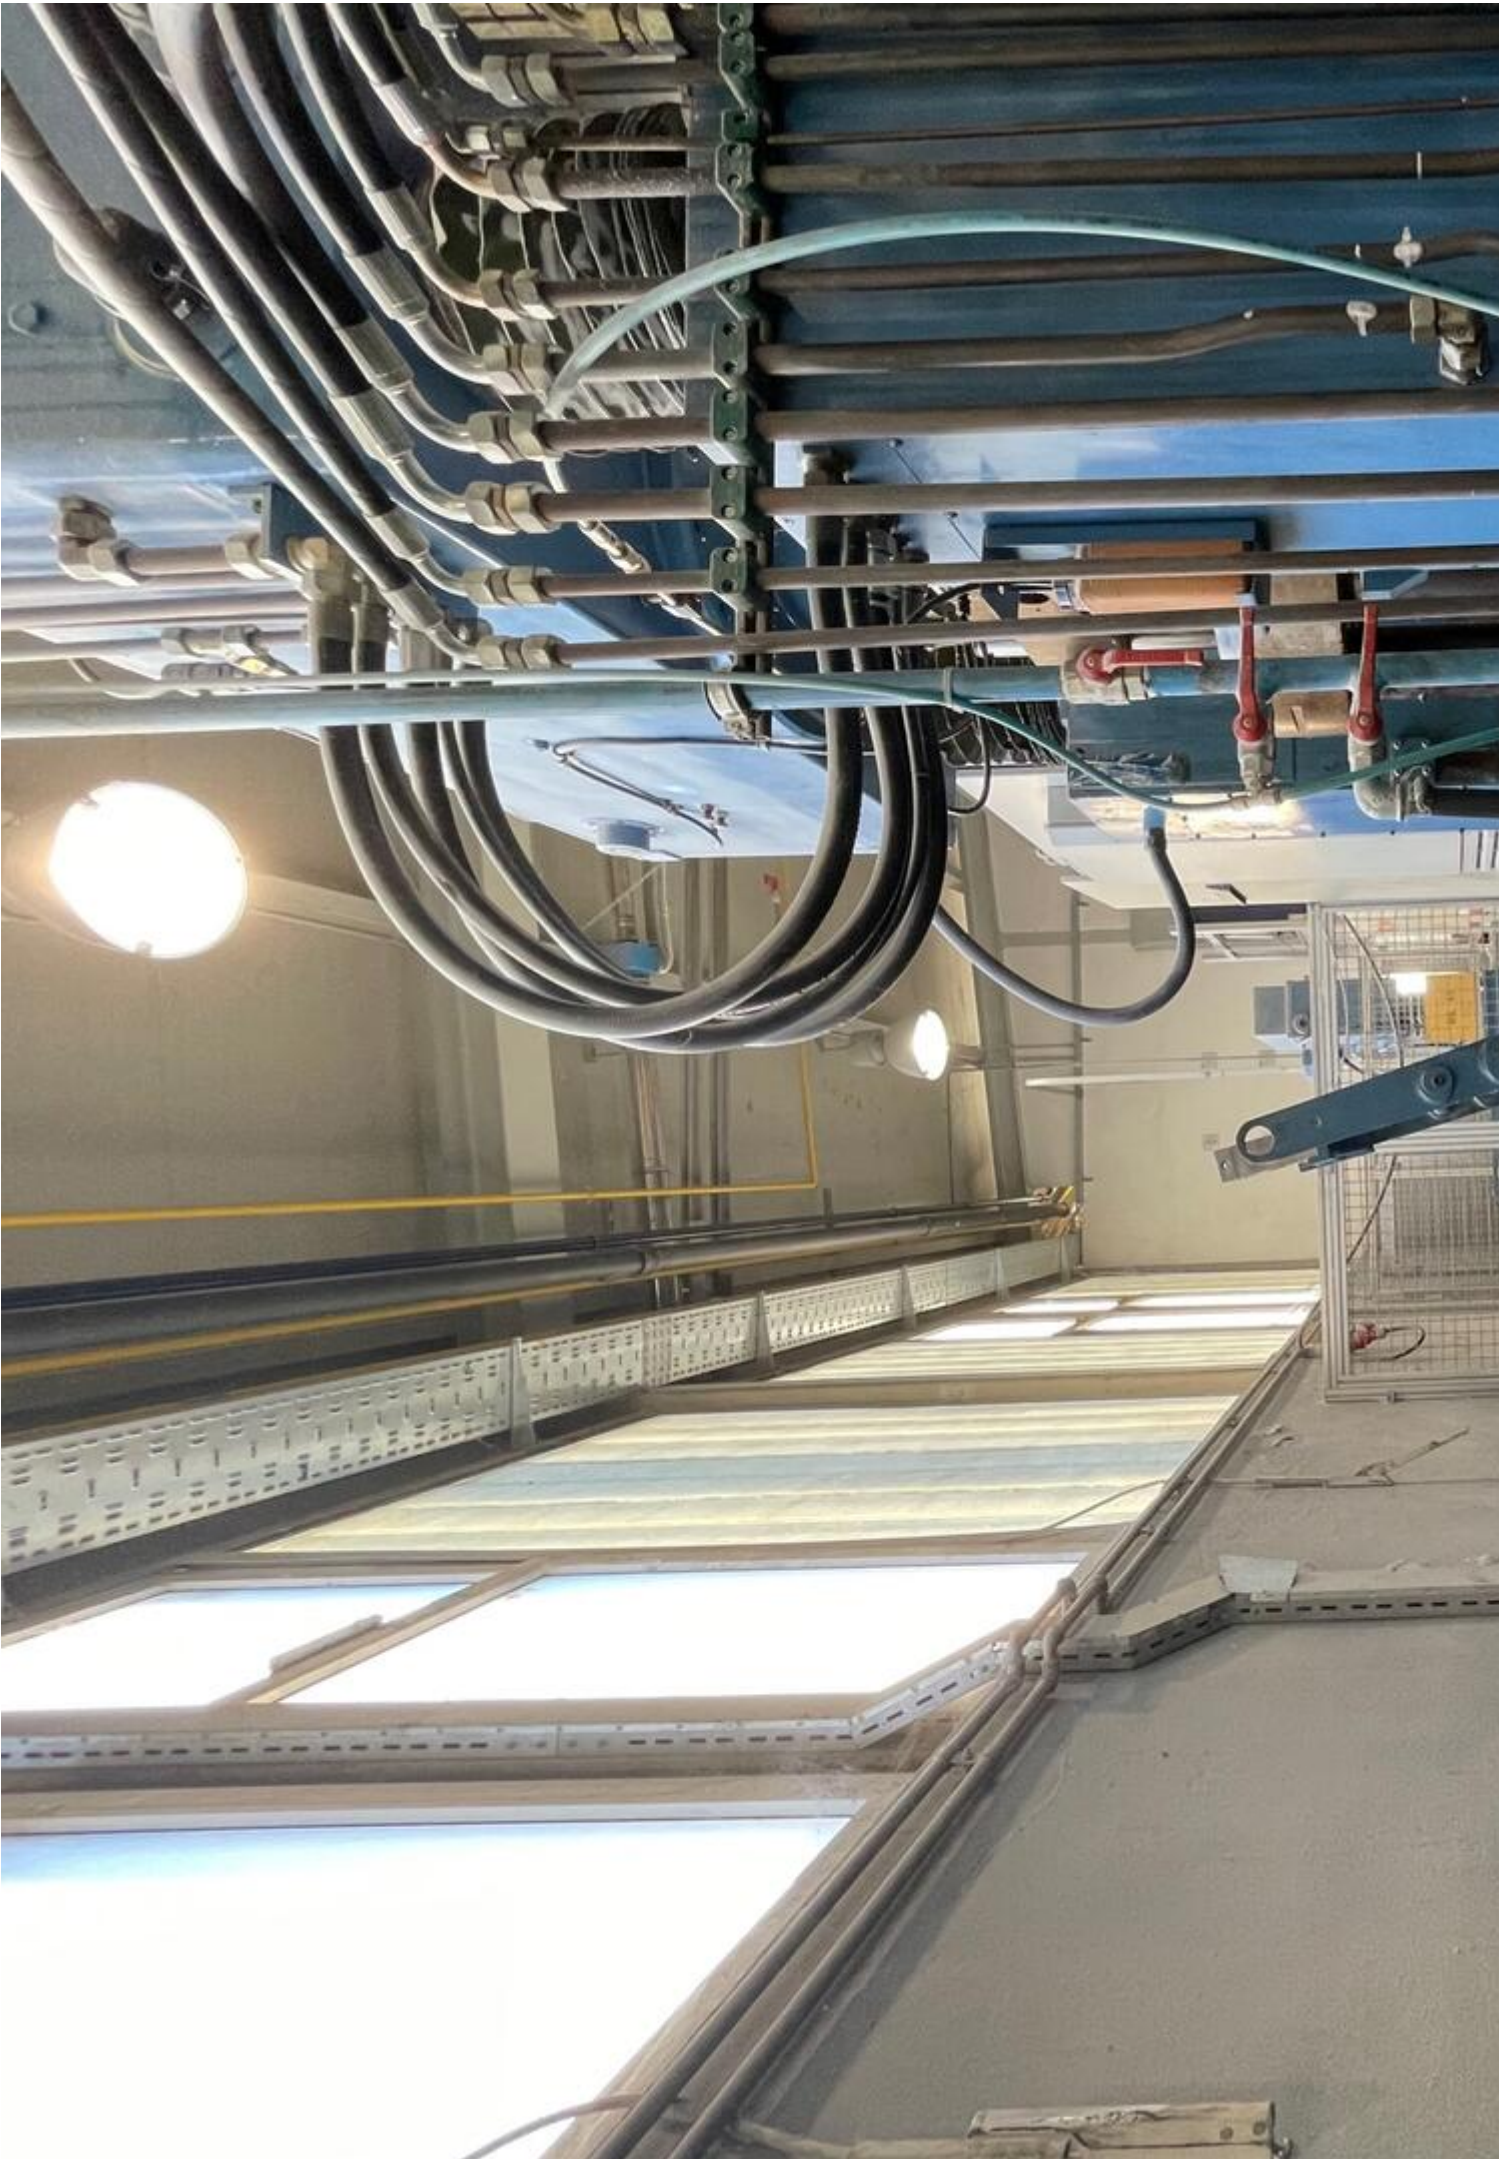

**Video:**



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: [info@asset-trade.de](mailto:info@asset-trade.de)

Web.: <https://www.asset-trade.de/en>

Ref. No.:  
1350-12131222

## **Overview and Technical Data:**

# **DORST DK250 hydraulic press**

**DORST**



**DOO**

**TECHN**

Year of Build:  
Jan 1976  
Rebuild year:

Jan 2009

## **Description:**

# **Used DORST DK 250 Hydraulic Powder Press**

Was fully overhauled in 2009!!!

Operating Hour: 28975 h

## **Technical Data:**

- Sizing force 2,500 kN
- Upper punch stroke 350 mm
- Die stroke 70 mm
- Positioning accuracy  $\pm 0,01$  mm
- Stroke rate up to  $20 \text{ min}^{-1}$

Still in daily operation.

---

Hydraulic CNC sizing press designed for high productivity while maintaining tight tolerances of the sintered part.

Modular design, available for single-level parts or in multi-level design with the possibility of adding various automation solutions and additional functions.

## **Advantages**

- High mechanical and hydraulic rigidity
- Excellent productivity due to quick cycle rates
- Low energy consumption
- Special Intelligent Program Generator IPG to support the sizing process
- Installation at ground level without pit
- Closed-loop controlled die movement
- Small footprint
- Maximum precision
- Ultra-rigid machine frame
- Central force flow
- Up to 2 upper and 2 lower tool levels

The hydraulic powder press DORST DK 250 is an advanced machine designed to achieve high productivity while maintaining the tolerances of sintered parts. Thanks to its modular structure, it can be used for single or multi-level production, to which various automation solutions and additional functions can be added. The press has several features such as high mechanical and hydraulic rigidity, fast rotation speeds, low energy consumption and a special intelligent program generator (IPG) to support the size. In addition, it has small

dimensions, maximum precision, a very rigid machine frame, centralized power flow and up to 2 upper and 2 lower gear levels. The press was completely renovated in 2009 and is still in daily use, working time 28975h. With a design force of 2500 kN, a top of 350 mm, a stroke of 70 mm, a positioning accuracy of  $\pm 0.01$  mm and a travel speed of up to 20 min<sup>-1</sup>, this press is an excellent choice for any industry that wants it. to optimize its production process.

## **Technical Data:**

### **Technical Data:**

Control:

[CNC](#)

Machine Hours:

28975

### **Dimensions and Weight:**

Length:

3.150 mm

Width:

7.100 mm

### **Buyer Information:**

Condition:

[Very good condition](#)

Available:

[Immediately](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[18 %](#)

Location:

Slovenia

### **Images:**













# ST-15



ALUMINUM PRESSURE GAUGE  
SERIAL NO. 30837/175

ALUMINUM PRESSURE GAUGE  
SERIAL NO. 30837/175



● DIE SUPPORT CYLINDERS  
ARE POWERTECHNIA ASS'Y  
1 BAR = 00567 TON  
2 TON = 35 BAR  
4 TON = 71 BAR  
6 TON = 106 BAR  
8 TON = 141 BAR  
10 TON = 176 BAR  
12 TON = 212 BAR  
14 TON = 247 BAR  
16 TON = 282 BAR

● DESIGNED AND MANUFACTURED BY:  
ARMSTRONG LYON HYDRAULICS LTD  
BROCKFIELD DRIVE - ANTREE,  
LIVERPOOL, L9 7EN  
TEL:- 051-521-9556  
FAX:- 051-525-5963  
SERIAL No:- 30837/175


Letting agent  
30837/175

● DIE SUPPORT CYLINDERS  
ARE POWERTECHNIA ASS'Y  
1 BAR = 00567 TON  
2 TON = 35 BAR  
4 TON = 71 BAR  
6 TON = 106 BAR  
8 TON = 141 BAR  
10 TON = 176 BAR  
12 TON = 212 BAR  
14 TON = 247 BAR  
16 TON = 282 BAR




**NE SEGAJ V NEVARNO  
OBMOČJE**

- 1
- 2
- 3
- 4
- 5

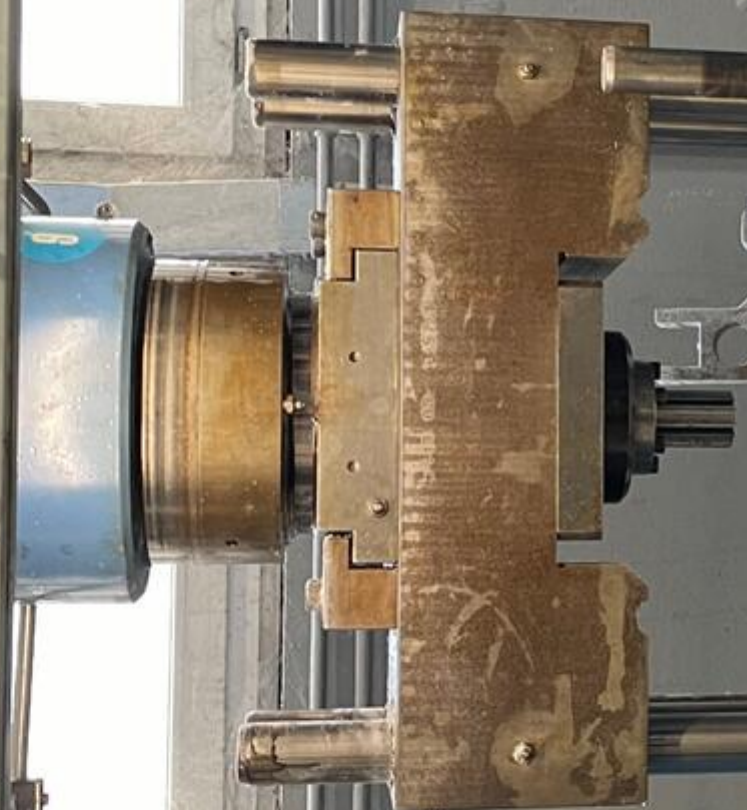



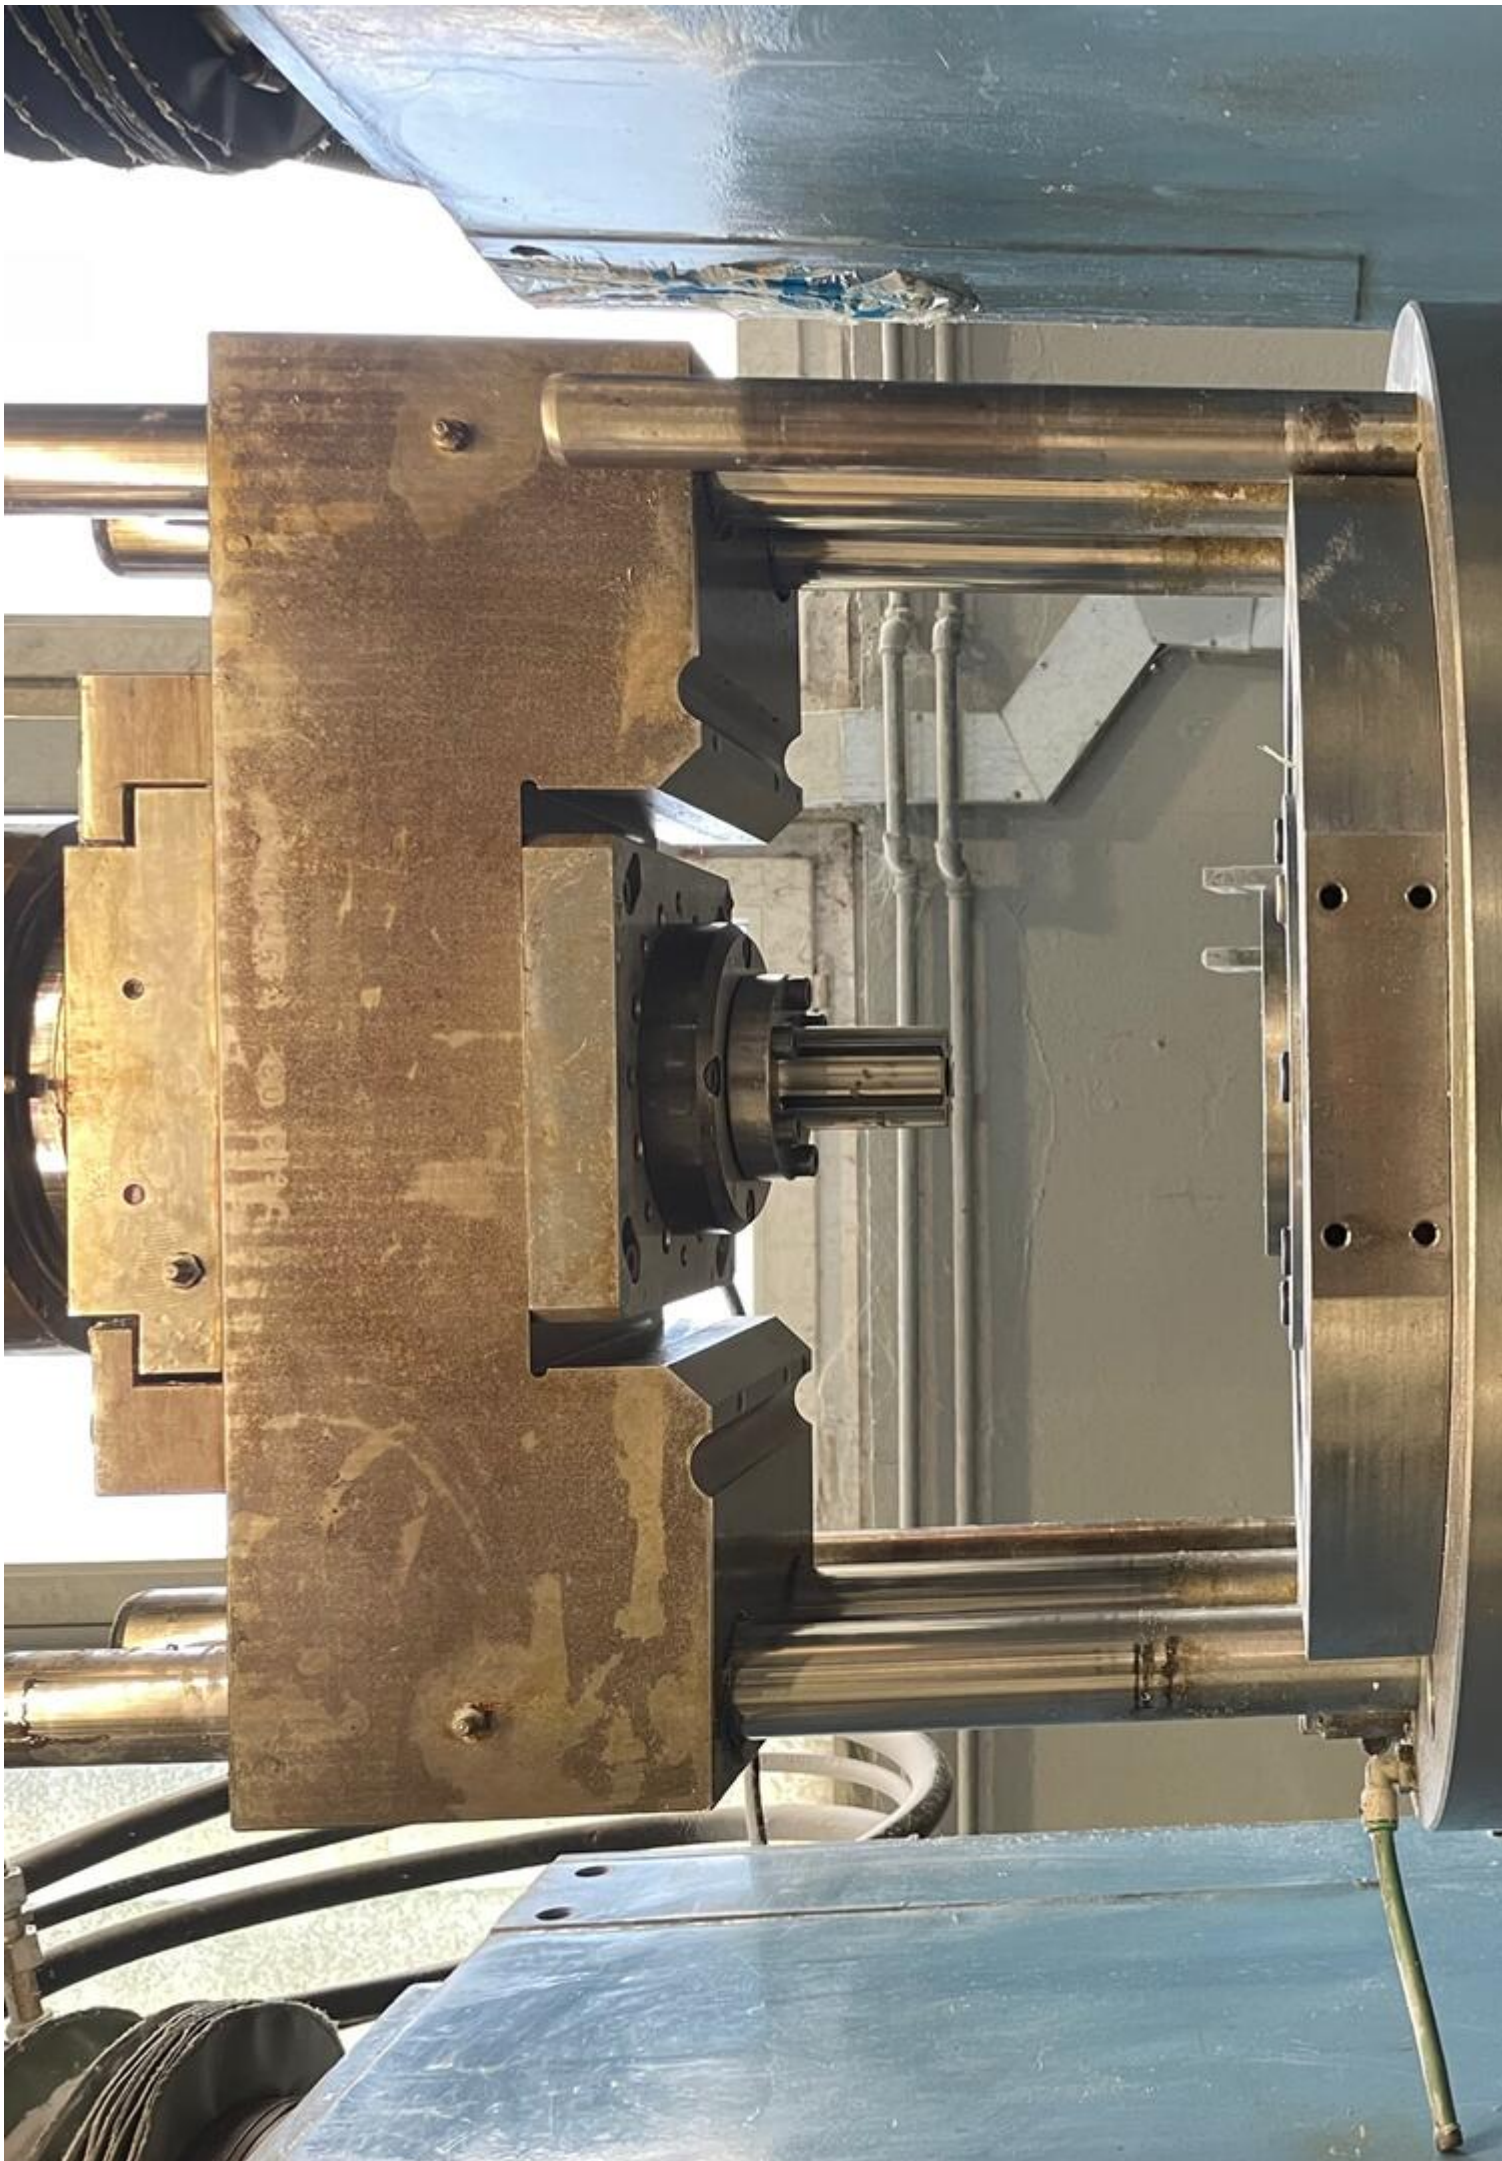









**NE SEGAJ V NEVARNO  
OBMOČJE**

- 1
- 2
- 3
- 4
- 5

Technical documents and safety instructions are displayed in a blue folder on the right side of the cage. The documents include diagrams and text, likely related to the machine's operation and safety protocols.



**PRI ČIŠČENJU ALI POPRAVILU  
STROJA OBVEZNO  
IZKLOPI GLAVNO STIKALO**



Število hodov  
Na minuto



Hitrost +/-  
GI motor



[Levo/Desno]

[Gor/Dol]

[Gor/Dol]

[Levo/Desno]

Start Stop



[GI motor]

Gor Dol



Zgornji izbijec

Alarm

Reset

Reset



[Varnost]



Obrotovanje



Vklop



Varnost



Levo Desno

[GI motor]

[Gor]

[Dol]

[Gor]

[Dol]

[Gor]

[Dol]



[Gor]

Jedro

[Dol]

[Gor]

[Dol]



[Gor]

Izmatac

[Dol]

[Gor]

[Dol]



Vzmetna glava

[Gor]

[Dol]

[Gor]

[Dol]



[Gor]


Ploca

[Dol]

[Gor]

[Dol]

9

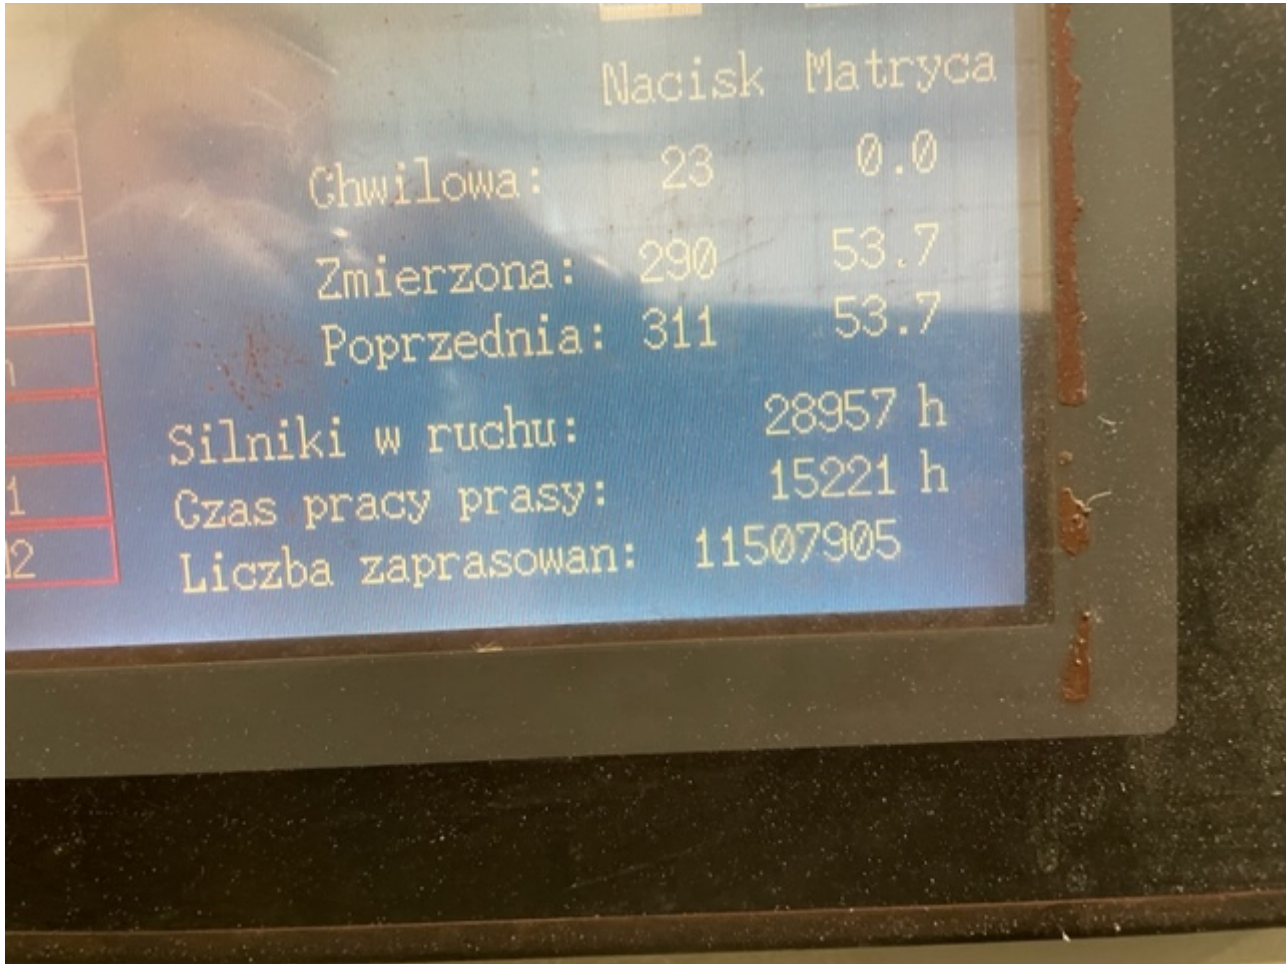

10



11



NE SEGAJ V NEVARNO  
OPREMA JE















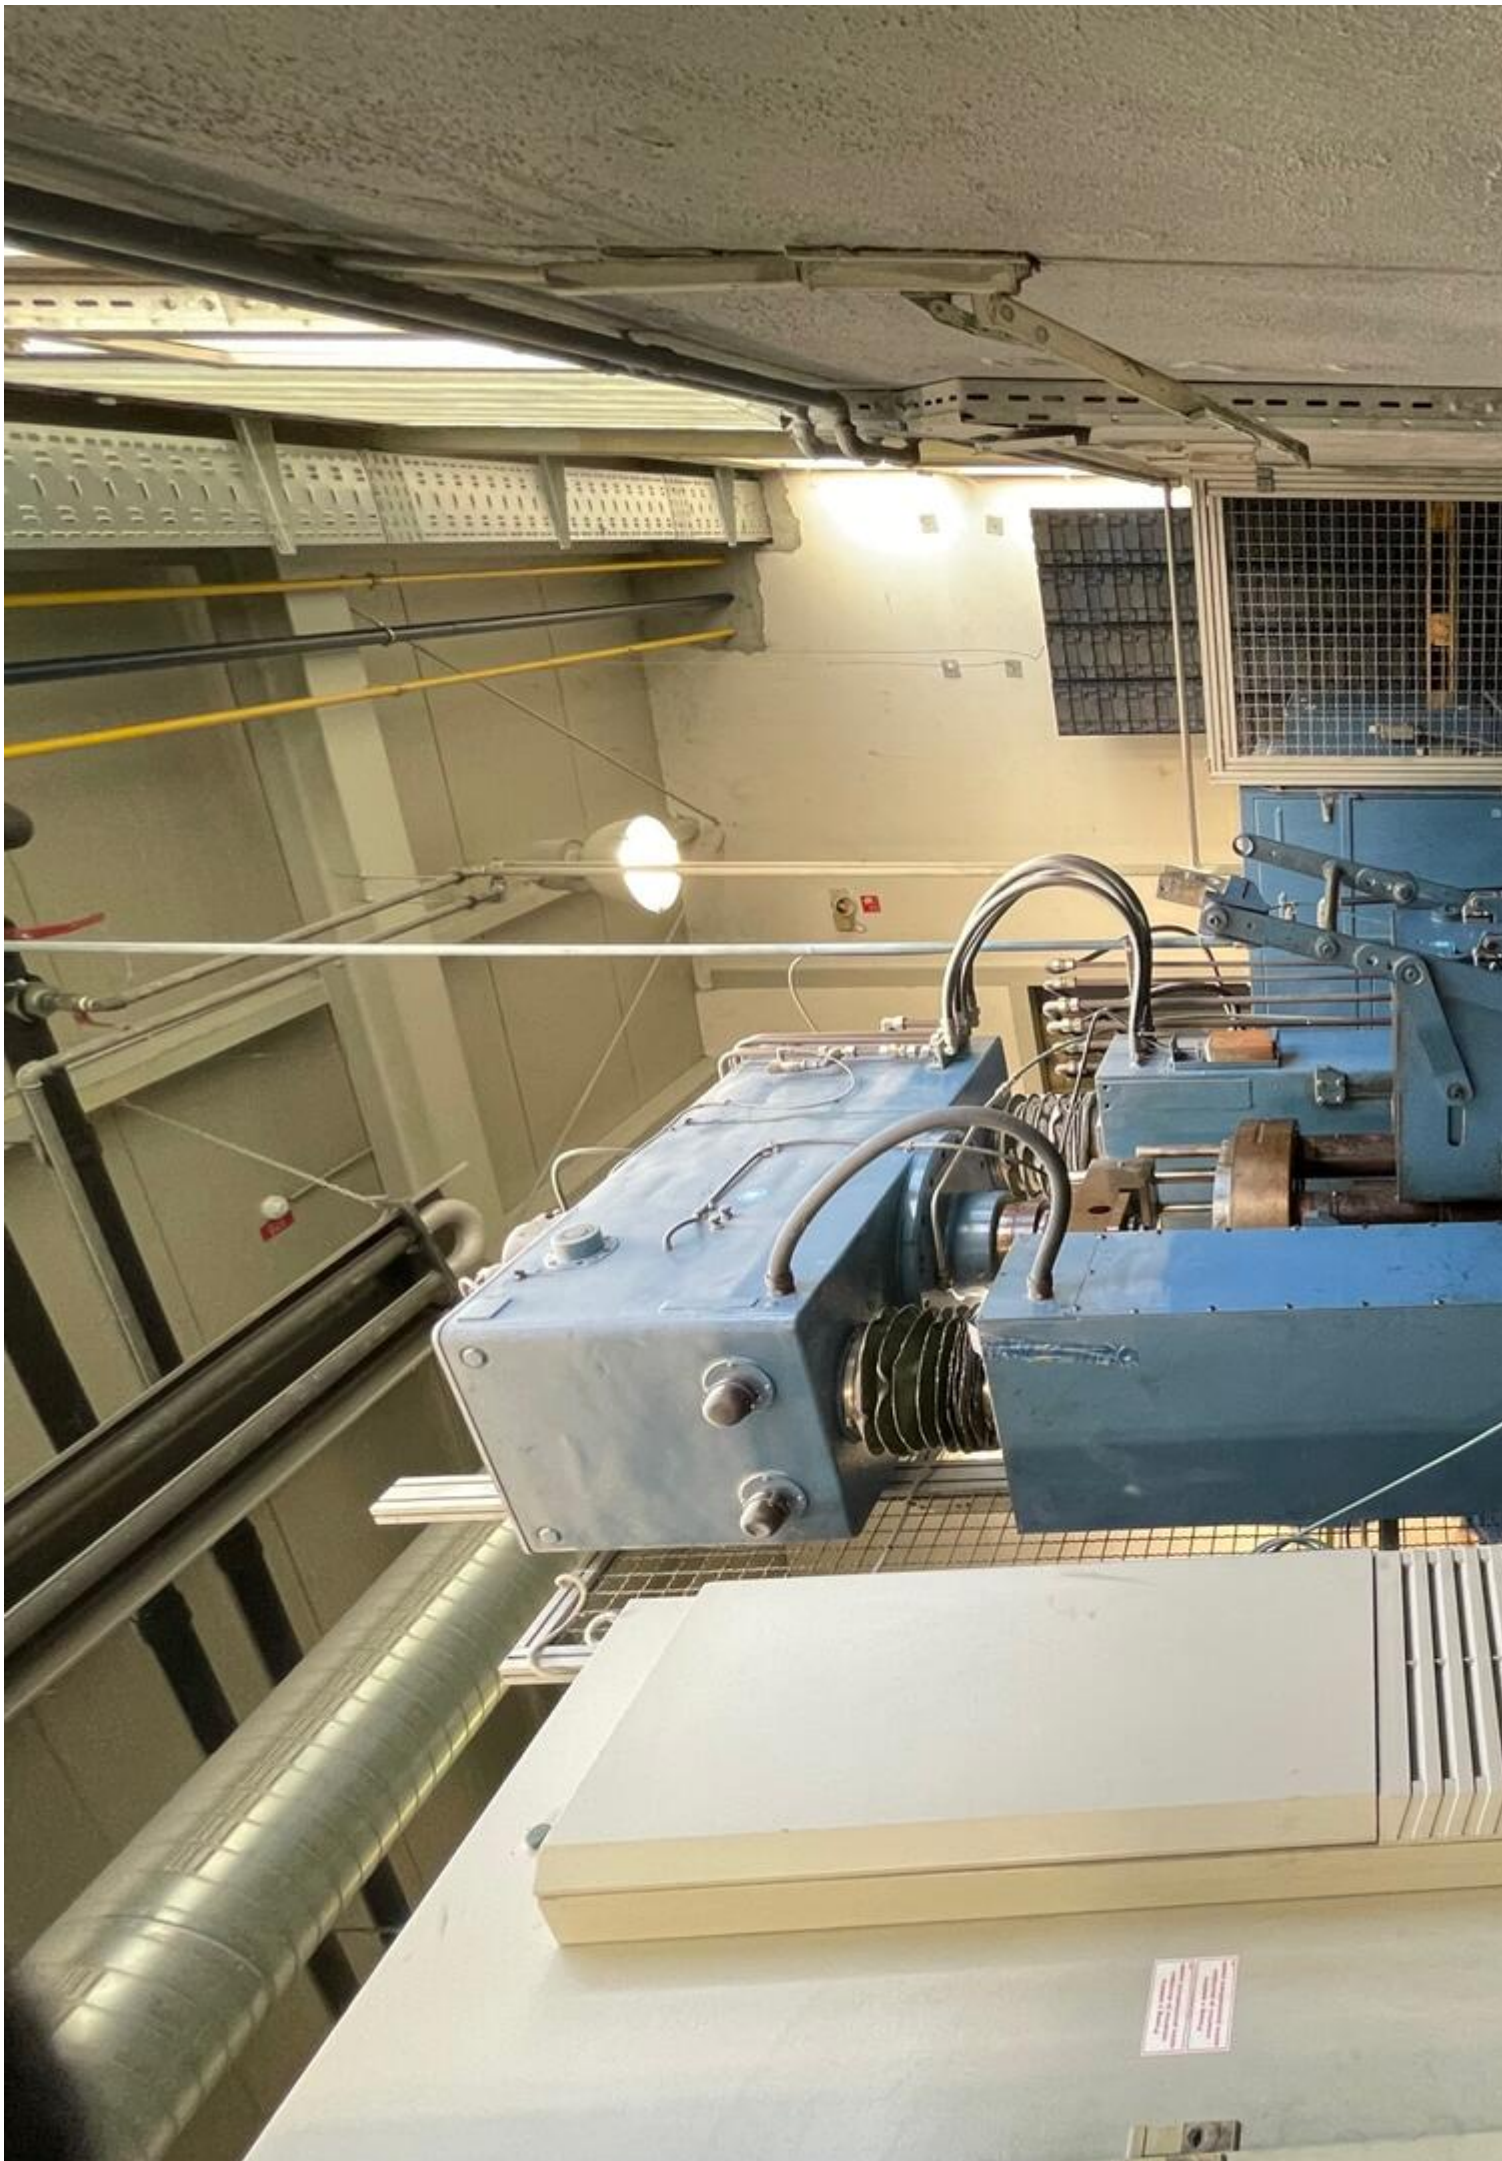



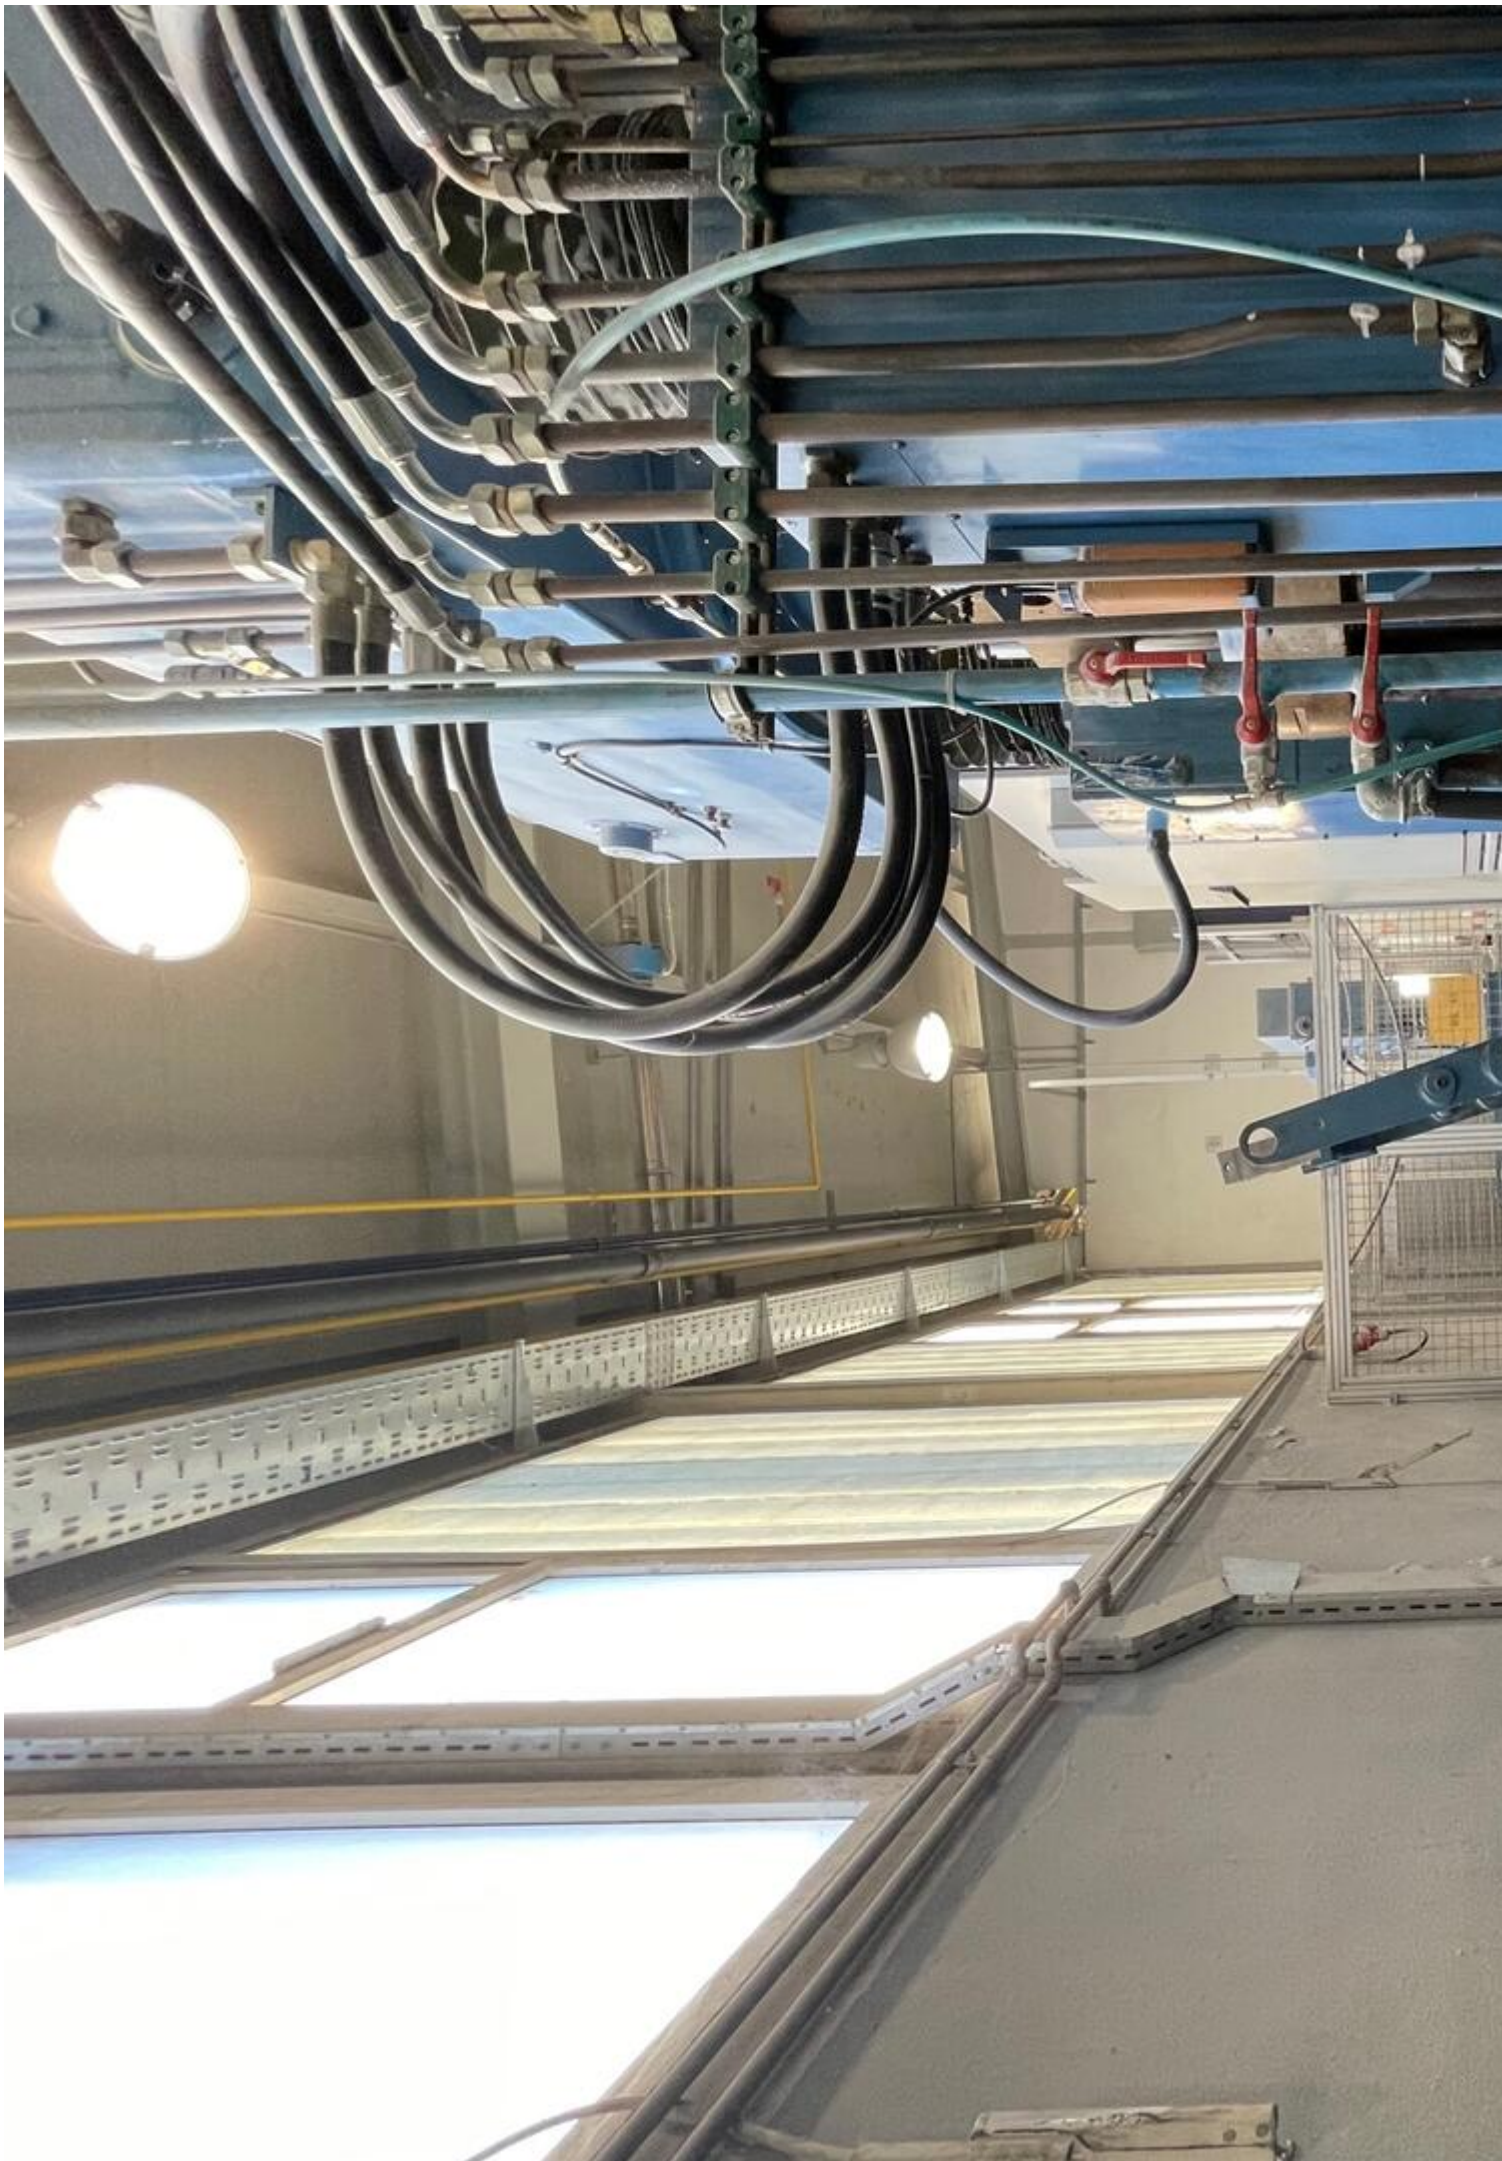

**Video:**



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: [info@asset-trade.de](mailto:info@asset-trade.de)

Web.: <https://www.asset-trade.de/en>

Generated on 18.04.2026

© Copyright 2026 - [Asset-Trade](#)

Page