Asset-Trade
Assessment & Sale of Used Assets

Ref. No.: 1449-11261419



Overview and Technical Data:

Used TRAUB TNA 500 CNC Lathe for Sale

TRAUB

INDEX

TRAUB

Year of Build: Jan 1996

© Copyright 2026 - Asset-Trade

© Copyright 2026 - Asset-Trade

Description:

Used TRAUB TNA 500 CNC Lathe for Sale

CNC Controls Traub System TX8F

Technical Data;

- Main spindle
  - Turning length: 1000 mm
  - Chuck diameter; 250 / 315 mm
  - Spindle passage (max. bar diameter); 80 mm
  - Connected load: 42 kW
- Main drive
  - Speed range up to; 2800 rpm
  - Max. torque; 545 Nm

© Copyright 2026 - Asset-Trade

Technical Data:

Technical Data:

Control: CNC TX8F
Machine Hours: 85018.00 hrs.
Spindle Hours: 32339.00 hrs.
Turning lenght: 1000.00 mm
Turning diameter: 315.00 mm
Spindle Speed: 2800.00 rpm
Driven Tools: 12.00
Tool Capacity: 12 x
Tailstock: Yes
Bezel: Yes

Dimensions and Weight:

Height: 2147 mm
Length: 5500 mm
Width: 2287 mm
Weight: 6800 kg

Buyer Information:

Condition: Very good condition
Available: Sold
Sold as:
EXW (Ex Works - Incoterm)
VAT: 19 %
Buyers Premium: 18 %
Location: Germany

© Copyright 2026 - Asset-Trade

Images:







4

© Copyright 2026 - Asset-Trade



5










8

7


© Copyright 2026 - Asset-Trade

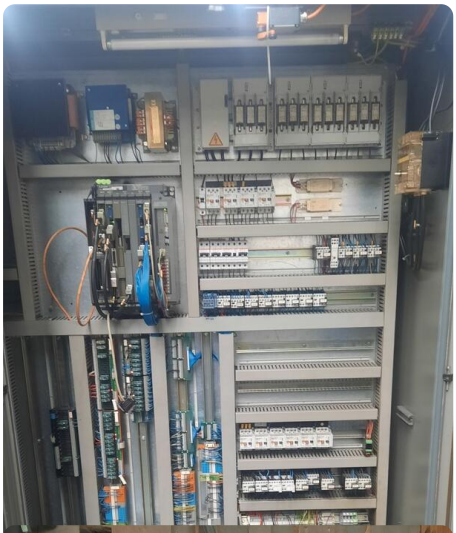


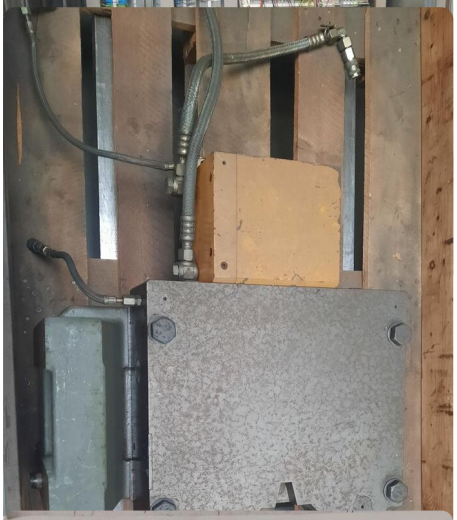

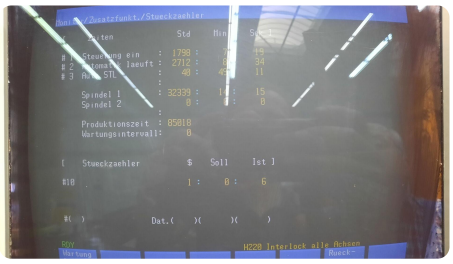

10

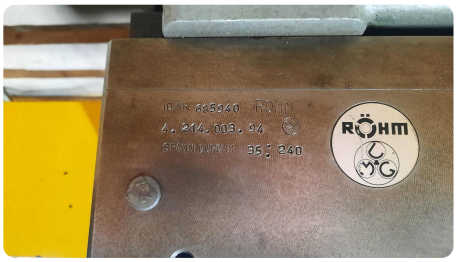

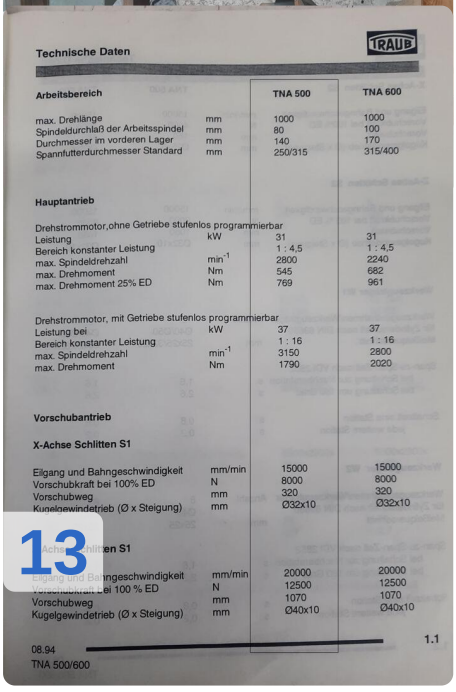

Technische Daten

TRAUB

Arbeitsbereich		TNA 500	TNA 600
max. Drehlänge	mm	1000	1000
Spindeldurchlaß der Arbeitsspindel	mm	80	100
Durchmesser im vorderen Lager	mm	140	170
Spannfutterdurchmesser Standard	mm	250/315	315/400
Hauptantrieb			
Drehstrommotor,ohne Getriebe stufenlos programmierbar			
Leistung	kW	31	31
Bereich konstanter Leistung		1 : 4,5	1 : 4,5
max. Spindeldrehzahl	min^{-1}	2800	2240
max. Drehmoment	Nm	545	682
max. Drehmoment 25% ED	Nm	769	961
Drehstrommotor, mit Getriebe stufenlos programmierbar			
Leistung bei	kW	37	37
Bereich konstanter Leistung		1 : 16	1 : 16
max. Spindeldrehzahl	min^{-1}	3150	2800
max. Drehmoment	Nm	1790	2020
Vorschubantrieb			
X-Achse Schlitten S1			
Eilgang und Bahngeschwindigkeit	mm/min	15000	15000
Vorschubkraft bei 100% ED	N	8000	8000
Vorschubweg	mm	320	320
Kugelgewindetrieb (Ø x Steigung)	mm	Ø32x10	Ø32x10
Z-Achse Schlitten S1			
Eilgang und Bahngeschwindigkeit	mm/min	20000	20000
Vorschubkraft bei 100 % ED	N	12500	12500
Vorschubweg	mm	1070	1070
Kugelgewindetrieb (Ø x Steigung)	mm	Ø40x10	Ø40x10

08.94
TNA 500/600
1.1

13





14

© Copyright 2026 - Asset-Trade



© Copyright 2026 - Asset-Trade

© Copyright 2026 - Asset-Trade

Asset-Trade

Assessment & Sale of Used Assets

QR Code for https://www.asset-trade.de/en/print/pdf/node/7766

Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: https://www.asset-trade.de/en