

Image not found or type unknown



Ref. No.:

1452-12181925

Overview and Technical Data:

3x Used TOYODA FH 500j Horizontal Machine Center for Sale

TOYODA



Year of Build:

Description:

Buy 3x used TOYODA FH 500j horizontal machining centers - High precision and efficiency

Are you looking for high-quality used horizontal machining centers? The used TOYODA FH 500j are ideal for precise machining and versatile applications in various industries. These TOYODA FH 500j horizontal machining centers offer exceptional performance and reliability for your manufacturing needs.

CNC control: Fanuc 32i for precise control and efficient machining.

Technical Data of FH500J Horizontal Machining Center

- **Dimensions of Tool Holder:** 500 mm
- **Rotary Table Positioning Angle:** 0.001°
- **Table Height (Palette):** 1100 mm
- **Travel Ranges:**
 - X-Axis: 730 mm
 - Y-Axis: 730 mm
 - Z-Axis: 850 mm
 - Distance (Spindle Tip to Table Center): 100–950 mm
 - Distance (Spindle Axis to Top of Work Holder): 50–780 mm
- **Feed Rates:**
 - Rapid Traverse (X, Y, Z): 60 m/min
 - Rapid Traverse (B-Axis): 14400°/min
 - Cutting Feed (X, Y, Z): 0.001–30 m/min
- **Spindle for different machining requirements:**
 - Speed Range: 50–15000 RPM
 - Diameter (Inner of Front Bearing): 80 mm
 - Spindle Nose Taper: ISO R297, Taper #40
- **Tool System:**
 - Number of Tools: 60
 - Tool Dimensions: Ø75 × 470 mm
 - Maximum Tool Weight: 8 kg
 - Tool Change Time: 0.9 sec (Tool-to-Tool)
- **Motors:**
 - Spindle Motor: 22/18.5 kW (15 min/Continuous Operation)
 - Hydraulic Pump Motor: 2.2 kW (4 HP)
- **Machine Size and Weight:**
 - Floor Area: 2330 × 4530 mm
 - Machine Weight: 13500 kg
- **Fluid and Air Requirements:**
 - Operating Oil: 18 L
 - Spindle Cooling Oil: 15 L
 - Compressed Air: 800 NL/min (0.4–0.5 MPa)
- **Electrical Connection:** 51 kVA
- **Precision:**
 - Positioning Accuracy: ±0.003 mm

- Repeatability: ± 0.0015 mm
- **Maximum Load:** 500 kg on the work table.

Advantages of the FH500J Horizontal Machining Center

- **High Precision and Reliability**
 - Exceptional positioning accuracy of ± 0.003 mm and repeatability of ± 0.0015 mm ensures precise machining even for complex parts.
 - Durable construction supports a long service life with minimal downtime.
- **Versatile Machining Capabilities**
 - Supports high-speed spindle operations with a range of 50–15,000 RPM, suitable for cutting, drilling, and finishing various materials.
 - Wide tool capacity of 60 tools enhances flexibility for multi-operation jobs.
- **Efficiency and Productivity**
 - Rapid traverse speeds of 60 m/min (X, Y, Z) and a fast tool change time of 0.9 seconds reduce cycle times.
 - The robust table load capacity (up to 500 kg) accommodates large or heavy workpieces.
- **Compact and Space-Saving Design**
 - With a footprint of 2330×4530 mm, the machine fits efficiently in most manufacturing spaces while maintaining excellent functionality.
- **Advanced Motor Performance**
 - A high-powered spindle motor (22/18.5 kW) ensures smooth and powerful machining, even on tough materials.
 - High-speed rotary B-axis ($14,400^\circ/\text{min}$) enables complex angular machining and 4-axis work.
- **Ease of Maintenance**
 - Optimized oil and air systems, with clear sight glasses and maintenance indicators, simplify daily checks.
 - Built-in cooling systems for spindle and control ensure stable operation during long production runs.
- **Flexible Tooling and Standards Compliance**
 - Tool holders comply with JIS BT40 standards, ensuring compatibility with a wide range of tooling options.
 - Meets various safety and operational standards for global export and deployment.

Typical Usage Scenarios for the FH500J Machine

- **Automotive Industry**
 - Ideal for machining complex engine components, gear housings, and other critical automotive parts with high precision.
- **Aerospace Sector**
 - Suited for creating lightweight yet robust parts such as brackets, frames, and connectors with tight tolerances.
- **Industrial Equipment Manufacturing**
 - Supports the production of heavy-duty components like hydraulic pumps, motor housings, and gear assemblies.
- **Tool and Die Making**
 - Facilitates the manufacturing of molds, dies, and tooling equipment requiring intricate designs and surface finishes.

- **General Engineering**

- Useful in workshops that cater to custom or batch production of machined parts for various industries.

- **Medical Device Manufacturing**

- Provides the precision needed for creating surgical tools, implants, and diagnostic equipment components.

Why buy a TOYODA FH 500j horizontal machining center?

The used TOYODA FH 500j offers excellent performance and precision for all types of machining projects. Whether you are looking for used horizontal machining centers in Germany or starting a new project, this used horizontal machining center is a reliable and cost-effective solution for your production needs.

Optimize your production with a used TOYODA FH 500j horizontal machining centre from our industrial machinery dealers. Take the opportunity to increase your efficiency with a durable and powerful horizontal machining center.

Technical Data:

Technical Data:

Control:

Series 32i

Machine Hours:

92.450 hrs.

Spindle Speed:

15.000 rpm

Tool Holder:

SK40

Tool Capacity:

60 x

Travels:

X-Axis:

730 mm

Y-Axis:

730mm

Z-Axis:

850 mm

Dimensions and Weight:

Width:

4.530 mm

Length:

2.330 mm

Weight:

13.500 kg

Buyer Information:

Condition:

Very good condition

Availability:

Sold

Sold as:

EXW (Ex Works - Incoterm)

VAT:

19 %


Buyers Premium:

18 %

Location:

Germany


Images:

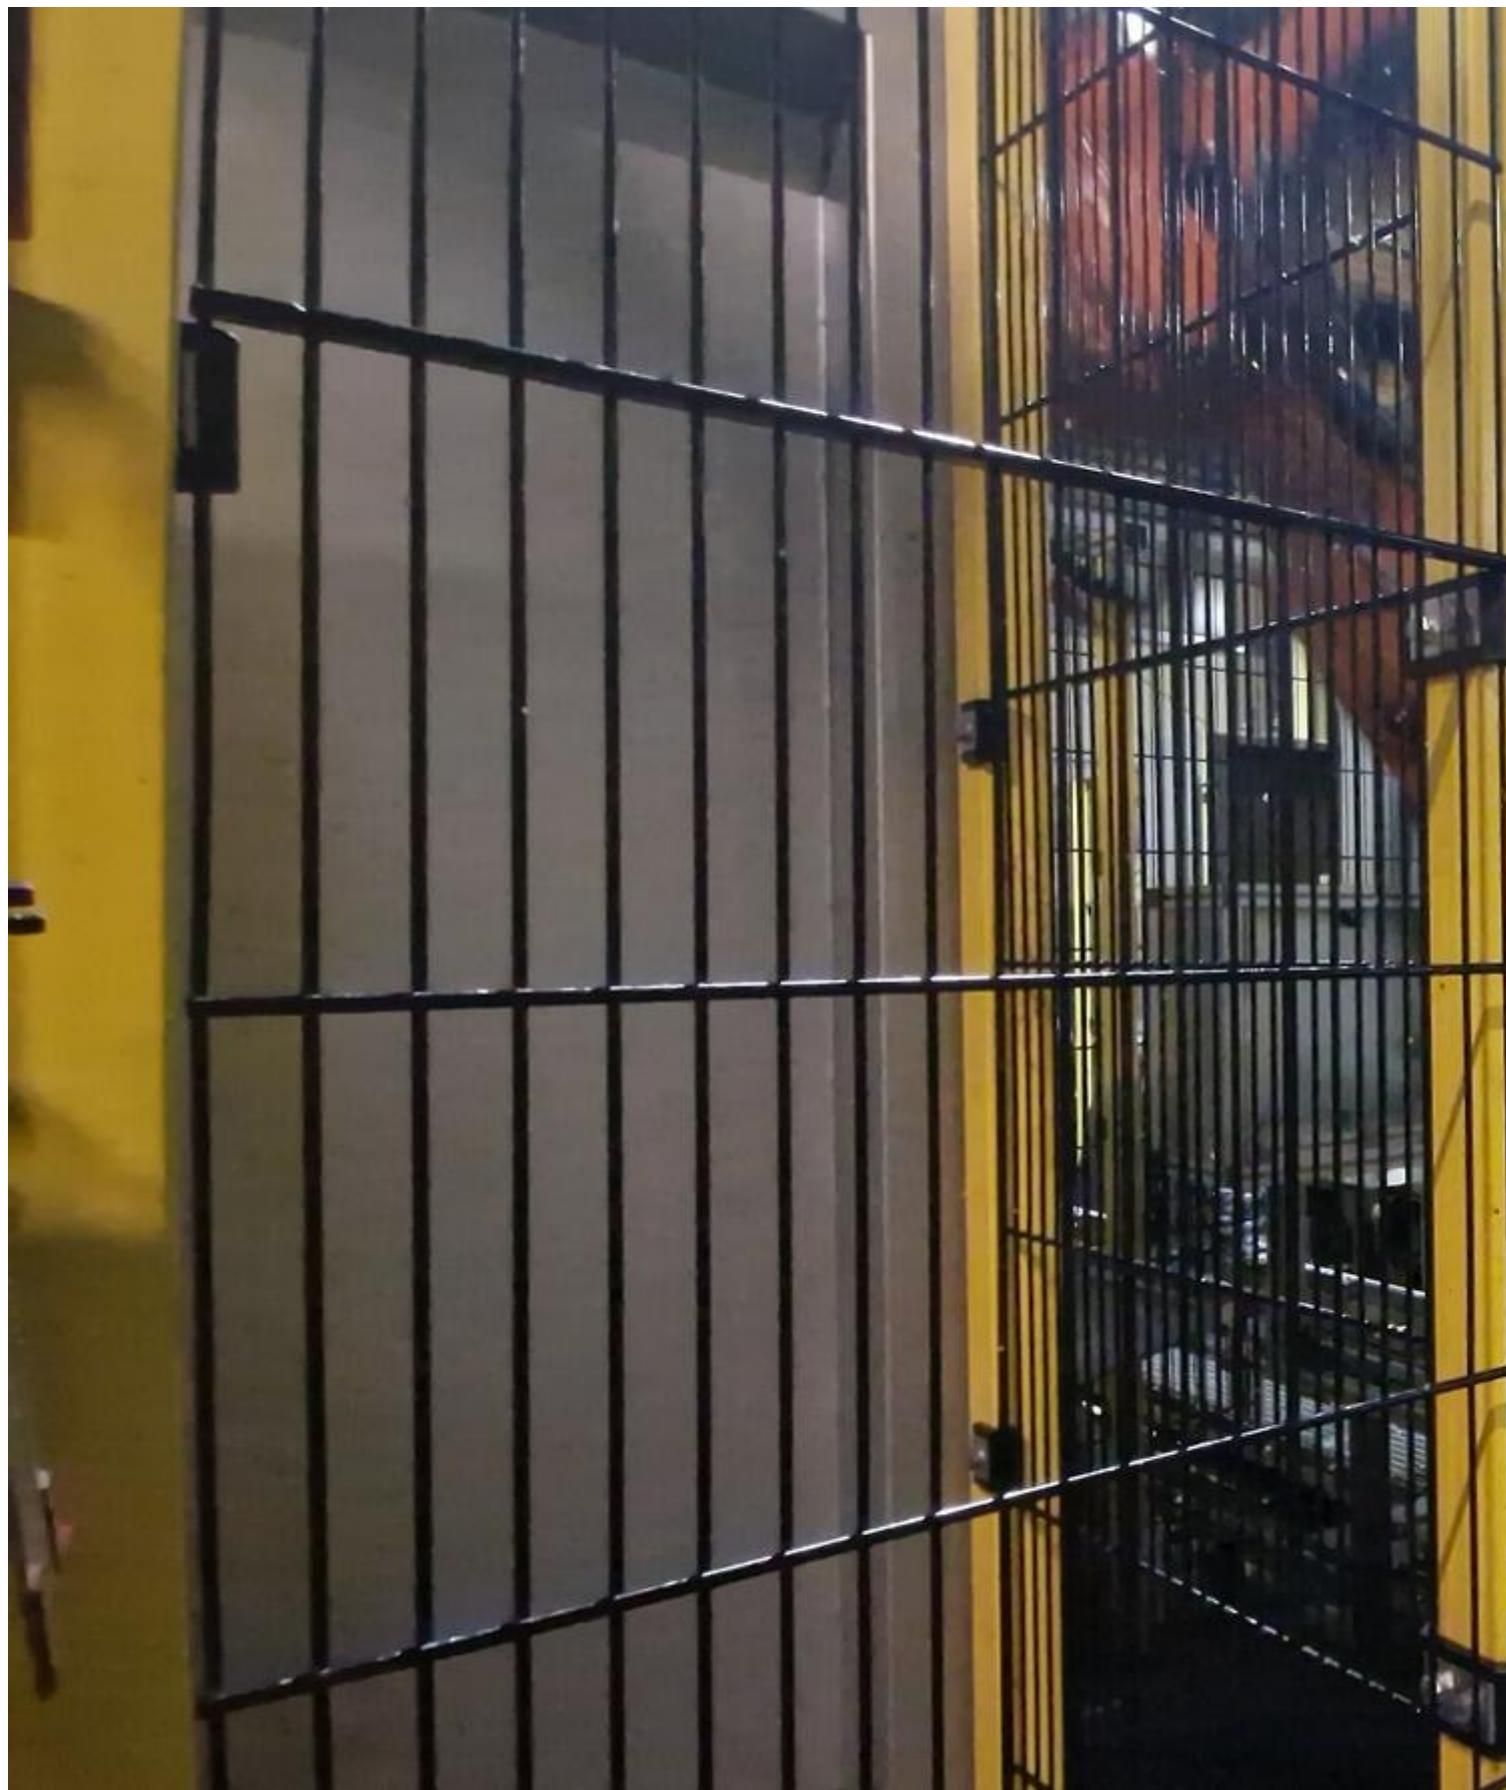







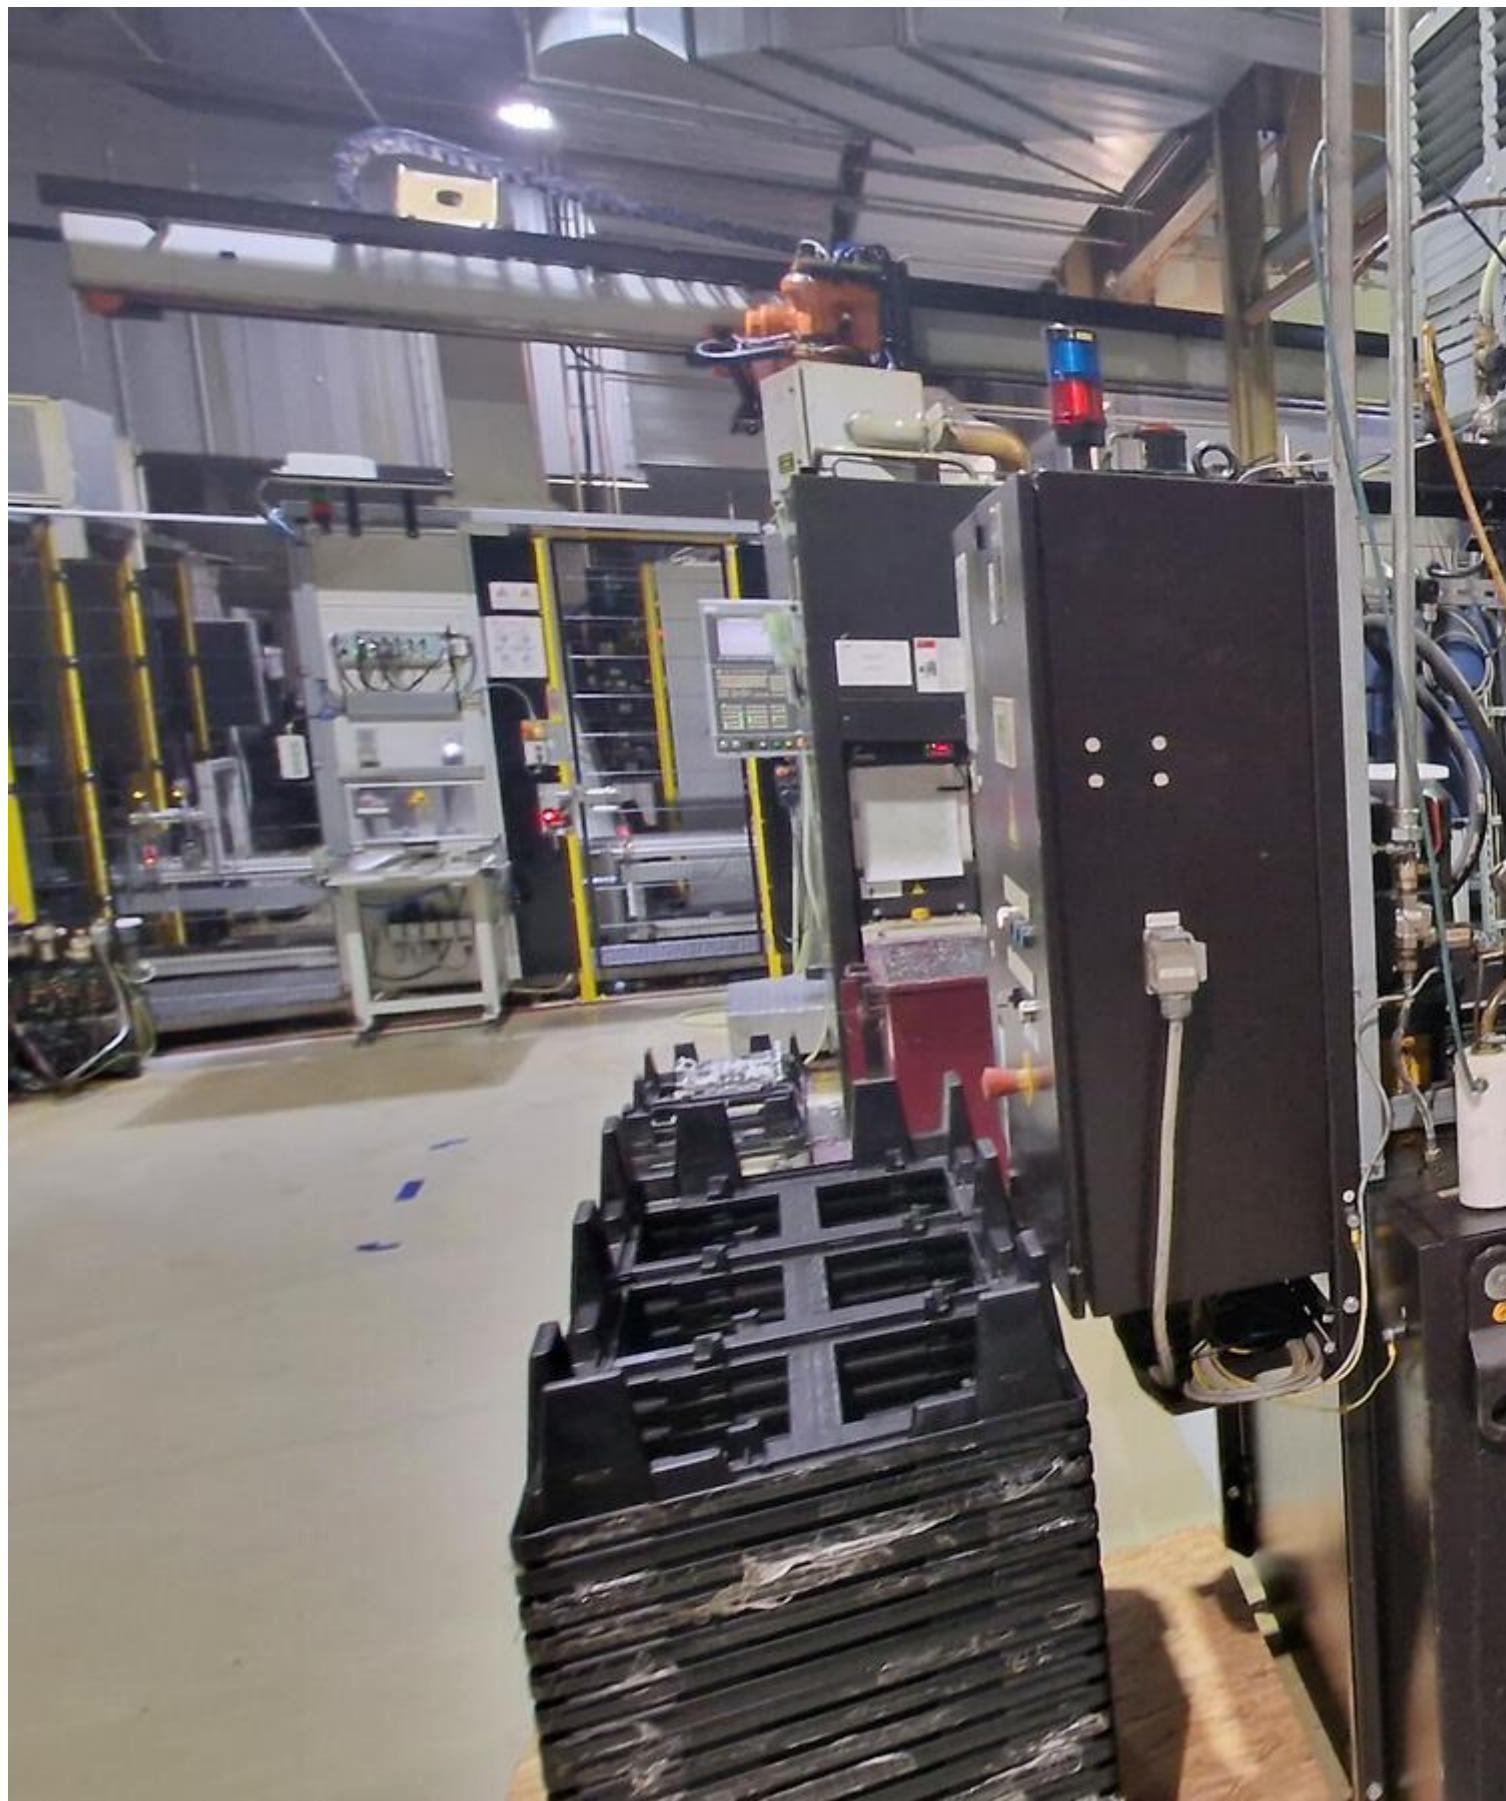











10



11







Werkzeuge und W...
sich automatisch...
Kann zu Schnitt- und Quetsch...
sogar zum Tode führen.

Diesen Bereich nicht betreten.
Sicherheitsbestimmungen
Maschine ausschalten, wenn
Bereich gearbeitet wird.

The machine will move...
without warning and...
cause severe crushing inju...
Do not enter this area unless...
Isolate power when working...

Les outils dans l'...
mettre en mouvement...
avertissement.

Les outils peuvent engendrer...
blessures.

Ne pas pénétrer dans cette...
s'assurer de l'absence de...
Couper puissance en cas...
cette zone.

Gli utensili e i pezzi...
quest'area possono...
movimento automaticamente...
preavviso.

Ciò può causare gravi lesioni.
Accedere a quest'area è pericoloso.

Disinnescare l'alimentazione...
lavora in quest'area.


Elementos del...
moverse inesperadamente...
producir en consecuencia...
incluso la muerte.

No entran en esta zona...
puedan hacer con total...
Disconnecten la corriente...
trabajen en esta zona.







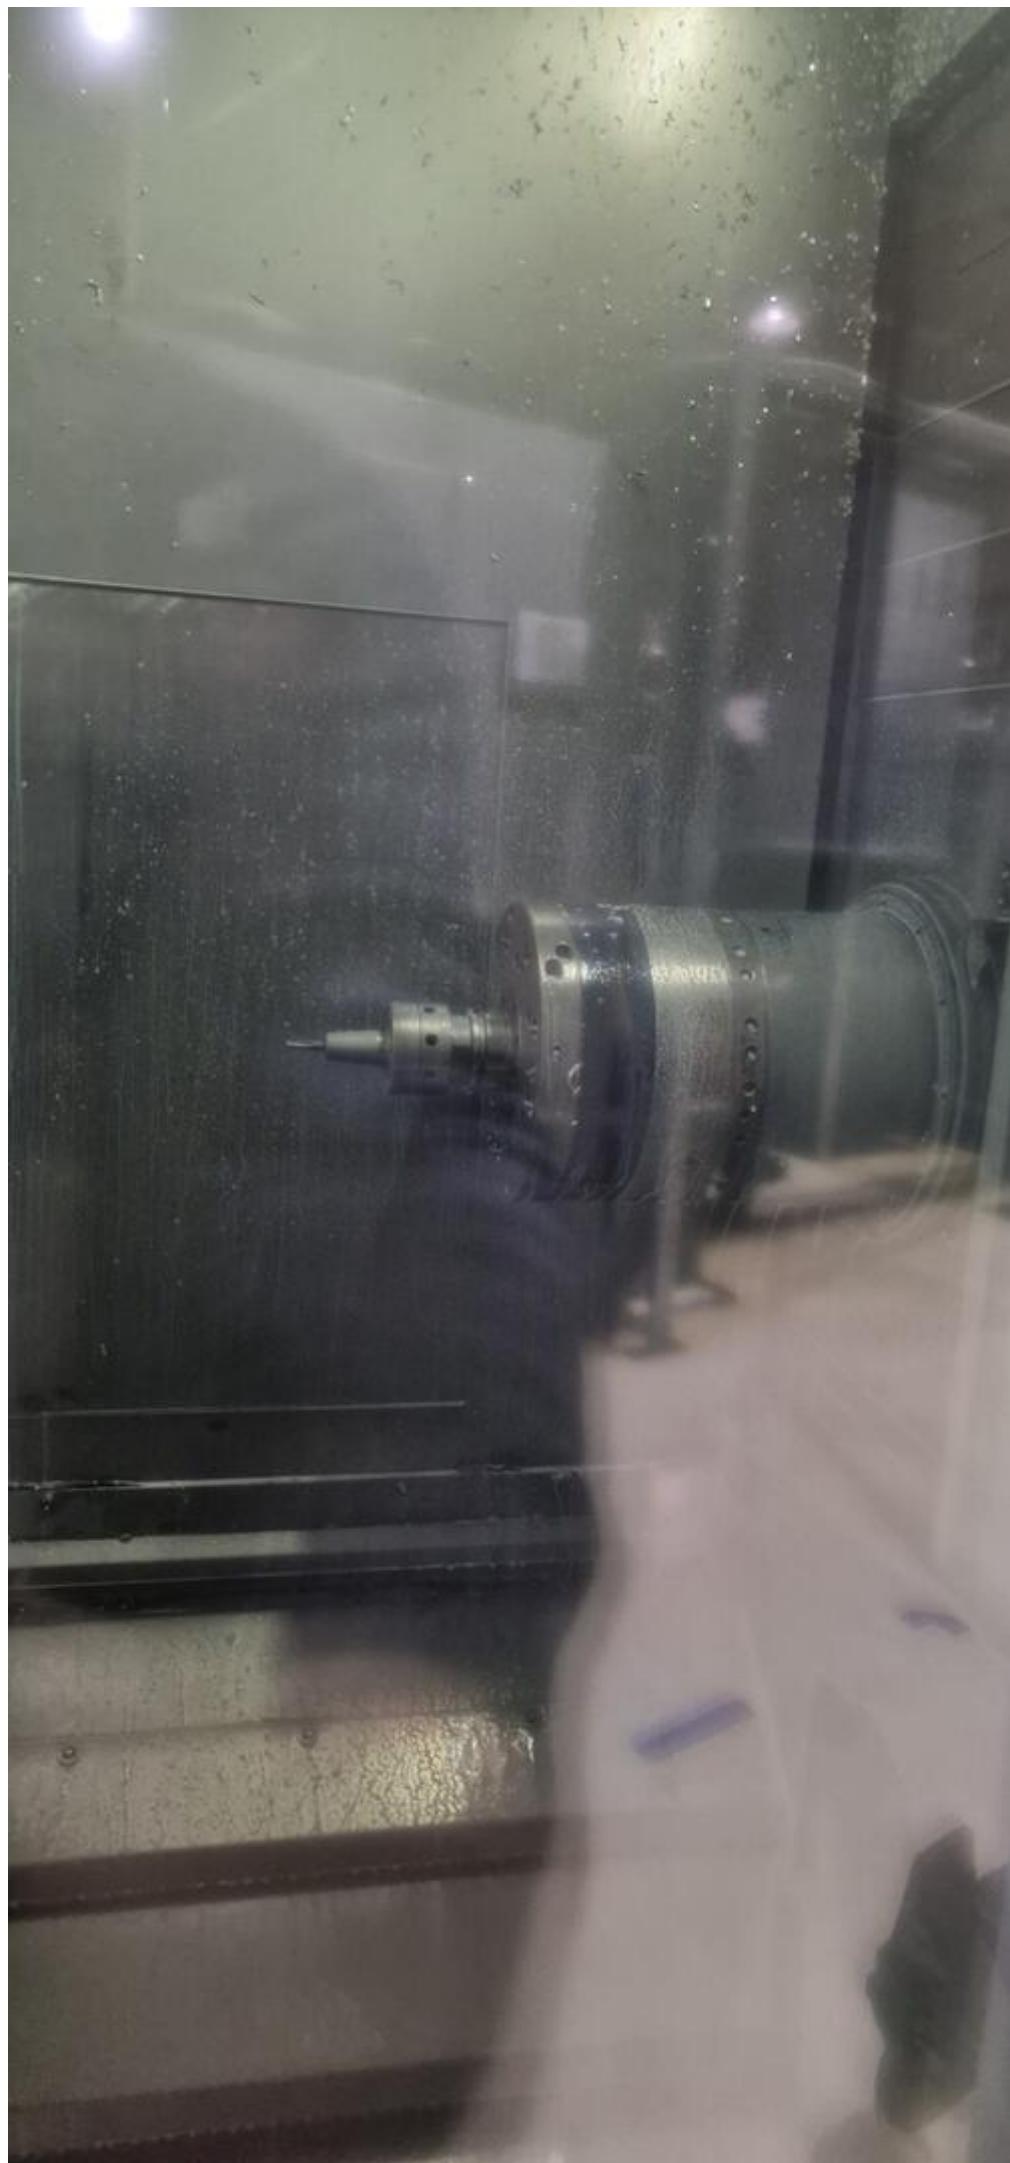







PD-CA612001-A

Werk
sich a

Kann zu Schn
sogar zum To

Diesen Bereich
Sicherheitsbe

Maschine aus
Bereich gear

The
with
cause sever
Do not enter
Isolate powe

Les
met
avertisseme

Les outils po
blessures.

Ne pas pén
s'assurer de
Couper puis
cette zone.

Gli
que
movimento
preavviso.


Ciò può ca
Accedere a
sicurezza.

Disinserire
lavora in q

El
m
producir e
incluso la
No entren
puedan ha
Desconecte
trabajen e



22

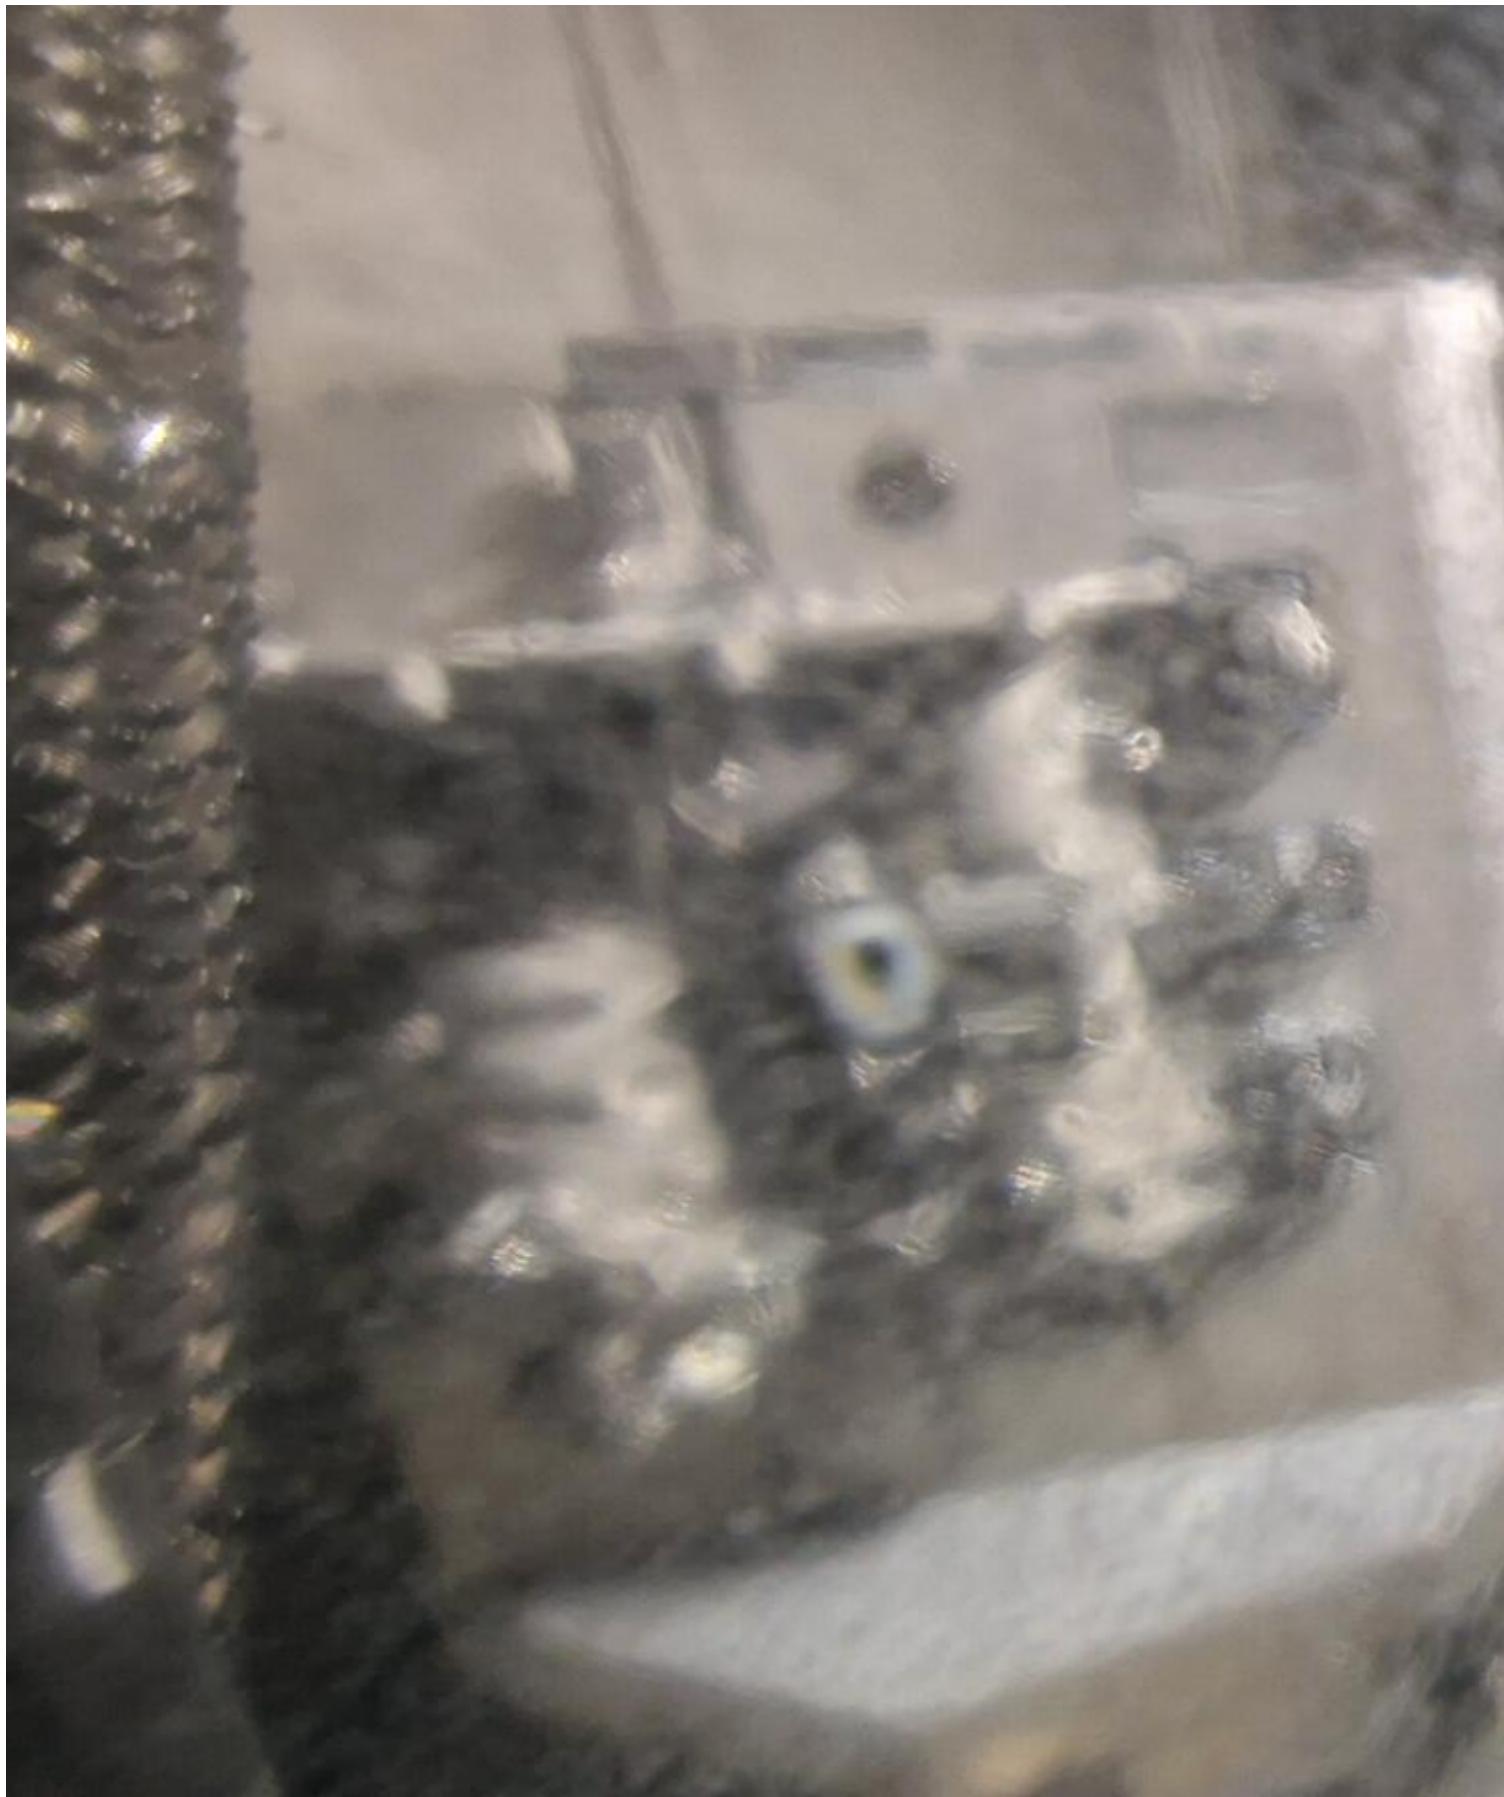

23



24



25









CONTROL
JTEKT CO.
MACH. No. NSP4
SUPPLY VOLTAGE AC
PHASE 3 FU
I.C. OF CIRCUIT BREAKER
SCCR OF CONTROL
POWER SUPPLY CAPACITY
AMP. OF LARGEST
MAX. BREAKER SIZE
ELECTRICAL DIAGRAM
DATE A.D. 2000
1-1, Asahimachi

外國為替及び外國貿易
にて販売。該當品を日本
等を行なう。

JTE

TYPE PH500-J

MACH. NO. NC3492


JTEKT COR

KARIYA







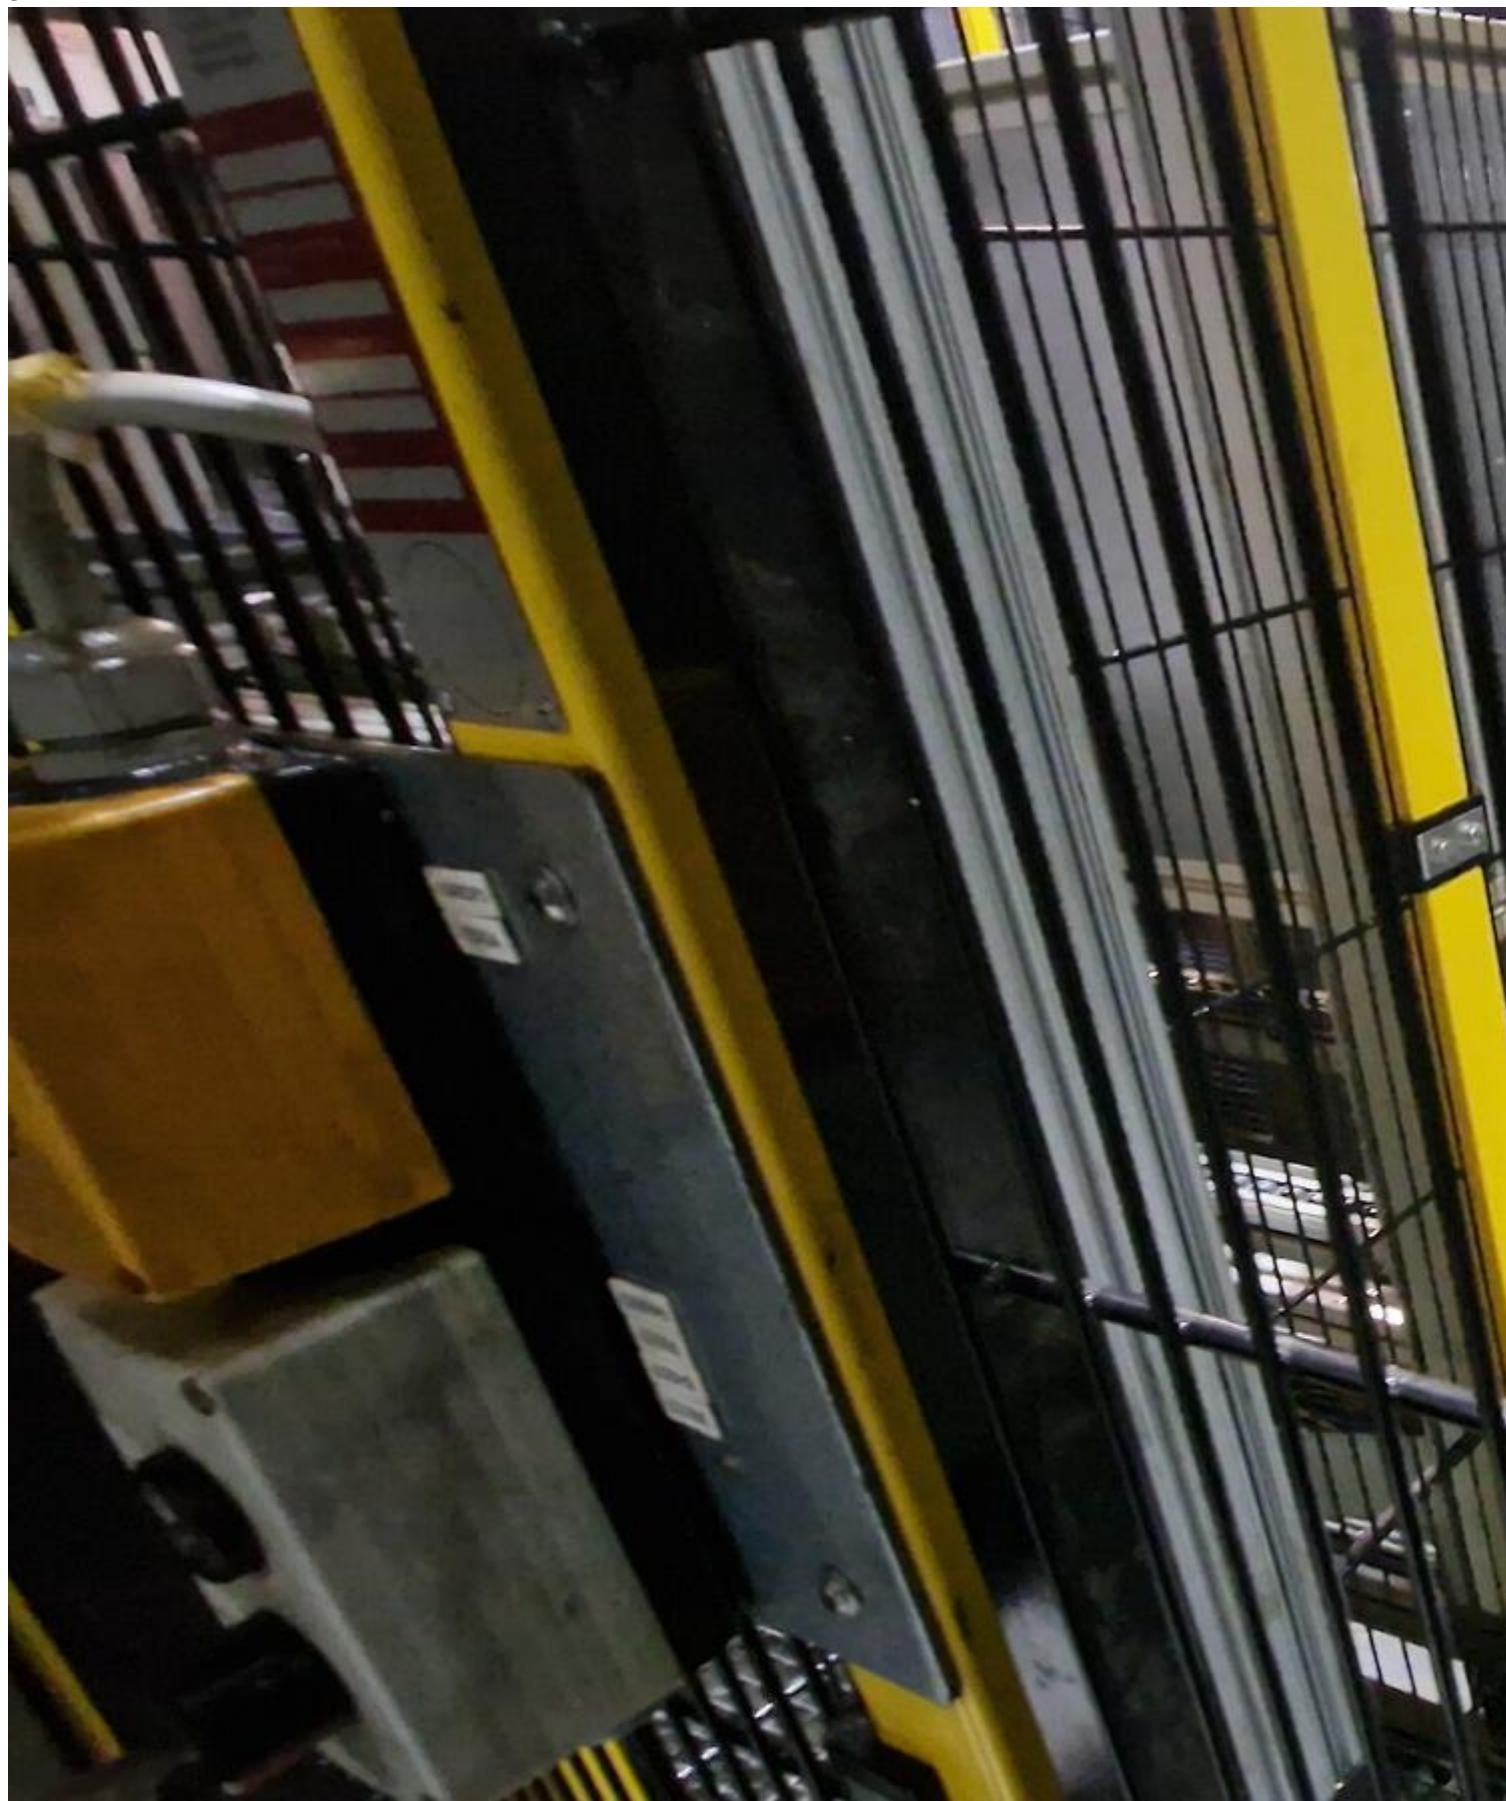














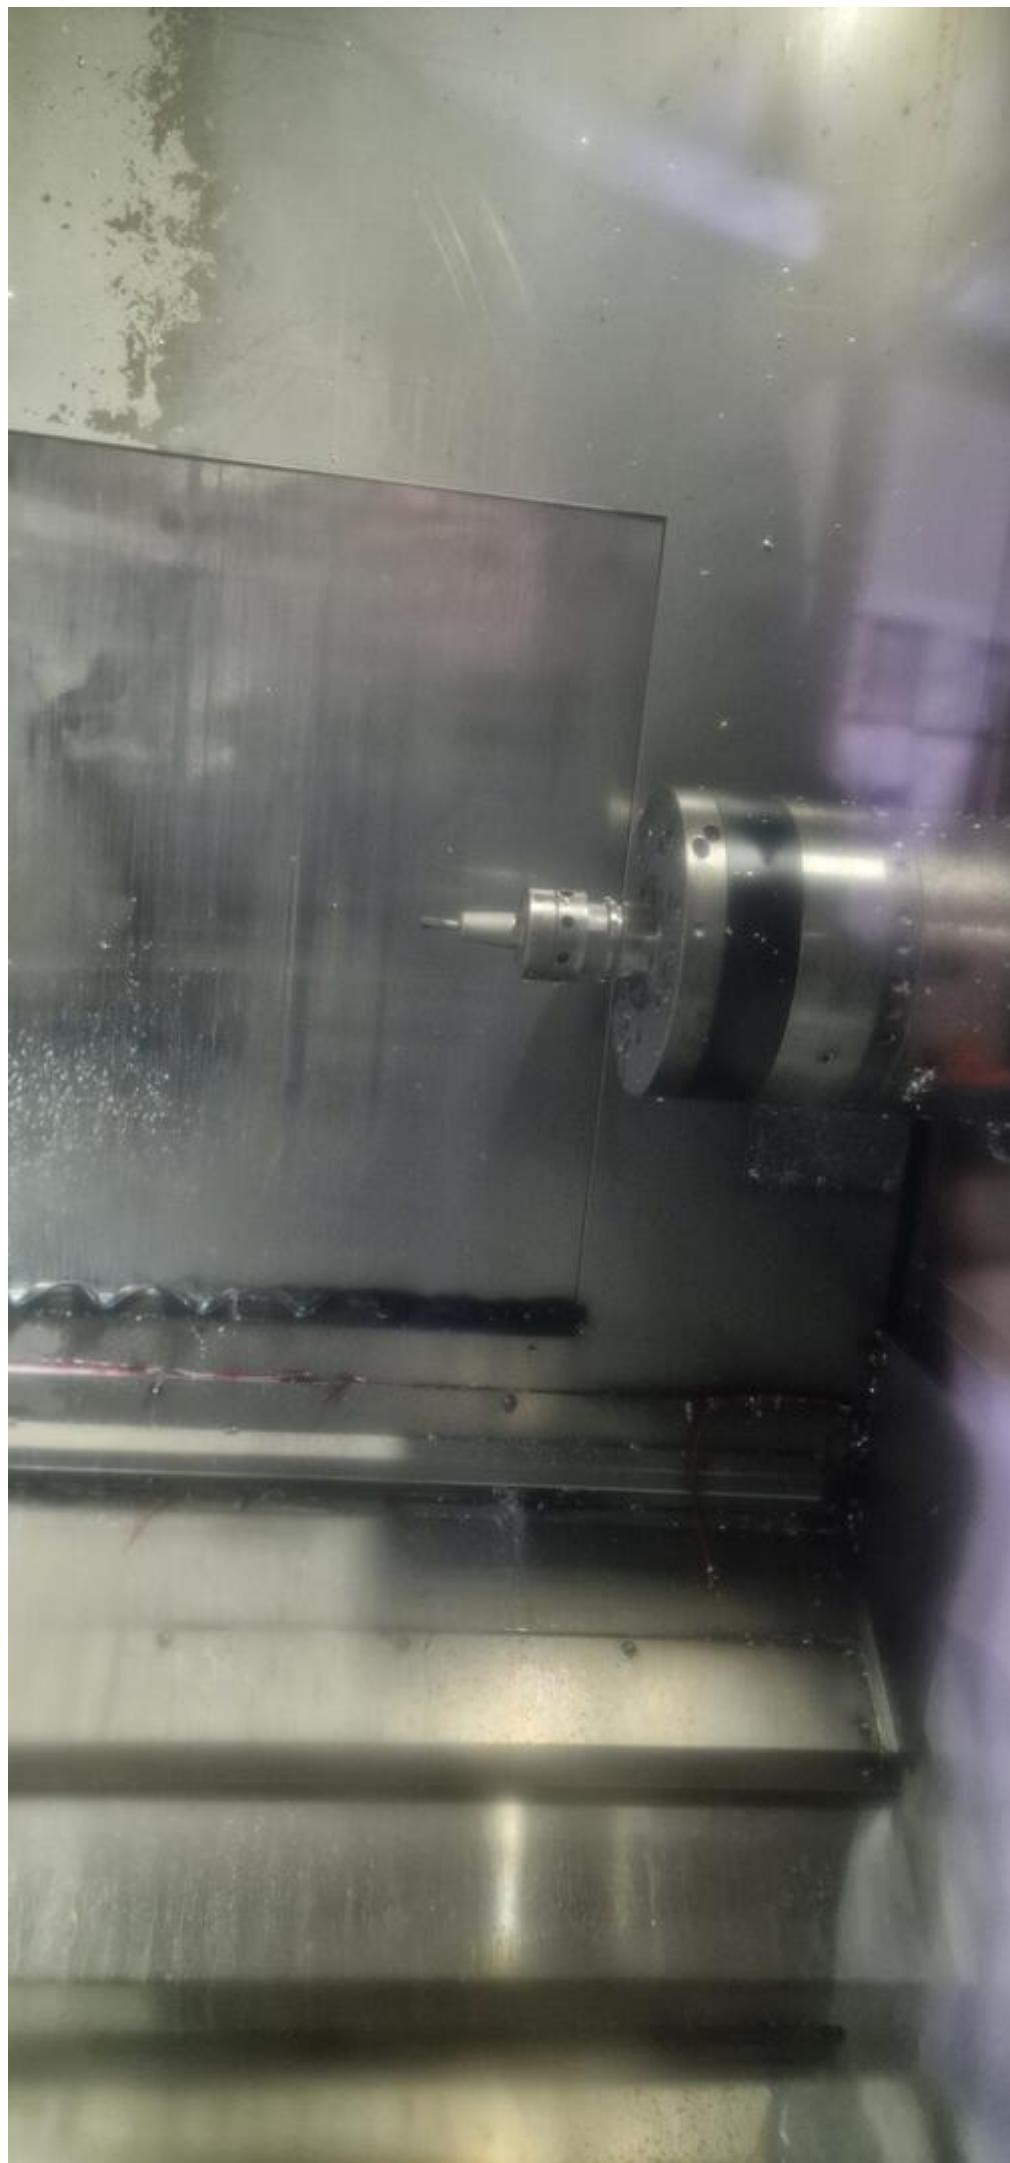

42



43





CONTROL SYSTEM			
JTEKT CORPORATION			
MACH. No.		TYPE	
SUPPLY VOLTAGE	200-400 V	FREQ.	50 Hz
PHASE	3	FULL LOAD AMP.	1 A
I.C. OF CIRCUIT BREAKER		KA	
SCCR OF CONTROL PANEL		kA	
POWER SUPPLY CAPACITY		kVA	
AMP. OF LARGEST LOAD		A	
MAX. BREAKER SIZE		A	
ELECTRICAL DIAGRAM No.		1	
DATE	2000-01-01		

I-1, Asahimachi, Kariya, Aichi, Japan

Toyoda - NS 3494
Inventarnummer
440440262


Prüfung
Datum: 2004
Durchgeführt von:
440440262

本製品は、外国海關及び外國貿易法に基づく検査機関に該当する場合が
あります。従って、該機関を日本から輸出する場合には、日本に基づけ
新規が必要とされます。

The exportation of this product may be subject to an
authorization with the government of the country of exportation.
Check with the government agency for the authorization.
In case of re-transfer, re-sale or re-export, it is necessary
for you to obtain a prior written consent of JTEKT based
on the agreement of your company and JTEKT based
on the agreement of your JTEKT representative for details.

Please contact your JTEKT representative for details.



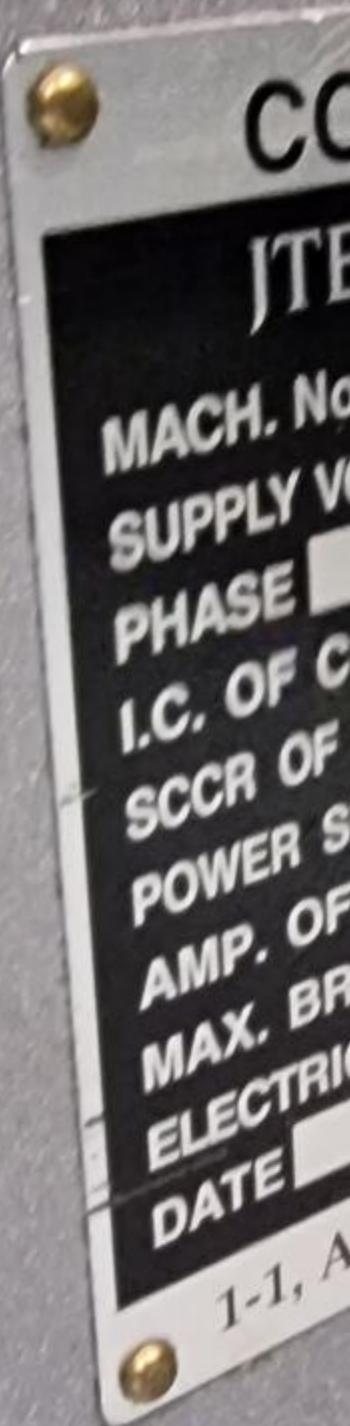

TYPE [REDACTED]
MACH. NO. [REDACTED]
JTEKT [REDACTED]

TYPE
MACH. N
JTEK



49



50

Video:





Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:
1452-12181925

Overview and Technical Data:

3x Used TOYODA FH 500j Horizontal Machine Center for Sale

TOYODA

TOYODA

Year of Build:
Sep 2010

Description:

Buy 3x used TOYODA FH 500j horizontal machining centers - High precision and efficiency

Are you looking for high-quality used horizontal machining centers? The used TOYODA FH 500j are ideal for precise machining and versatile applications in various industries. These TOYODA FH 500j horizontal machining centers offer exceptional performance and reliability for your manufacturing needs.

CNC control: Fanuc 32i for precise control and efficient machining.

Technical Data of FH500J Horizontal Machining Center

- **Dimensions of Tool Holder:** 500 mm
- **Rotary Table Positioning Angle:** 0.001°
- **Table Height (Palette):** 1100 mm
- **Travel Ranges:**
 - X-Axis: 730 mm
 - Y-Axis: 730 mm
 - Z-Axis: 850 mm
 - Distance (Spindle Tip to Table Center): 100–950 mm
 - Distance (Spindle Axis to Top of Work Holder): 50–780 mm
- **Feed Rates:**
 - Rapid Traverse (X, Y, Z): 60 m/min
 - Rapid Traverse (B-Axis): 14400°/min
 - Cutting Feed (X, Y, Z): 0.001–30 m/min
- **Spindle for different machining requirements:**
 - Speed Range: 50–15000 RPM
 - Diameter (Inner of Front Bearing): 80 mm
 - Spindle Nose Taper: ISO R297, Taper #40
- **Tool System:**
 - Number of Tools: 60
 - Tool Dimensions: Ø75 × 470 mm
 - Maximum Tool Weight: 8 kg
 - Tool Change Time: 0.9 sec (Tool-to-Tool)
- **Motors:**
 - Spindle Motor: 22/18.5 kW (15 min/Continuous Operation)
 - Hydraulic Pump Motor: 2.2 kW (4 HP)
- **Machine Size and Weight:**
 - Floor Area: 2330 × 4530 mm
 - Machine Weight: 13500 kg
- **Fluid and Air Requirements:**
 - Operating Oil: 18 L
 - Spindle Cooling Oil: 15 L
 - Compressed Air: 800 NL/min (0.4–0.5 MPa)
- **Electrical Connection:** 51 kVA
- **Precision:**
 - Positioning Accuracy: ±0.003 mm
 - Repeatability: ±0.0015 mm
- **Maximum Load:** 500 kg on the work table.

Advantages of the FH500J Horizontal Machining Center

- **High Precision and Reliability**
 - Exceptional positioning accuracy of ±0.003 mm and repeatability of ±0.0015 mm ensures precise machining even for complex parts.
 - Durable construction supports a long service life with minimal downtime.
- **Versatile Machining Capabilities**
 - Supports high-speed spindle operations with a range of 50–15,000 RPM, suitable for cutting, drilling, and finishing various materials.

- Wide tool capacity of 60 tools enhances flexibility for multi-operation jobs.
- **Efficiency and Productivity**
 - Rapid traverse speeds of 60 m/min (X, Y, Z) and a fast tool change time of 0.9 seconds reduce cycle times.
 - The robust table load capacity (up to 500 kg) accommodates large or heavy workpieces.
- **Compact and Space-Saving Design**
 - With a footprint of 2330 × 4530 mm, the machine fits efficiently in most manufacturing spaces while maintaining excellent functionality.
- **Advanced Motor Performance**
 - A high-powered spindle motor (22/18.5 kW) ensures smooth and powerful machining, even on tough materials.
 - High-speed rotary B-axis (14,400°/min) enables complex angular machining and 4-axis work.
- **Ease of Maintenance**
 - Optimized oil and air systems, with clear sight glasses and maintenance indicators, simplify daily checks.
 - Built-in cooling systems for spindle and control ensure stable operation during long production runs.
- **Flexible Tooling and Standards Compliance**
 - Tool holders comply with JIS BT40 standards, ensuring compatibility with a wide range of tooling options.
 - Meets various safety and operational standards for global export and deployment.

Typical Usage Scenarios for the FH500J Machine

- **Automotive Industry**
 - Ideal for machining complex engine components, gear housings, and other critical automotive parts with high precision.
- **Aerospace Sector**
 - Suited for creating lightweight yet robust parts such as brackets, frames, and connectors with tight tolerances.
- **Industrial Equipment Manufacturing**
 - Supports the production of heavy-duty components like hydraulic pumps, motor housings, and gear assemblies.
- **Tool and Die Making**
 - Facilitates the manufacturing of molds, dies, and tooling equipment requiring intricate designs and surface finishes.
- **General Engineering**
 - Useful in workshops that cater to custom or batch production of machined parts for various industries.
- **Medical Device Manufacturing**
 - Provides the precision needed for creating surgical tools, implants, and diagnostic equipment components.

Why buy a TOYODA FH 500j horizontal machining center?

The used TOYODA FH 500j offers excellent performance and precision for all types of machining projects. Whether you are looking for used horizontal machining centers in Germany or starting a new project, this used horizontal machining center is a reliable and cost-effective solution for your production needs.

Optimize your production with a used TOYODA FH 500j horizontal machining centre from our industrial machinery dealers. Take the opportunity to increase your efficiency with a durable and powerful horizontal machining center.

Technical Data:

Technical Data:

Control:

[Series 32i](#)

Machine Hours:

92.450 hrs.

Spindle Speed:

15.000 rpm

Tool Holder:

[SK40](#)

Tool Capacity:

60 x

Travels:

X-Axis:

730 mm

Y-Axis:

730mm

Z-Axis:

850 mm

Dimensions and Weight:

Width:

4.530 mm

Length:

2.330 mm

Weight:

13.500 kg

Buyer Information:

Condition:

[Very good condition](#)

Availability:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)


Buyers Premium:

[18 %](#)

Location:

Germany


Images:

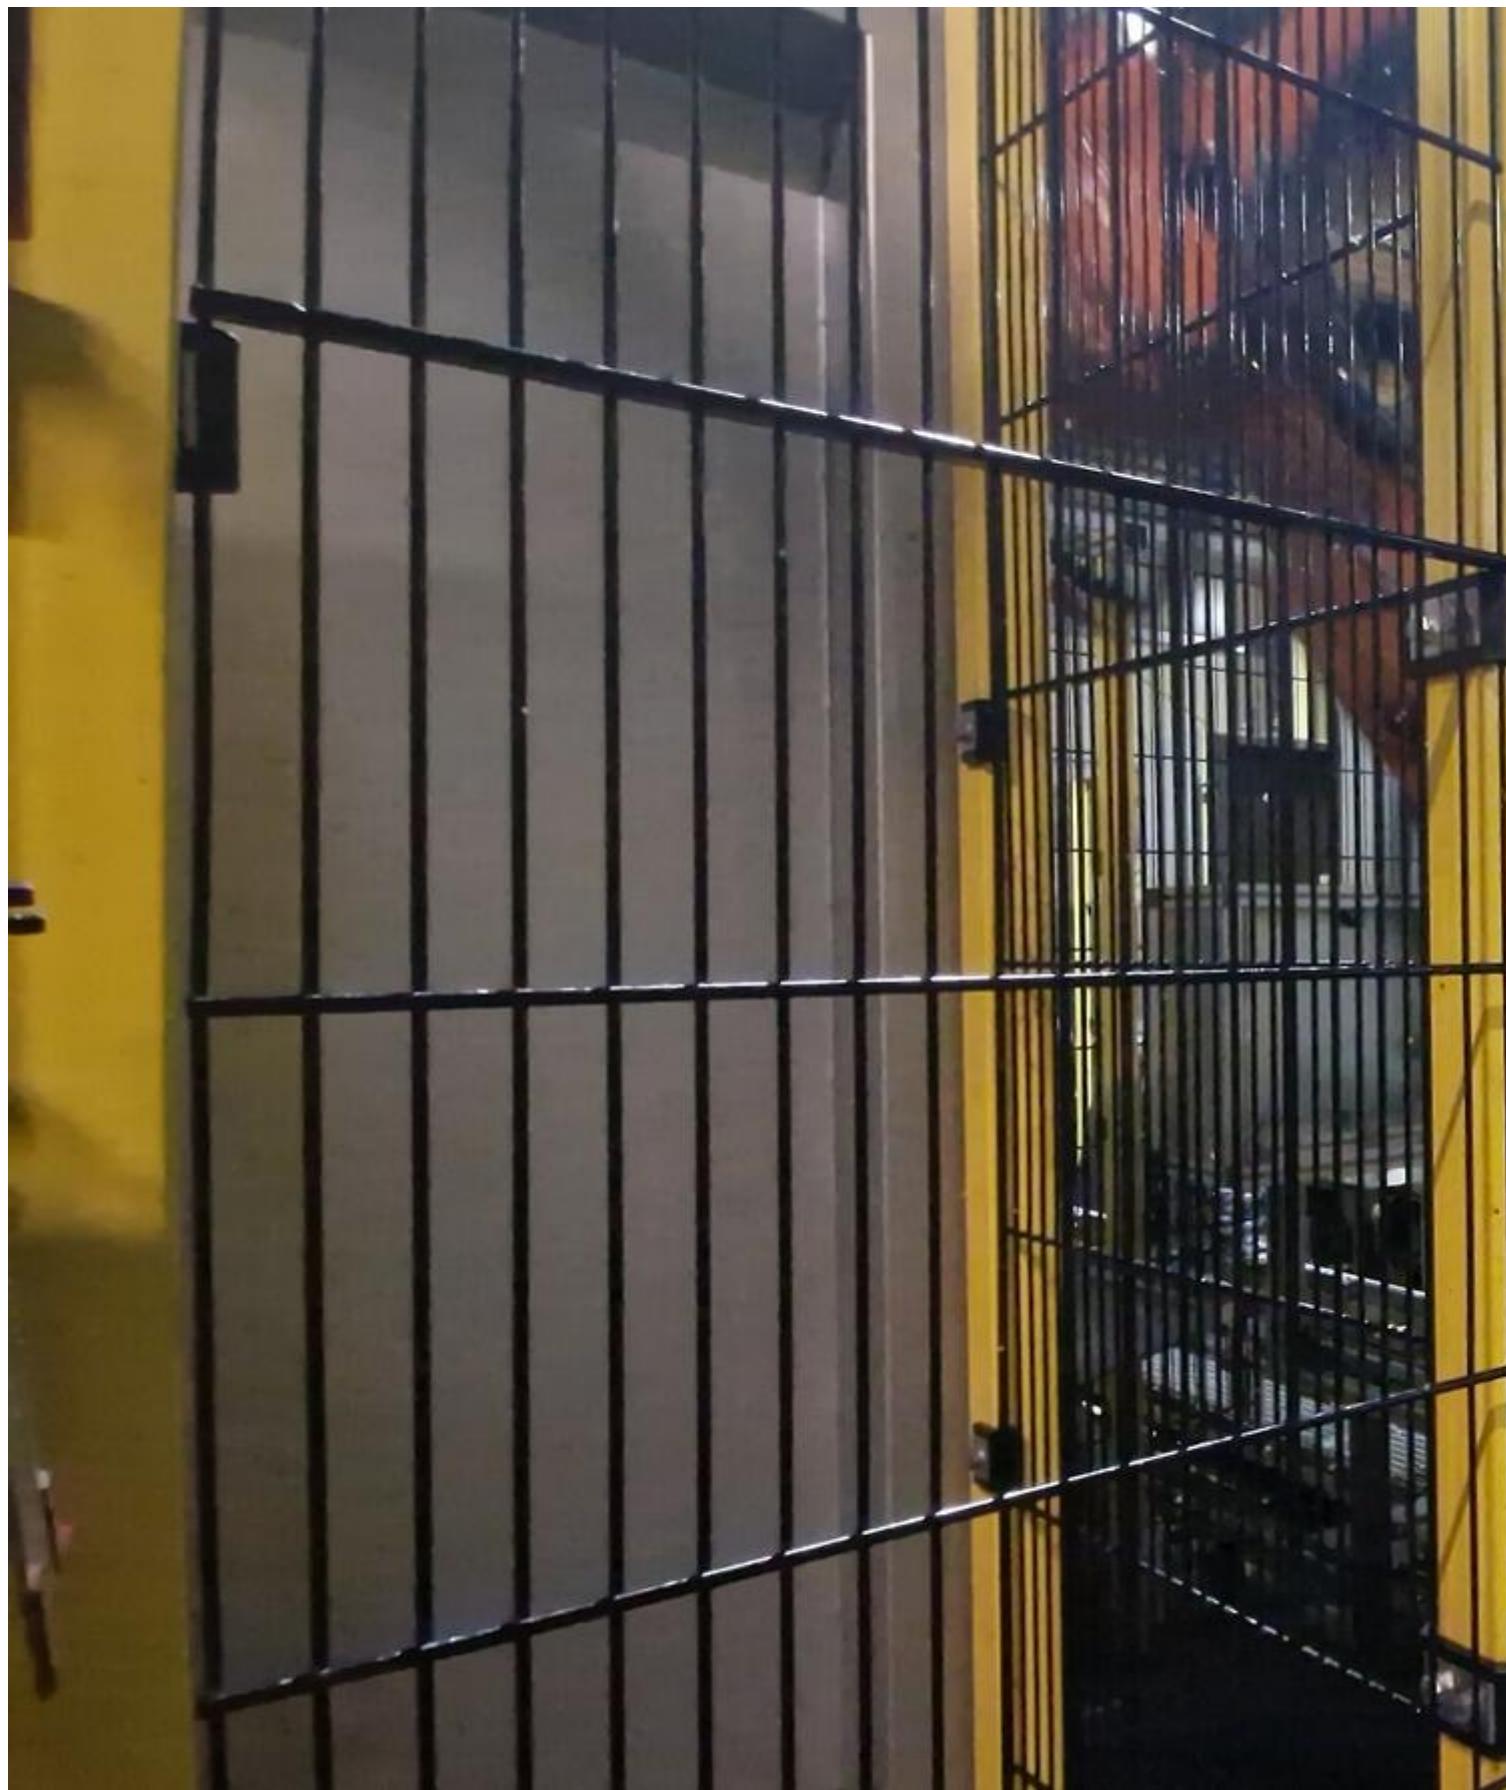







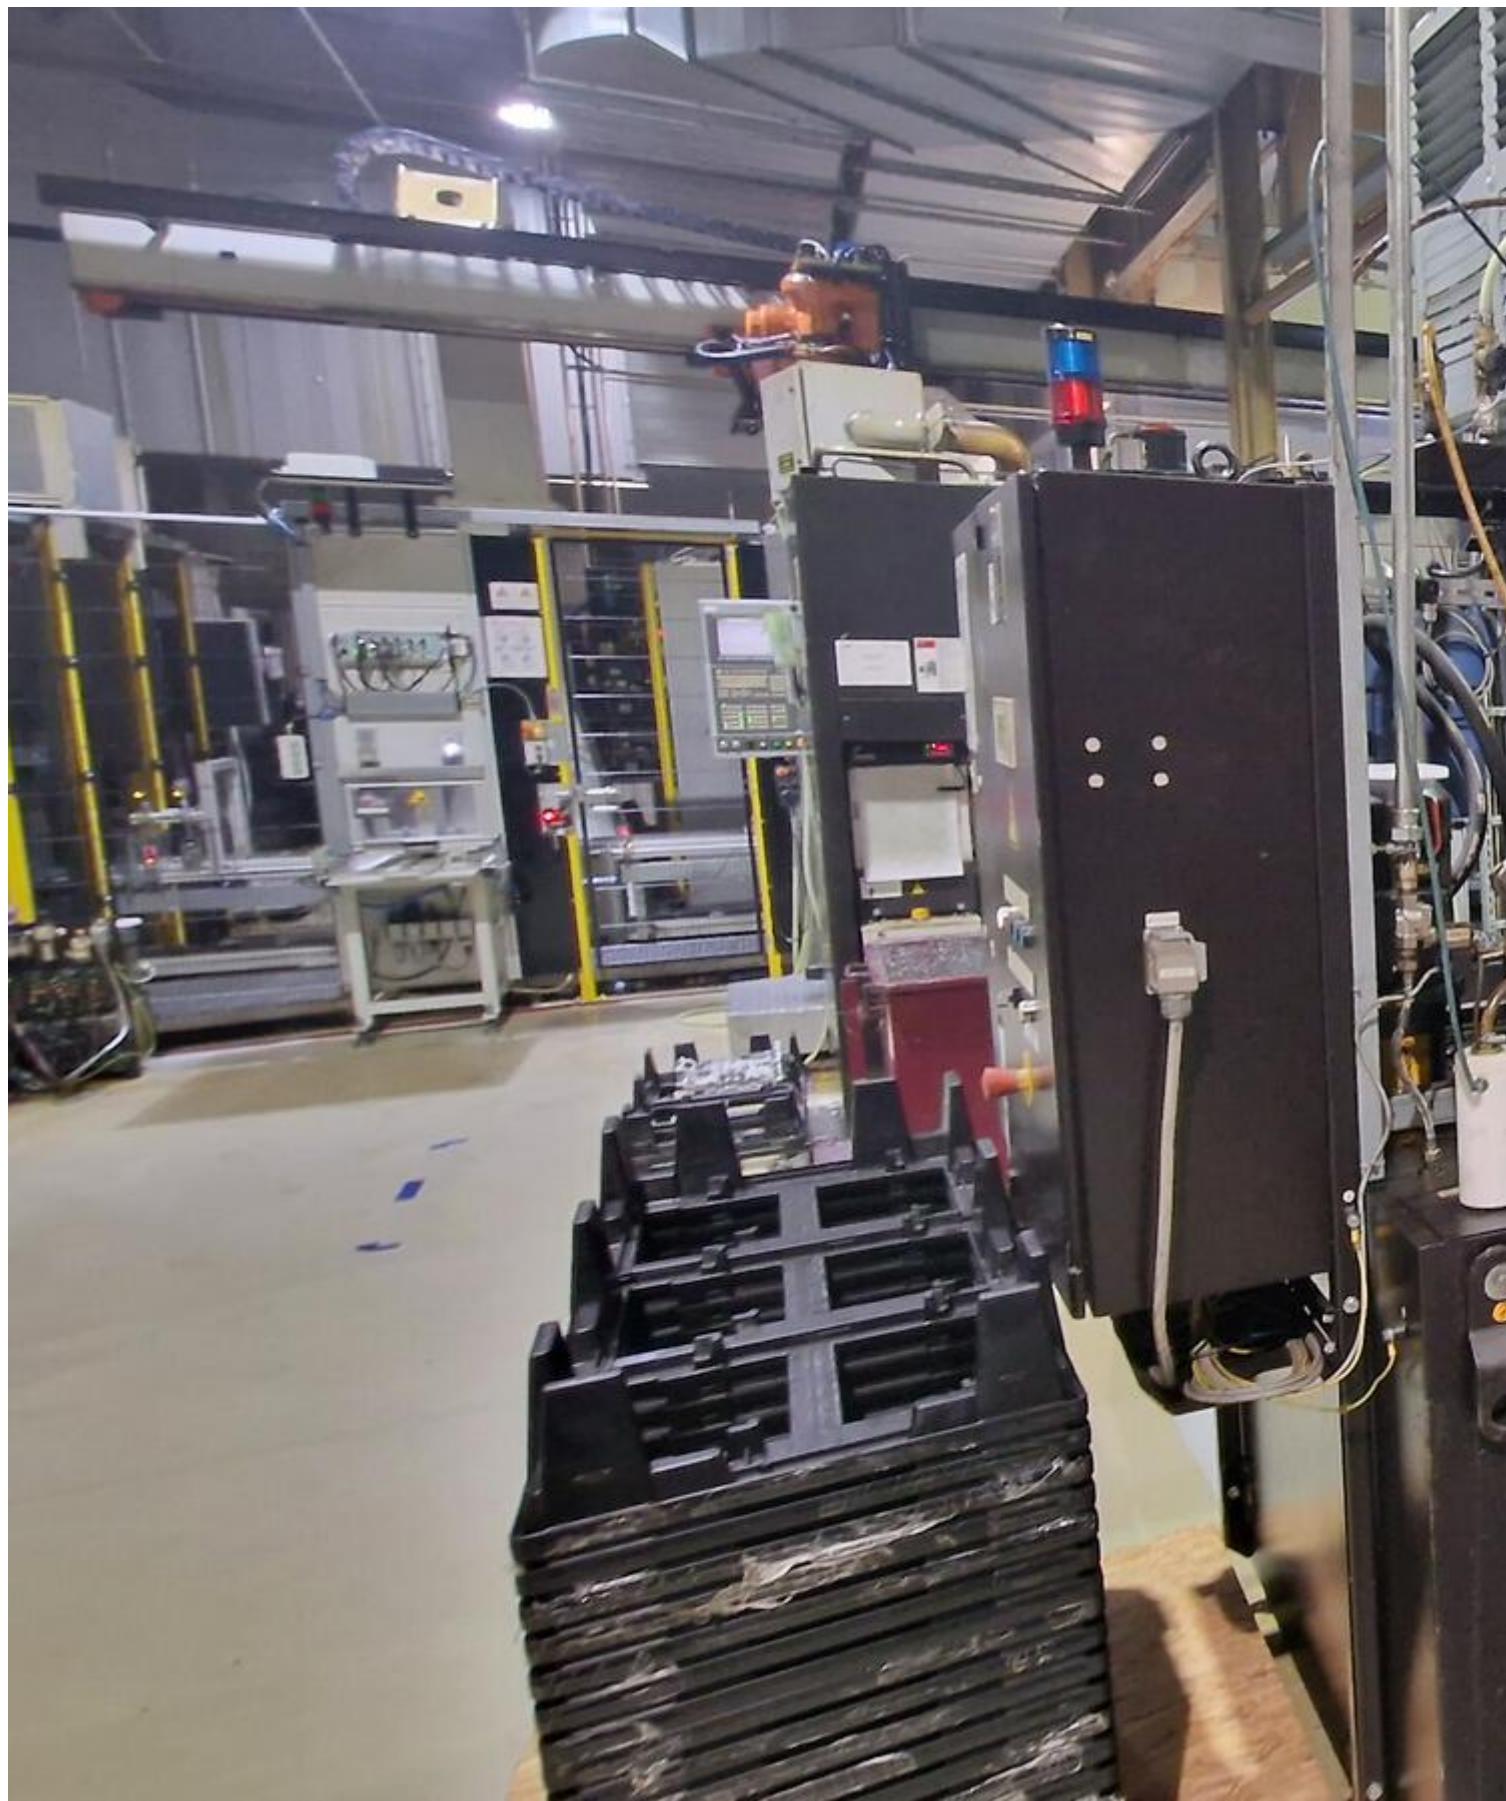











10



11







Werkzeuge und W...
sich automatisch...
Kann zu Schnitt- und Quetsch...
sogar zum Tode führen.

Diesen Bereich nicht betreten.
Sicherheitsbestimmungen
Maschine ausschalten, wenn
Bereich gearbeitet wird.

The machine will move...
without warning and...
cause severe crushing inju...
Do not enter this area unless...
Isolate power when working...

Les outils dans l'...
mettre en mouvement...
avertissement.

Les outils peuvent engendrer...
blessures.

Ne pas pénétrer dans cette...
s'assurer de l'absence de...
Couper puissance en cas...
cette zone.

Gli utensili e i pezzi...
quest'area possono...
movimento automaticamente...
preavviso.

Ciò può causare gravi lesioni.
Accedere a quest'area è pericoloso.

Disinnescare l'alimentazione...
lavora in quest'area.


Elementos del...
moverse inesperadamente...
producir en consecuencia...
incluso la muerte.

No entran en esta zona...
puedan hacer con total...
Disconnecten la corriente...
trabajen en esta zona.







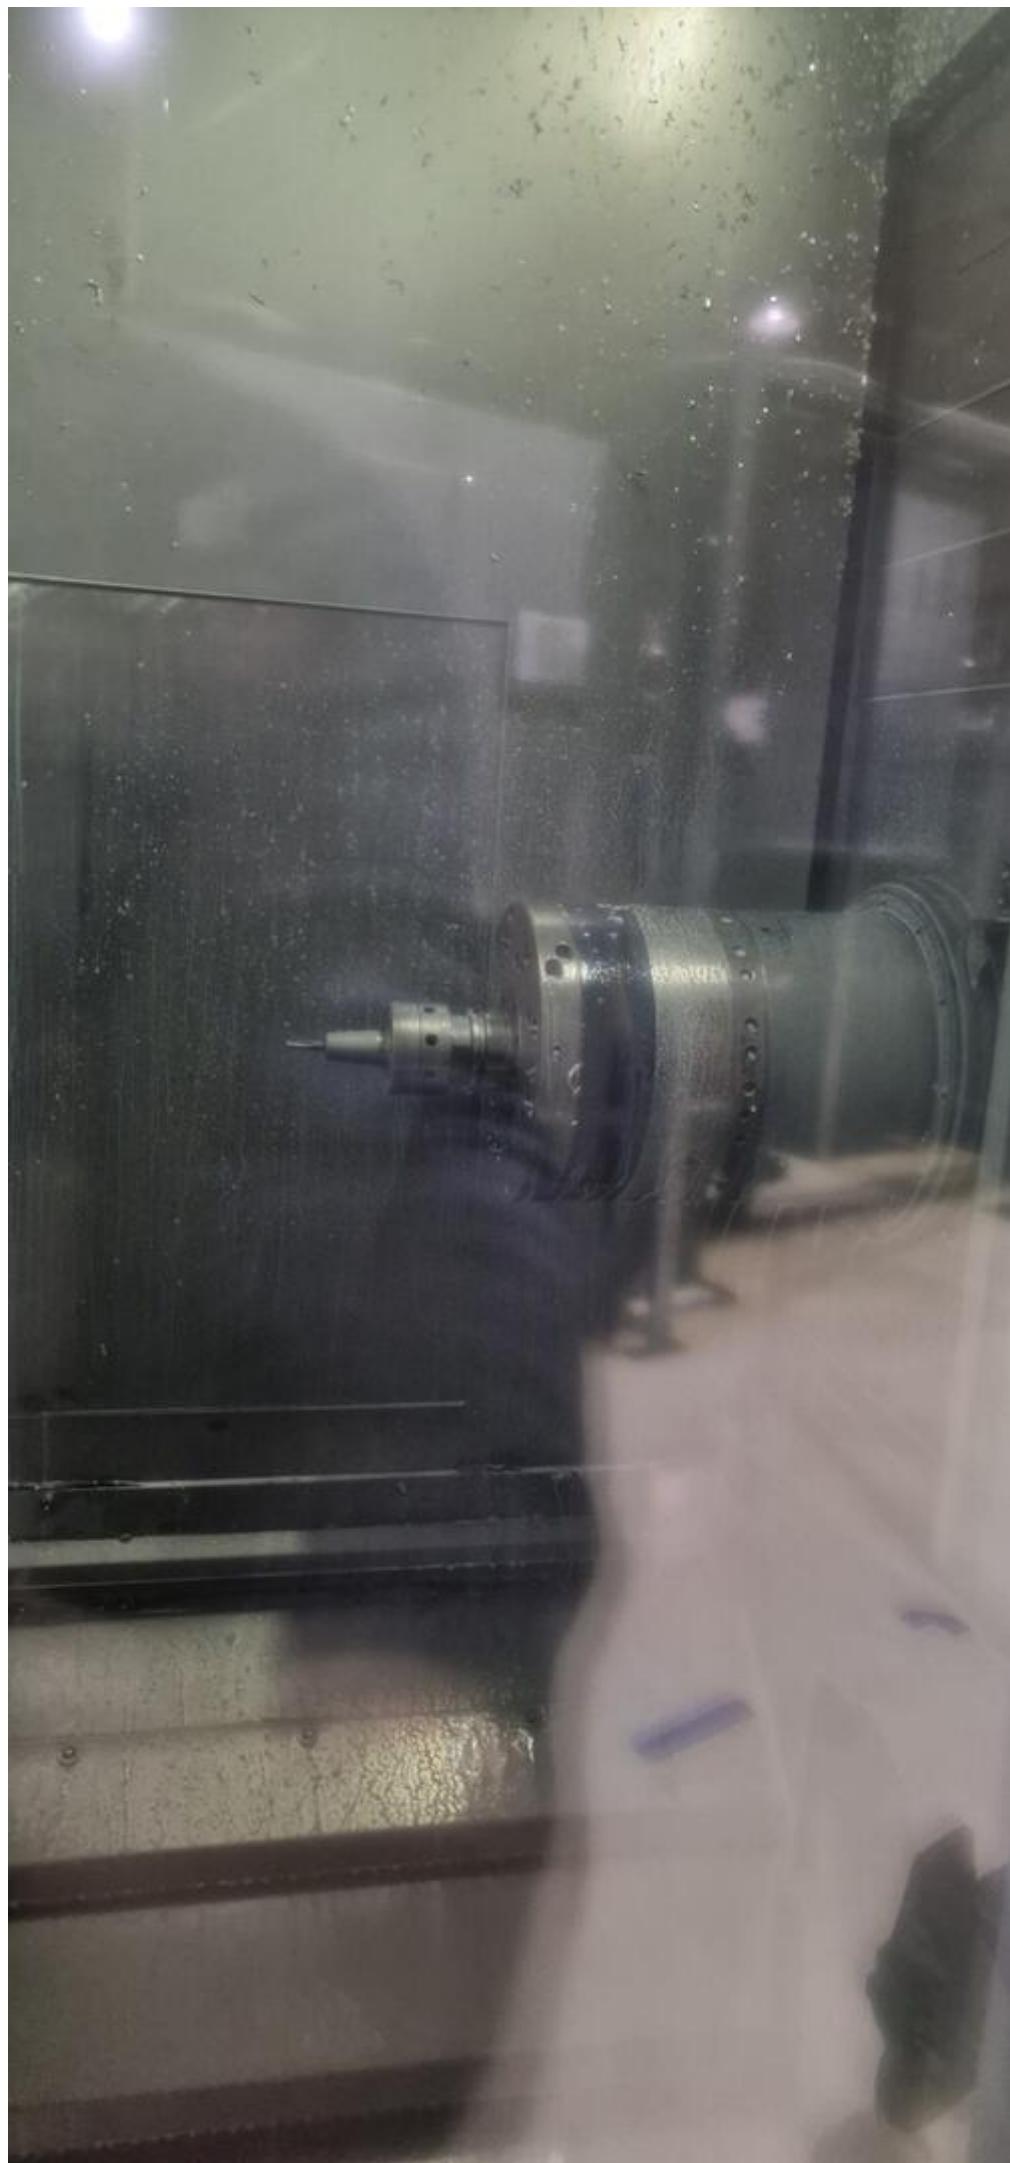







PD-CA612001-A

Werk
sich a

Kann zu Schn
sogar zum To

Diesen Bereich
Sicherheitsbe

Maschine aus
Bereich gear

The
with
cause sever
Do not enter
Isolate powe

Les
met
avertisseme

Les outils po
blessures.

Ne pas pén
s'assurer de
Couper puis
cette zone.

Gli
que
movimento
preavviso.


Ciò può ca
Accedere a
sicurezza.

Disinserire
lavora in q

El
m
producir e
incluso la
No entren
puedan ha
Desconecte
trabajen e



22

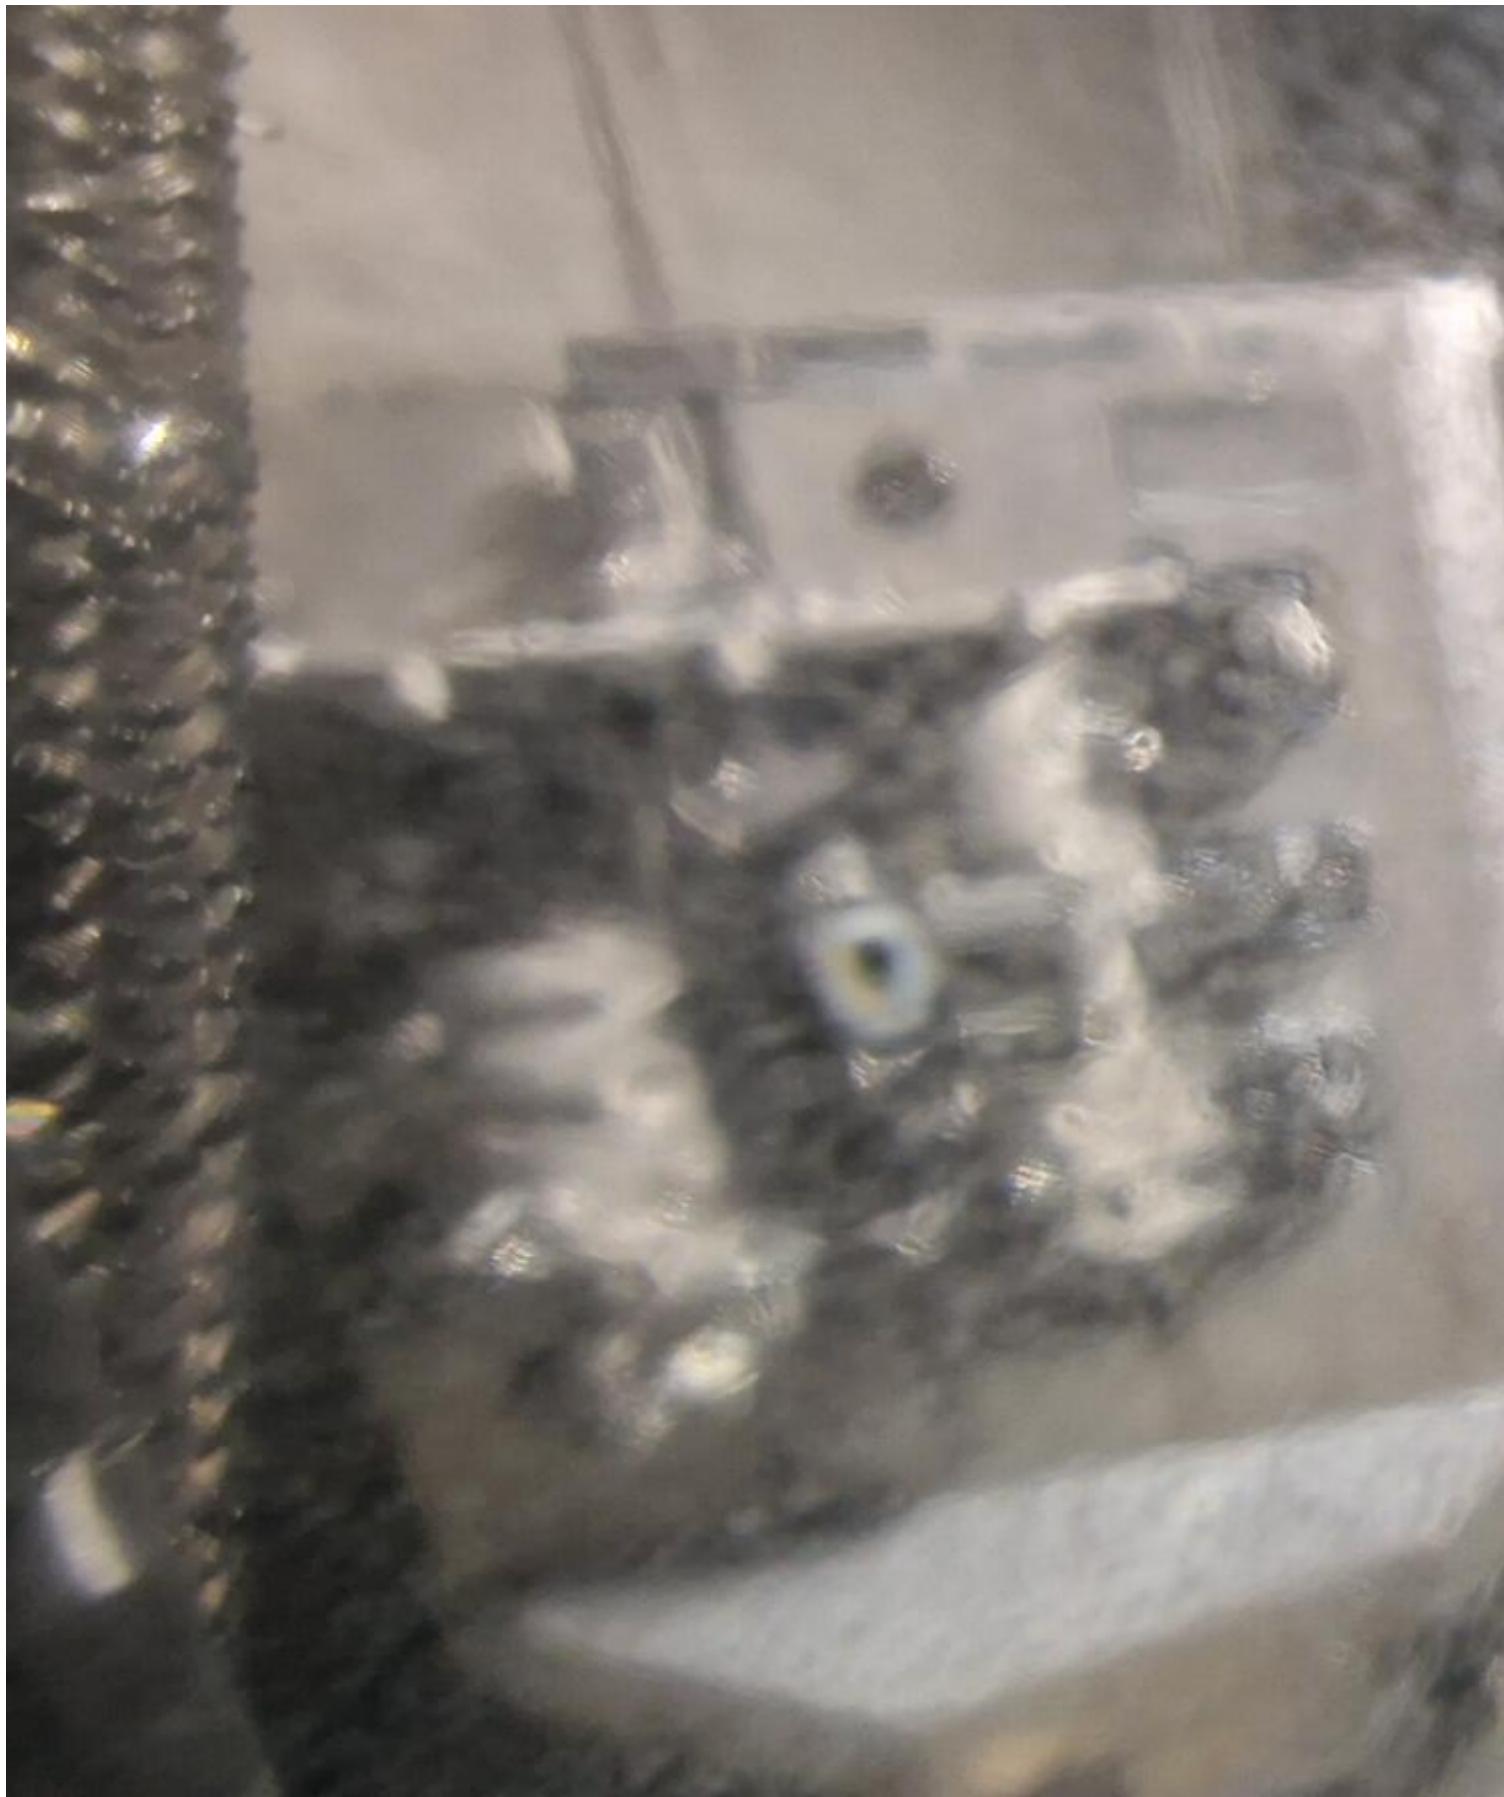

23



24



25









CONTROL
JTEKT CO.
MACH. No. NSP4
SUPPLY VOLTAGE AC
PHASE 3 FU
I.C. OF CIRCUIT BREAKER
SCCR OF CONTROL
POWER SUPPLY CAPACITY
AMP. OF LARGEST
MAX. BREAKER SETTING
ELECTRICAL DIAGRAM
DATE A.D. 2000
1-1, Asahimachi

外國為替及び外國貿易
にて販売。該當品を日本
等を行なう。

JTE

TYPE PH500-J

MACH. NO. NC3492


JTEKT COR

KARIYA







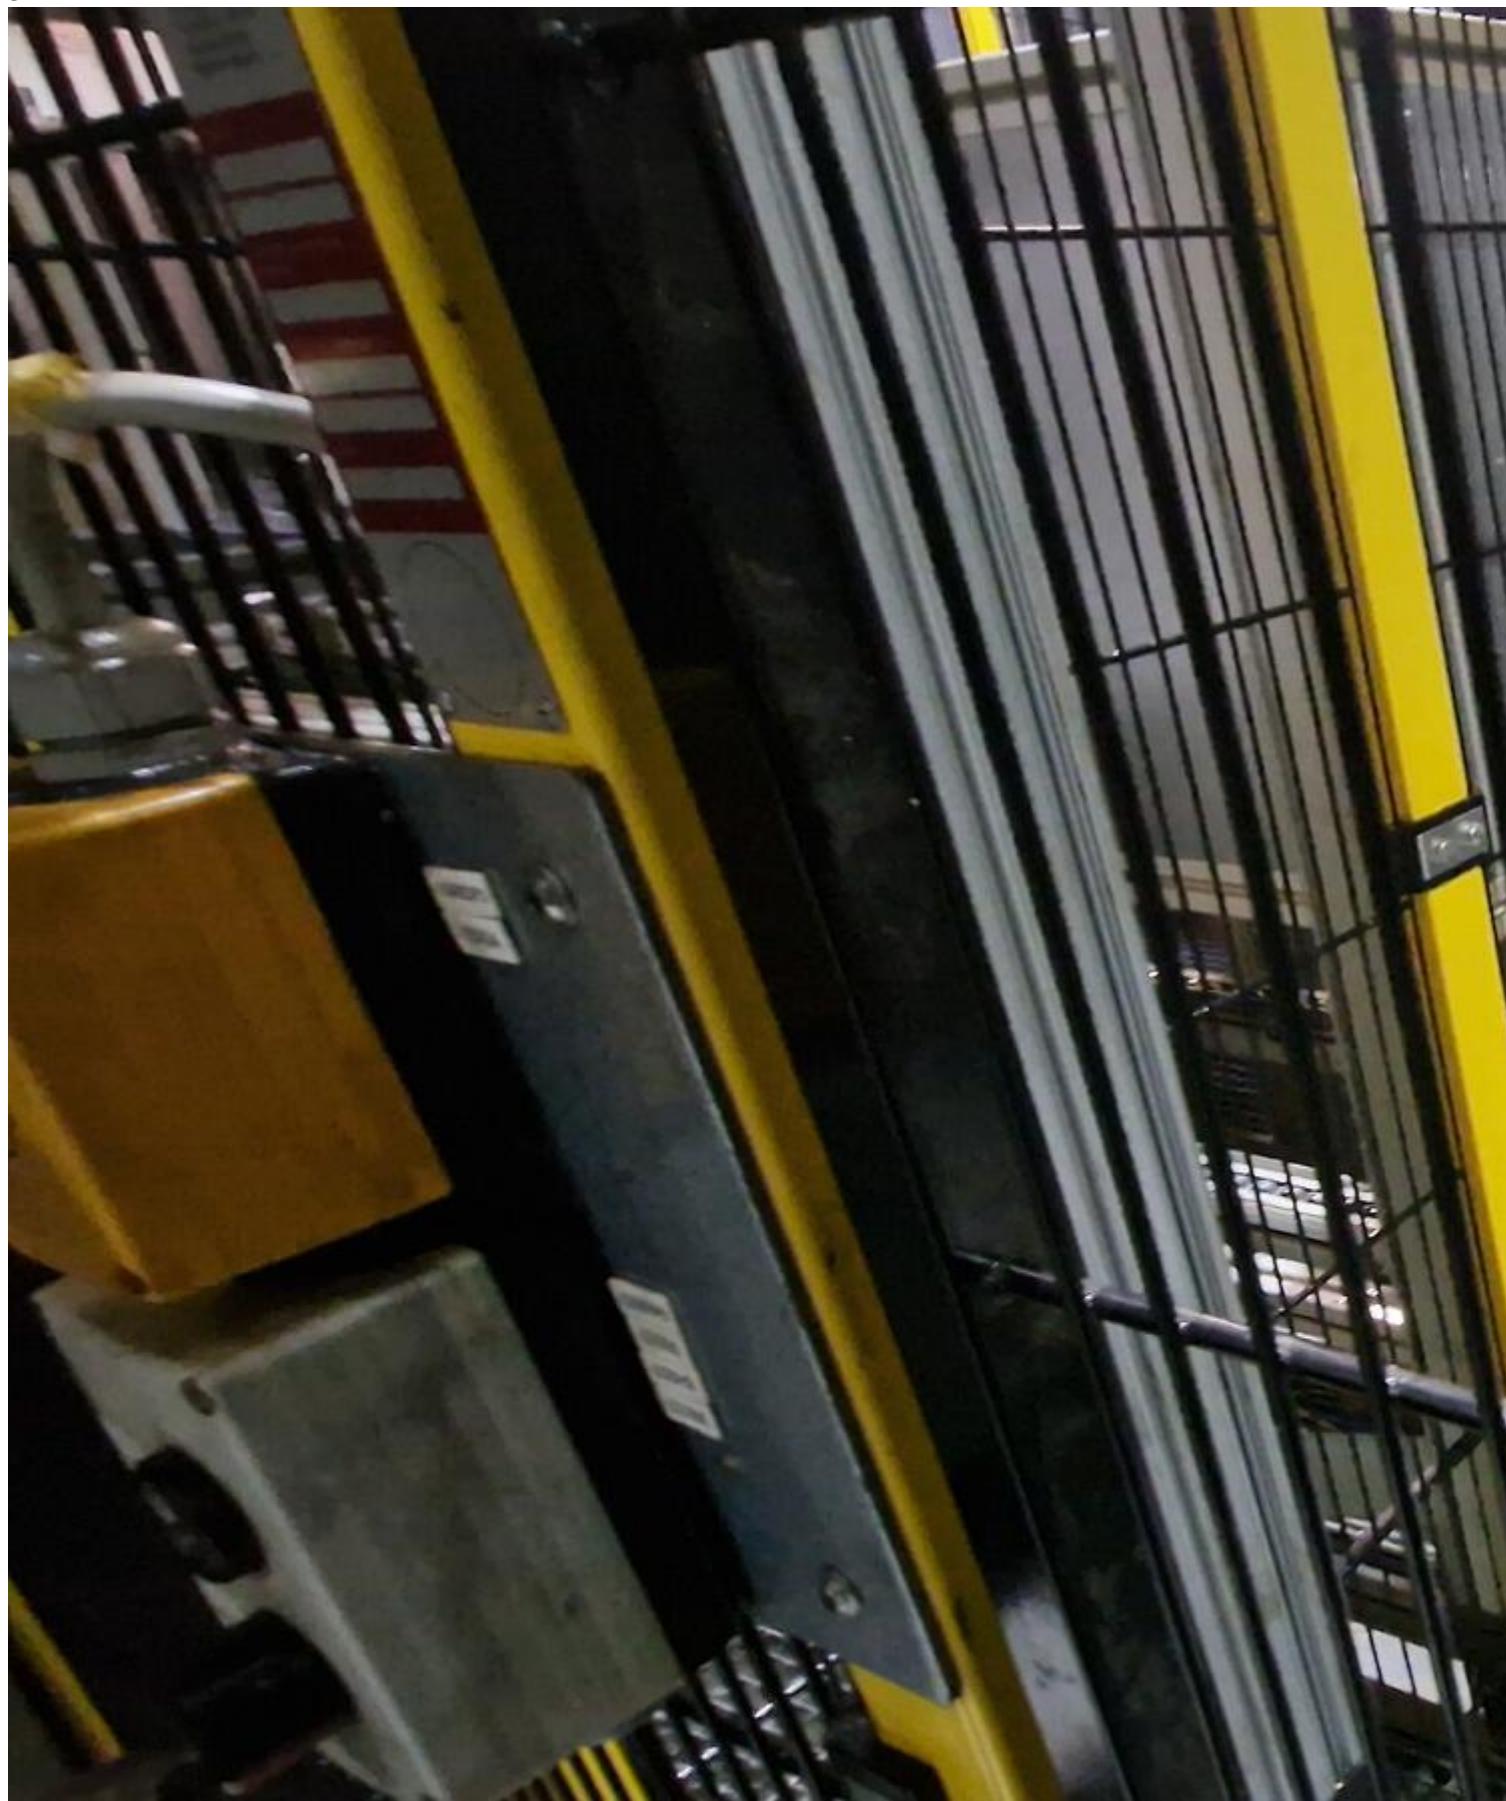














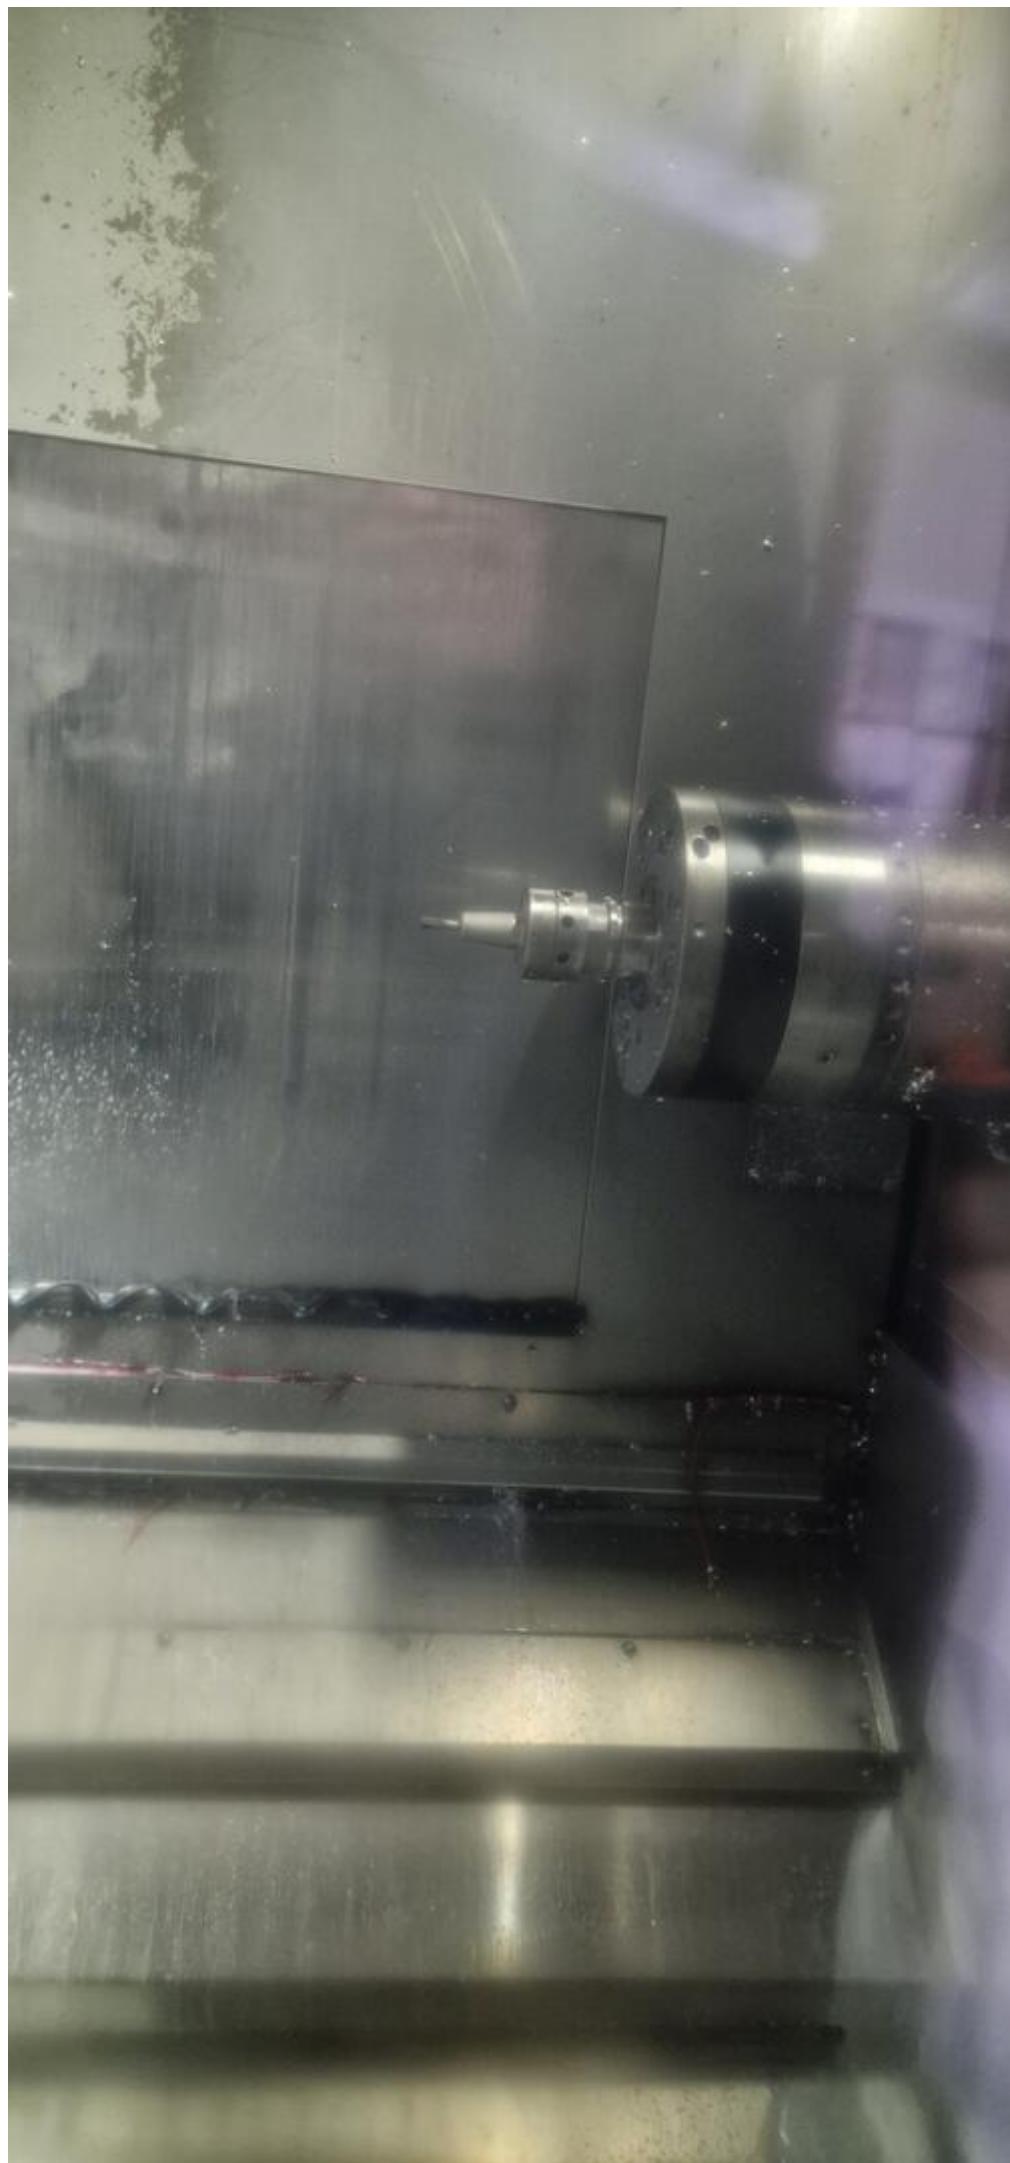

42



43






Toyoda - NS 3494
Inventarnummer
440440262

Prüfung
Datum 2004
Scheinnummer
440440262

本製品は、外国海關及び外國貿易法に基づく検査機関に該当する場合が
あります。従つて、該機関を日本から輸出する場合は、該法に基づく
許可が必要とされます。
The exportation of this product may be subject to an
authorization with the government of the country of exportation.
Check with the government agency for the authorization.
In case of re-transfer, re-sale or re-export, it is necessary
for you to obtain a prior written consent of JTEKT based
on the agreement of your company and JTEKT based
on the agreement of your JTEKT representative for details.
Please contact your JTEKT representative for details.



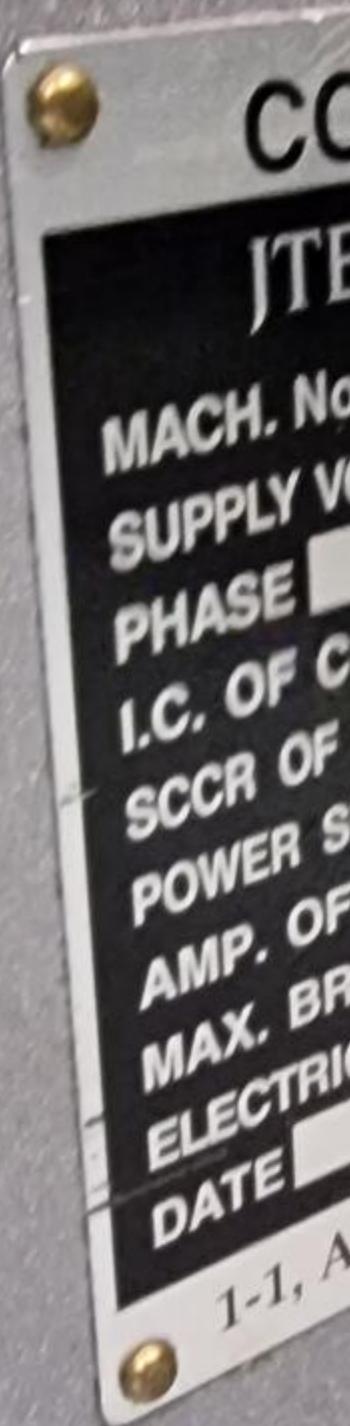

TYPE [REDACTED]
MACH. NO. [REDACTED]
JTEKT [REDACTED]

TYPE
MACH. N
JTEK



49



50

Video:





Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 12.02.2026

© Copyright 2026 - [Asset-Trade](#)

Page