

Image not found or type unknown



Ref. No.:

851-12221207

Overview and Technical Data:

DOOSAN - Puma 280M CNC Lathe

DOOSAN



Year of Build:
Jan 2008

Description:

Used DOOSAN Puma 280M CNC lathe

CNC Control Fanuc i-Series

Technical specifications:

- Turning diameter 255 mm
- Turning length 1,030 mm
- Circumference diameter over bed 630 mm
- Circumferential diameter over cross slide 460 mm
- Max. Turning diameter 410 mm

Main spindle:

- Speed range - main spindle max. 3,500 min / -1
- Drive power - main spindle 22 / 18,5 kW
- Max. Torque 625 Nm
- Spindle nose ASA A2-8
- Spindle bearing diameter 140 mm
- Spindle bore 86 mm
- Rod diameter 76 mm
- C axis 0.001 °
- Chuck diameter max. 255 mm

Turret:

- Number of tool places 12 pos.
- powered stations 12 pos.
- Speed range - ang. Tools max. 5,000 min -1
- Drive power - angetr. Tools 5.5 kW
- Shank diameter 25 mm
- Drill diameter 40 mm
- Change time 0.15 sec

Travel:

- x-axis 242 mm
- z-axis 1,100 mm

Tailstock:

- Pinole diameter 100 mm
- Quill stroke 100 mm
- Tailstock mount MT 5

Feeds:

- Rapid traverse X: 24 / Z: 30 m / min
- Total power requirement 38.4 kVA
- Space required approx. 5.0

Technical Data:

Technical Data:

Control:

[FANUC](#)

Turning length:

1030.00 mm

Turning diameter:

255.00 mm

Spindle Speed:
3500.00 rpm
Driven Tools:
12.00
Tool Capacity:
12 x
Tailstock:
Yes
Bezel:
No

Dimensions and Weight:

Height:
1735 mm
Length:
3418 mm
Width:
1670 mm
Weight:
4900 kg

Buyer Information:

Condition:
[Very good condition](#)
Available:
[Sold](#)
Sold as:
[EXW \(Ex Works - Incoterm\)](#)
VAT:
[19 %](#)
Buyers Premium:
[16 %](#)
Location:
Germany

Images:





Doosan
Puma 280 M
280

SAFETY
WARNING
DO NOT TOUCH
MOVING PARTS

DOOSAN

DOOSAN - FANUC i Series

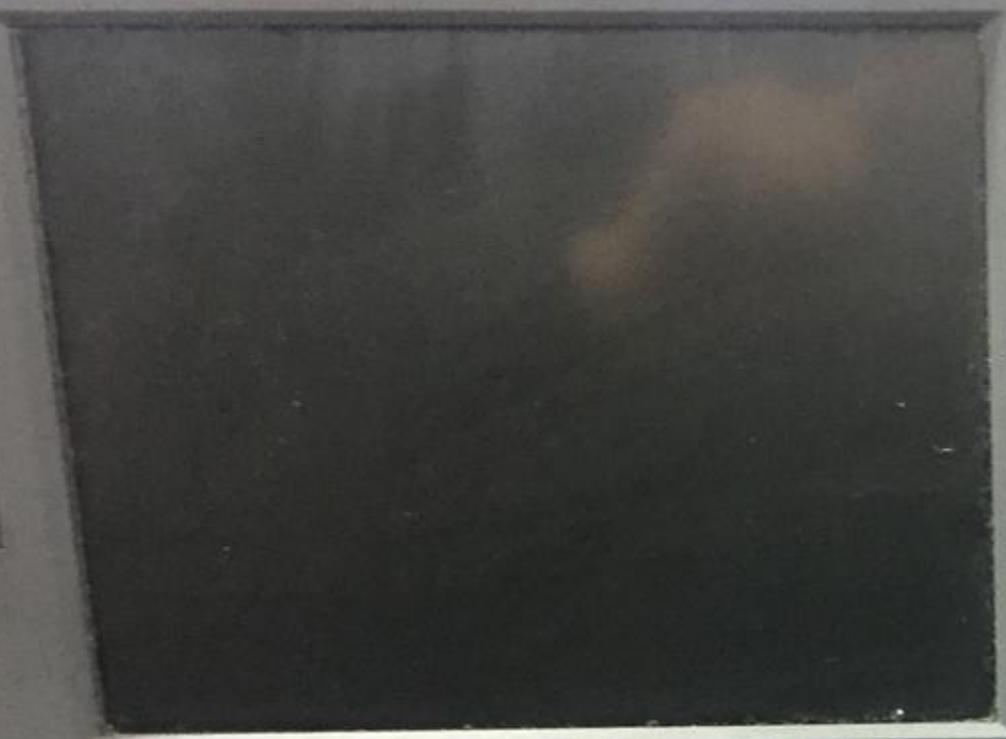

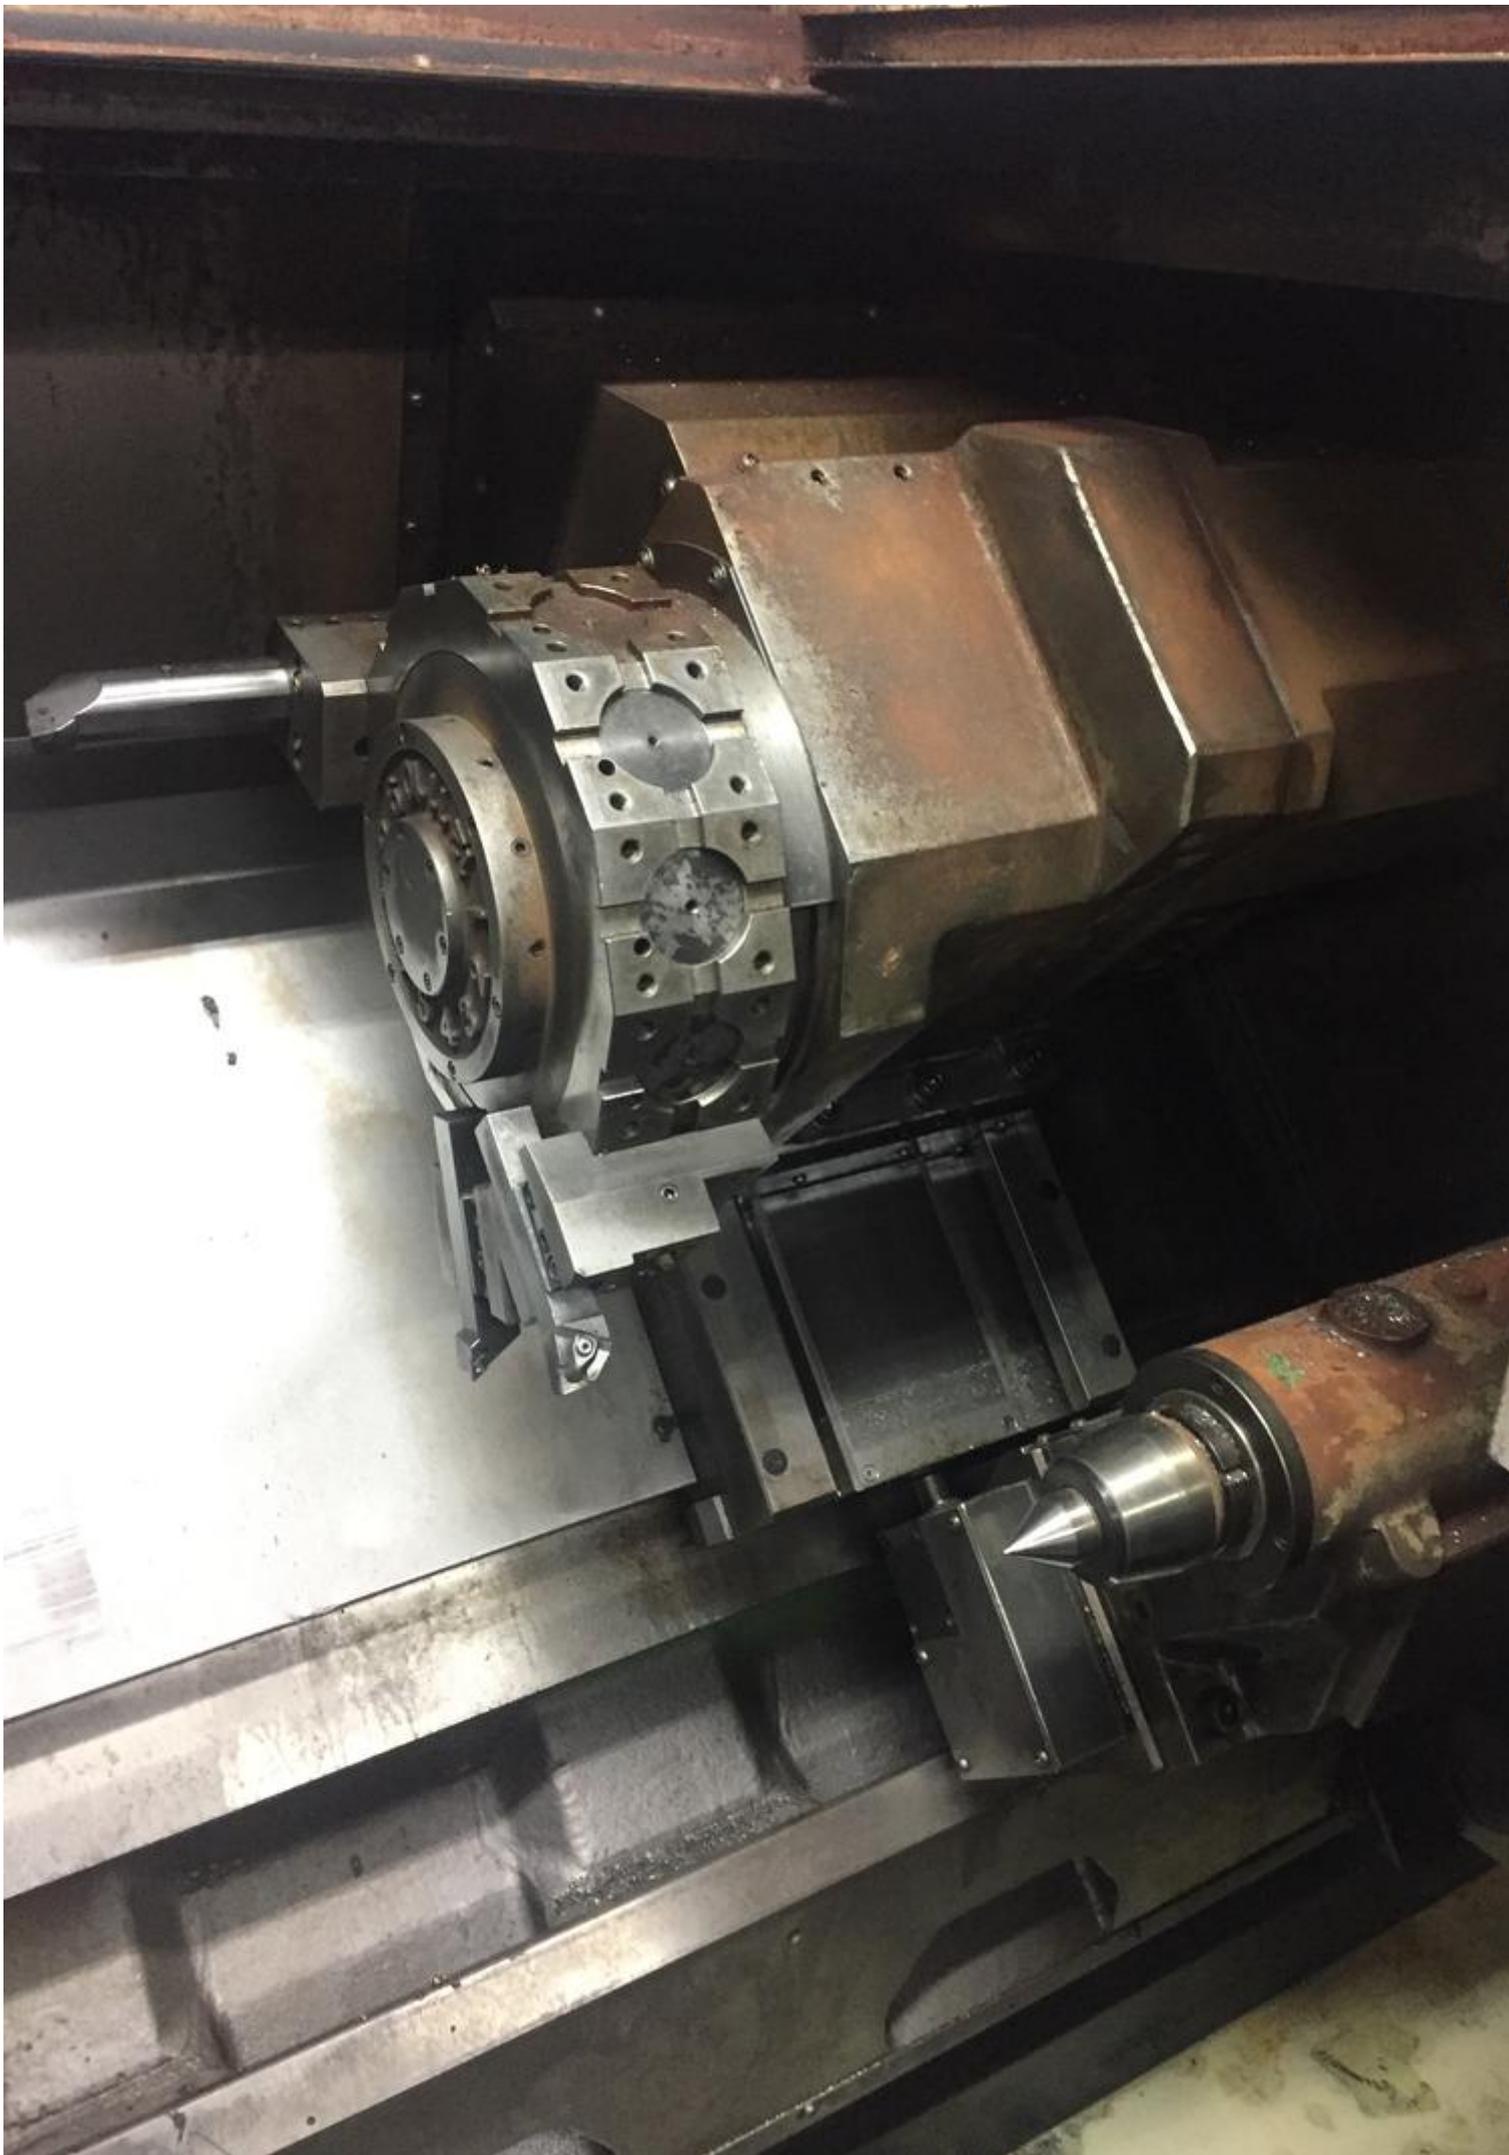





sorgung komplett
Wartung nur
tes Personal

L31685124C / GERMAN



DREHZENTRUM

MODELL : **PUMA 280M**

SERIEN-NR. : **P280M 0893**

NETZANSCHLUSS : AC200/220V, 3 ϕ .PE, 50/60Hz

NENNLEISTUNG : **37.91** kVA

MAX. LAST : **18.5** kW

VOLLASTSTROM : **57.59** A

UNTERBRECHUNGSSTROM : **17** kA

SCHALTPLAN-AUSGABE : **P24MHO ICA05**

GEWICHT : **4900** kg

GEBAUT : **2008 .03.** MADE IN KOREA

Haupt-Überstromschutz an den Maschinen-Netzklemmen.

Doosan Infracore

601-3, Namsan-dong, Changwon, Korea

L31685053D, GERMAN





Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:
851-12221207

Overview and Technical Data:

DOOSAN - Puma 280M CNC Lathe

DOOSAN



Year of Build:
Jan 2008

Description:

Used DOOSAN Puma 280M CNC lathe

CNC Control Fanuc i-Series

Technical specifications:

- Turning diameter 255 mm
- Turning length 1,030 mm
- Circumference diameter over bed 630 mm
- Circumferential diameter over cross slide 460 mm
- Max. Turning diameter 410 mm

Main spindle:

- Speed range - main spindle max. 3,500 min / -1
- Drive power - main spindle 22 / 18,5 kW
- Max. Torque 625 Nm
- Spindle nose ASA A2-8
- Spindle bearing diameter 140 mm
- Spindle bore 86 mm
- Rod diameter 76 mm
- C axis 0.001 °
- Chuck diameter max. 255 mm

Turret:

- Number of tool places 12 pos.
- powered stations 12 pos.
- Speed range - ang. Tools max. 5,000 min -1
- Drive power - angetr. Tools 5.5 kW
- Shank diameter 25 mm
- Drill diameter 40 mm
- Change time 0.15 sec

Travel:

- x-axis 242 mm
- z-axis 1,100 mm

Tailstock:

- Pinole diameter 100 mm
- Quill stroke 100 mm
- Tailstock mount MT 5

Feeds:

- Rapid traverse X: 24 / Z: 30 m / min
- Total power requirement 38.4 kVA
- Space required approx. 5.0

Technical Data:

Technical Data:

Control:

[FANUC](#)

Turning length:

1030.00 mm

Turning diameter:

255.00 mm

Spindle Speed:
3500.00 rpm
Driven Tools:
12.00
Tool Capacity:
12 x
Tailstock:
Yes
Bezel:
No

Dimensions and Weight:

Height:
1735 mm
Length:
3418 mm
Width:
1670 mm
Weight:
4900 kg

Buyer Information:

Condition:
[Very good condition](#)
Available:
[Sold](#)
Sold as:
[EXW \(Ex Works - Incoterm\)](#)
VAT:
[19 %](#)
Buyers Premium:
[16 %](#)
Location:
Germany

Images:





Doosan
Puma 280 M
280

SAFETY
WARNING

DOOSAN

DOOSAN - FANUC i Series

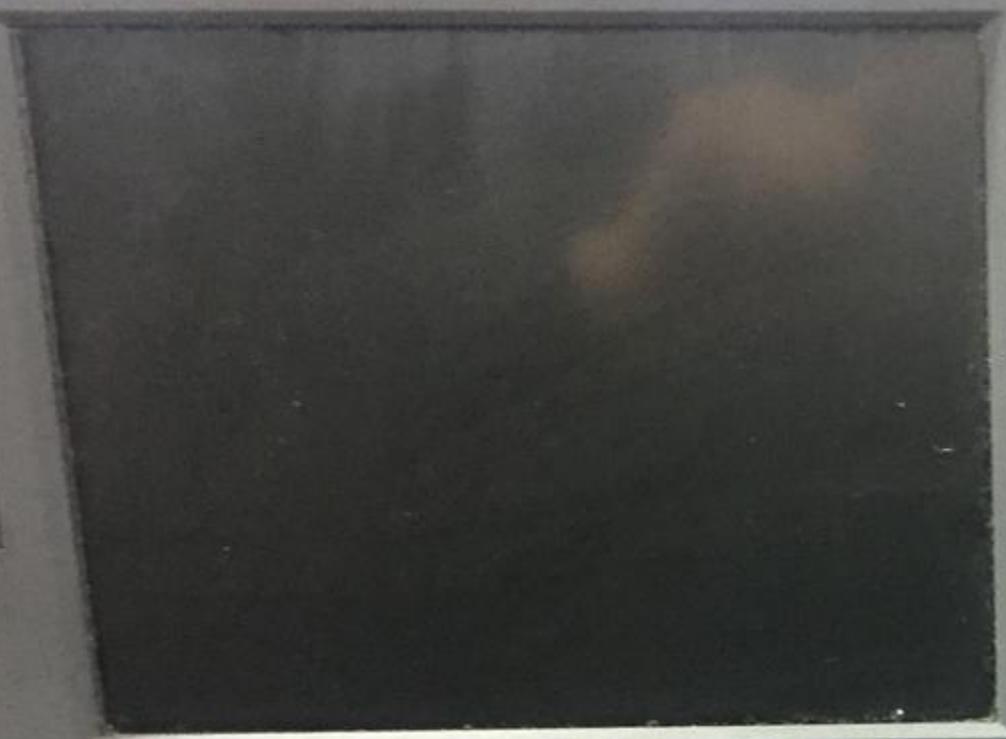

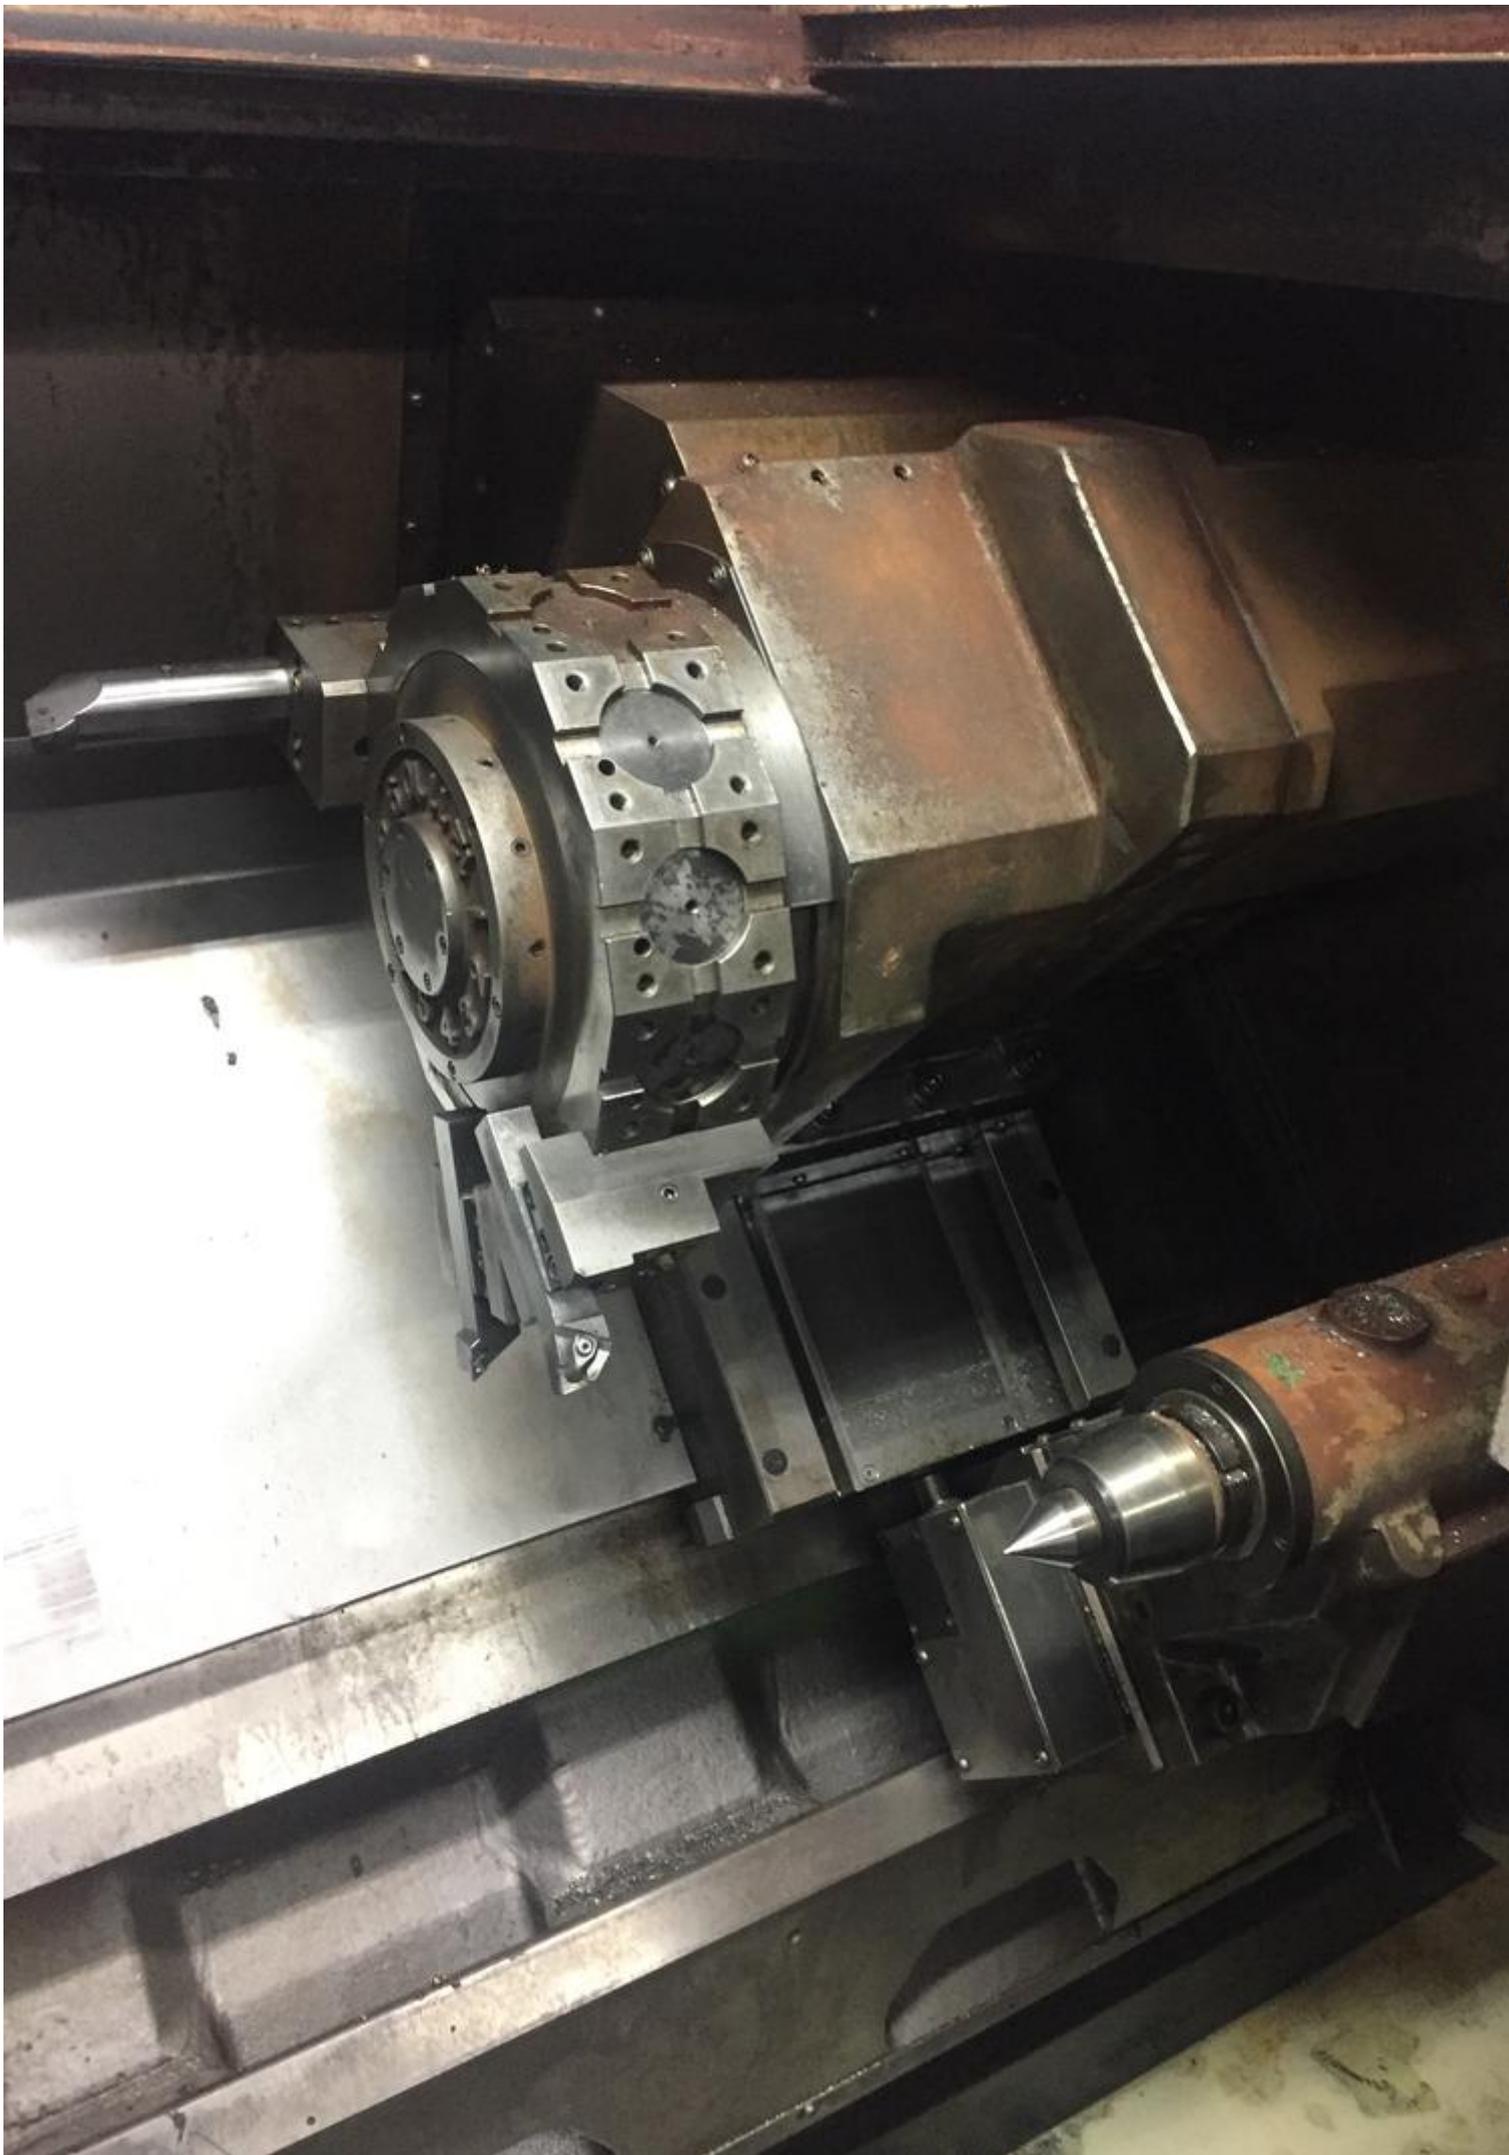





sorgung komplett
Wartung nur
tes Personal

L31685124C / GERMAN



DREHZENTRUM

MODELL : **PUMA 280M**

SERIEN-NR. : **P280M 0893**

NETZANSCHLUSS : AC200/220V, 3 ϕ .PE, 50/60Hz

NENNLEISTUNG : **37.91** kVA

MAX. LAST : **18.5** kW

VOLLASTSTROM : **57.59** A

UNTERBRECHUNGSSTROM : **17** kA

SCHALTPLAN-AUSGABE : **P24MHO ICA05**

GEWICHT : **4900** kg

GEBAUT : **2008 .03.** MADE IN KOREA

Haupt-Überstromschutz an den Maschinen-Netzklemmen.

Doosan Infracore

601-3, Namsan-dong, Changwon, Korea

L31685053D, GERMAN





Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 12.03.2026

© Copyright 2026 - [Asset-Trade](#)

Page