

Image not found or type unknown



Ref. No.:
1109-02252034

Overview and Technical Data:

MIKRON - VCE 600 Pro with Heidenhain TNC 530

MIKRON



Year of Build:
Jan 2006

Description:

Used MIKRON VCE 600 Pro - vertical machining center

Control type CNC control Heidenhain iTNC 530

Approximately 50,000 operating hours

Technical details

- Travels
 - x-way 600 mm
 - y-way 500 mm
 - z-way 540 mm
- Max. Distance between work table and spindle nose 635 mm
- Size 700 x 500 mm
- Max. Table load 800 kg
- Spindle holder ISO 40
- Spindle speeds max. 10,000 rpm
- Drive power - spindle motor 18 kW
- Infinitely variable feed 24/24/20 mm / min
- Rapid traverse 24/24/20 m / min
- Tool changing device 24 pos.
- 400 V operating voltage
- Total power requirement 35 kVA
- Space requirements approx. 2.86 x 2.60 x 2.70 m

Technical Data:

Technical Data:

Control:

[TNC 530](#)

Machine Hours:

50.000 hrs.

Spindle Speed:

10.000 rpm

Tool Capacity:

24 x

Travels:

X-Axis:

600 mm

Y-Axis:

500mm

Z-Axis:

540 mm

Dimensions and Weight:

Height:

2.700 mm

Width:

2.600 mm

Length:

2.860 mm

Weight:

4.800 kg

Buyer Information:

Condition:

[Very good condition](#)

Availability:

[Immediately](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[16 %](#)

Location:

Germany

Images:



MIKRON

VC_E 600 Pro

Kode Personalia Ya

| | |
|----|-----|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |
| 7 | 8 |
| 9 | 10 |
| 11 | 12 |
| 13 | 14 |
| 15 | 16 |
| 17 | 18 |
| 19 | 20 |
| 21 | 22 |
| 23 | 24 |
| 25 | 26 |
| 27 | 28 |
| 29 | 30 |
| 31 | 32 |
| 33 | 34 |
| 35 | 36 |
| 37 | 38 |
| 39 | 40 |
| 41 | 42 |
| 43 | 44 |
| 45 | 46 |
| 47 | 48 |
| 49 | 50 |
| 51 | 52 |
| 53 | 54 |
| 55 | 56 |
| 57 | 58 |
| 59 | 60 |
| 61 | 62 |
| 63 | 64 |
| 65 | 66 |
| 67 | 68 |
| 69 | 70 |
| 71 | 72 |
| 73 | 74 |
| 75 | 76 |
| 77 | 78 |
| 79 | 80 |
| 81 | 82 |
| 83 | 84 |
| 85 | 86 |
| 87 | 88 |
| 89 | 90 |
| 91 | 92 |
| 93 | 94 |
| 95 | 96 |
| 97 | 98 |
| 99 | 100 |

HALDER
CONNECTED PAK CMH

Clipboard with a red string.

VORSICHT
Gefährliche Spannung!
Bei Wartungsarbeiten
den Werkzeuggestrich
entriegeln.



MIKRON



Mikron Agie Charmilles AG
Ipsachstrasse 16
CH-2560 Nidau/Switzerland

VCE600+

Typ/Type

ITNC530

0272

Serial Nr./Serial No./No. serial

VCE_{EXX}Pro-V5

Steuerung/Control/Commande

11.2005

Schema Nr./Schema No./Schéma No.

Gültigkeit/Validity/Validité

3X400VAC+PE-50/60HZ

Spannung, Frequenz/Voltage, Frequency/Tension, Fréquence

32

A

Vorsicherung/Prefuse/
Fusibles externes

24

V DC

Steuerspannung/Control circuit voltage/
Tension circuit de commande

<76

dB(A)

Schallpegel/Sound level/Niveau sonore



4800

kg

Gewicht/Weight/Poids

16

kW

Anschlussleistung/
total installed rated load/
puissance de raccordement

>0.9

cos φ

2006

Baujahr/Model/Modèle



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Ref. No.:

1109-02252034

Overview and Technical Data:

MIKRON - VCE 600 Pro with Heidenhain TNC 530

MIKRON



Year of Build:
Jan 2006

Description:

Used MIKRON VCE 600 Pro - vertical machining center

Control type CNC control Heidenhain iTNC 530

Approximately 50,000 operating hours

Technical details

- Travels
 - x-way 600 mm
 - y-way 500 mm
 - z-way 540 mm
- Max. Distance between work table and spindle nose 635 mm
- Size 700 x 500 mm
- Max. Table load 800 kg
- Spindle holder ISO 40

- Spindle speeds max. 10,000 rpm
- Drive power - spindle motor 18 kW
- Infinitely variable feed 24/24/20 mm / min
- Rapid traverse 24/24/20 m / min
- Tool changing device 24 pos.
- 400 V operating voltage
- Total power requirement 35 kVA
- Space requirements approx.2.86 x 2.60 x 2.70 m

Technical Data:

Technical Data:

Control:

[TNC 530](#)

Machine Hours:

50.000 hrs.

Spindle Speed:

10.000 rpm

Tool Capacity:

24 x

Travels:

X-Axis:

600 mm

Y-Axis:

500mm

Z-Axis:

540 mm

Dimensions and Weight:

Height:

2.700 mm

Width:

2.600 mm

Length:

2.860 mm

Weight:

4.800 kg

Buyer Information:

Condition:

[Very good condition](#)

Availability:

[Immediately](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

19 %


Buyers Premium:

16 %

Location:

Germany

Images:

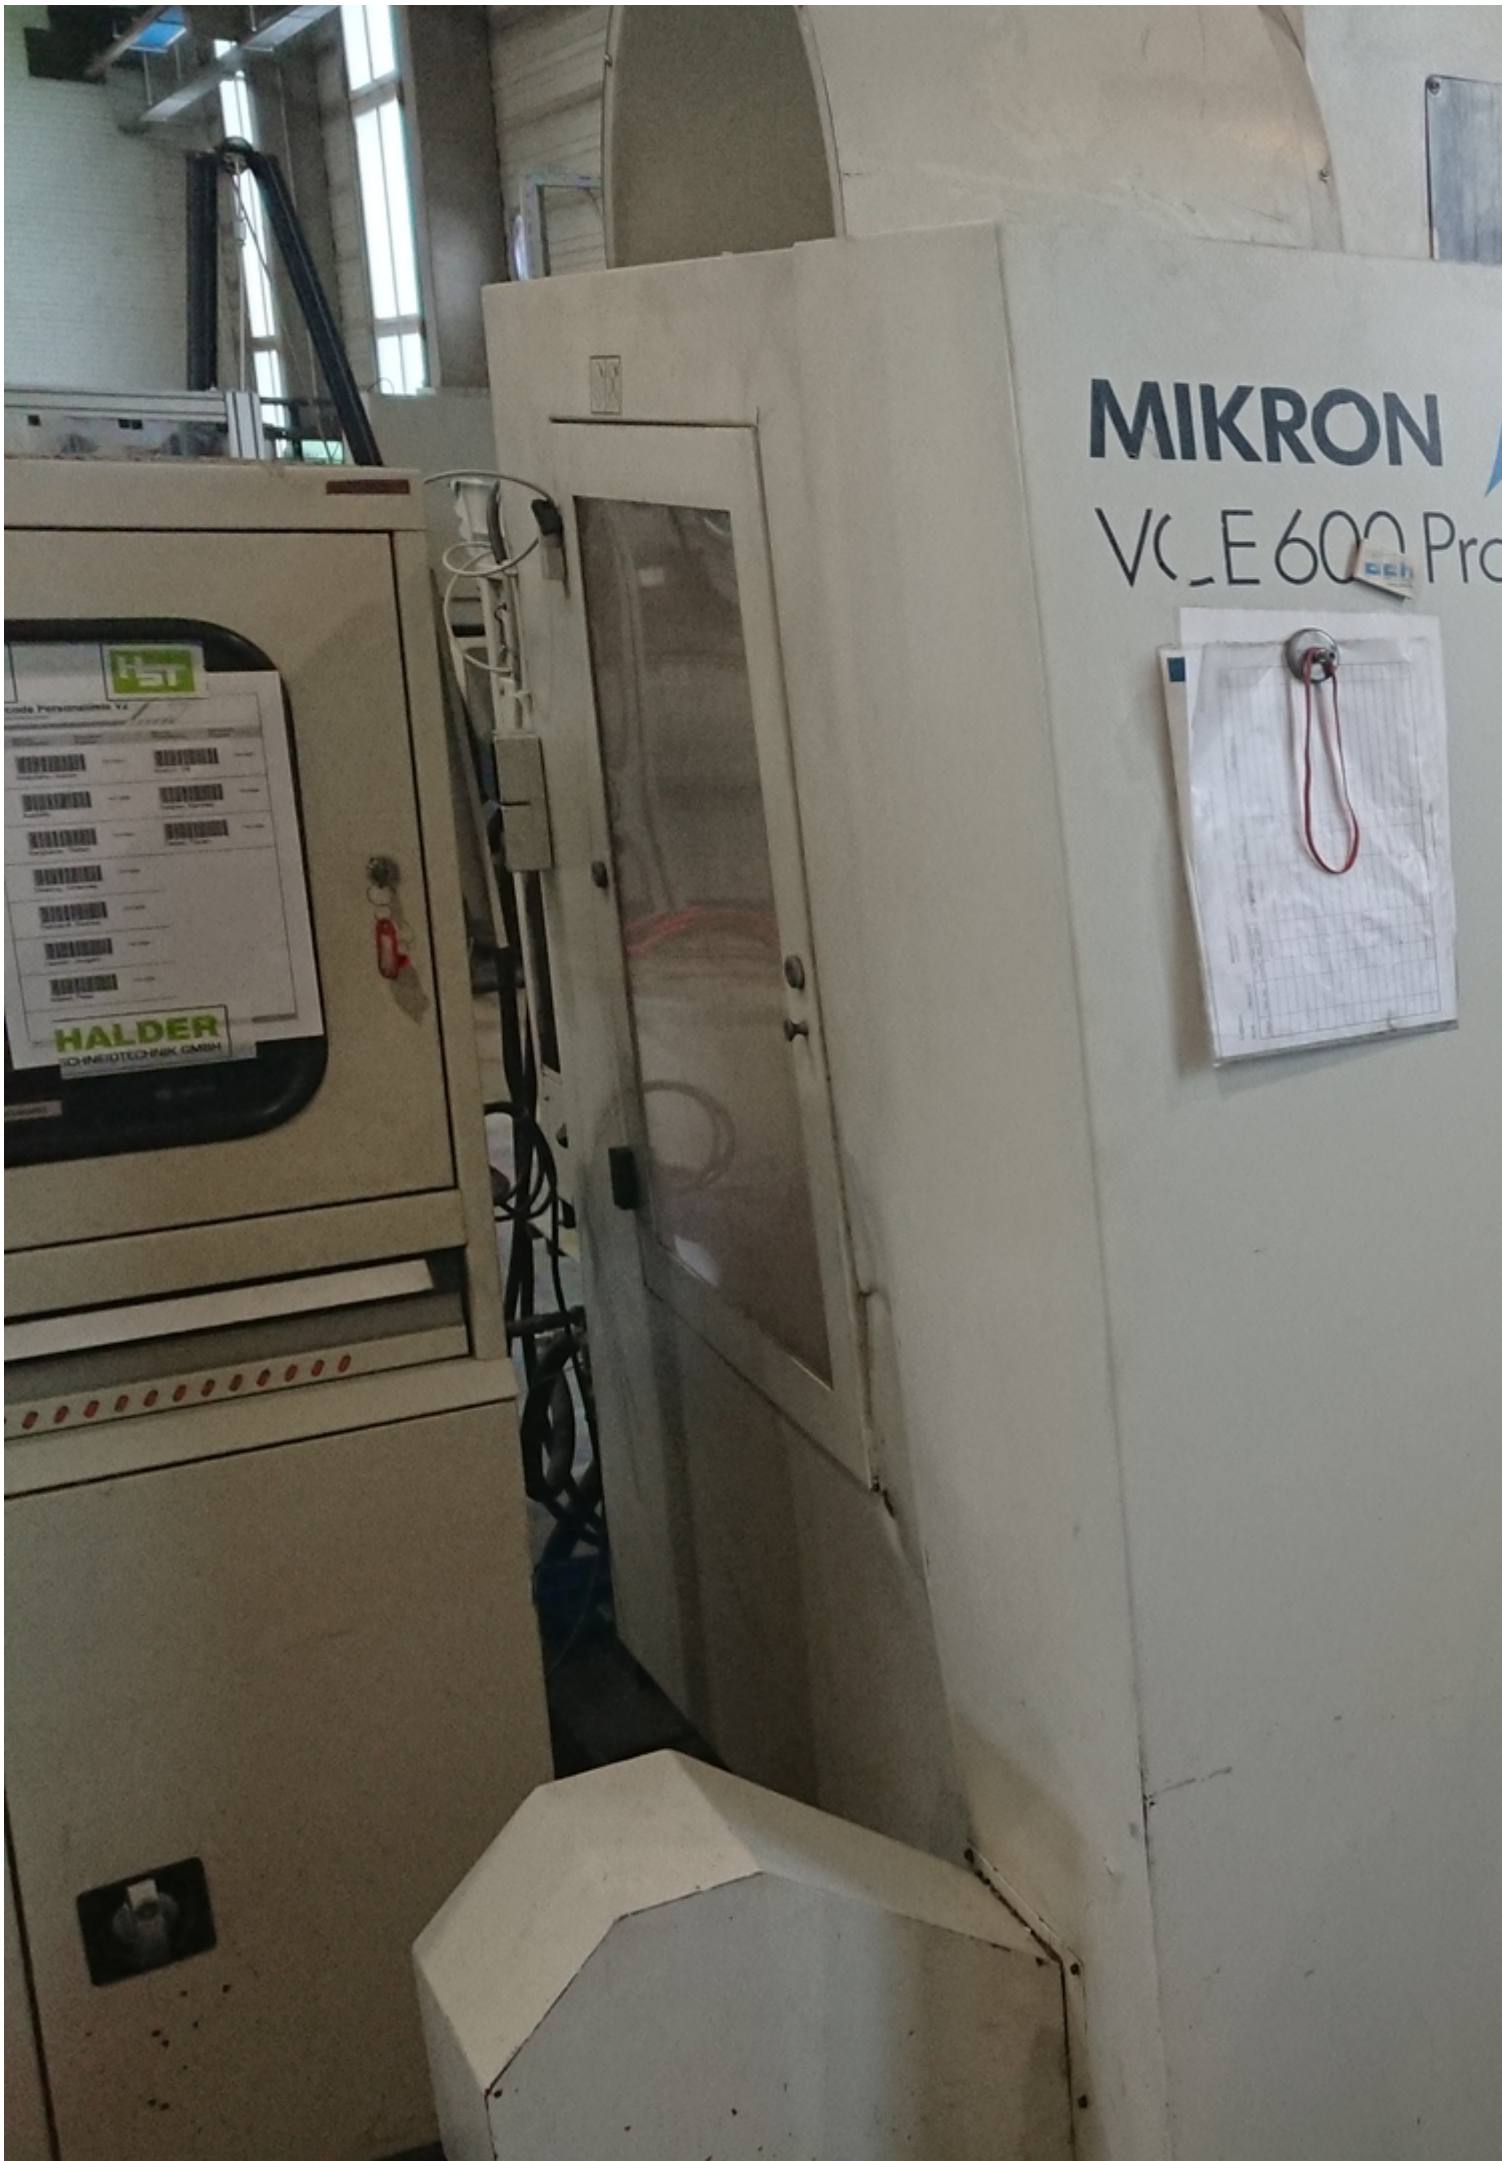

MIKRON

VC_E 600 Pro


Kode Personalia Ya

| | |
|----|----|
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |
| NO | NO |

HALDER
CONNECTED PAK CMH

Clipboard with a red string attached to a metal fastener on the white panel.

VORSICHT
Gefährliche Spannung!
Bei Wartungsarbeiten
den Werkzeuggestrich
entlasten!

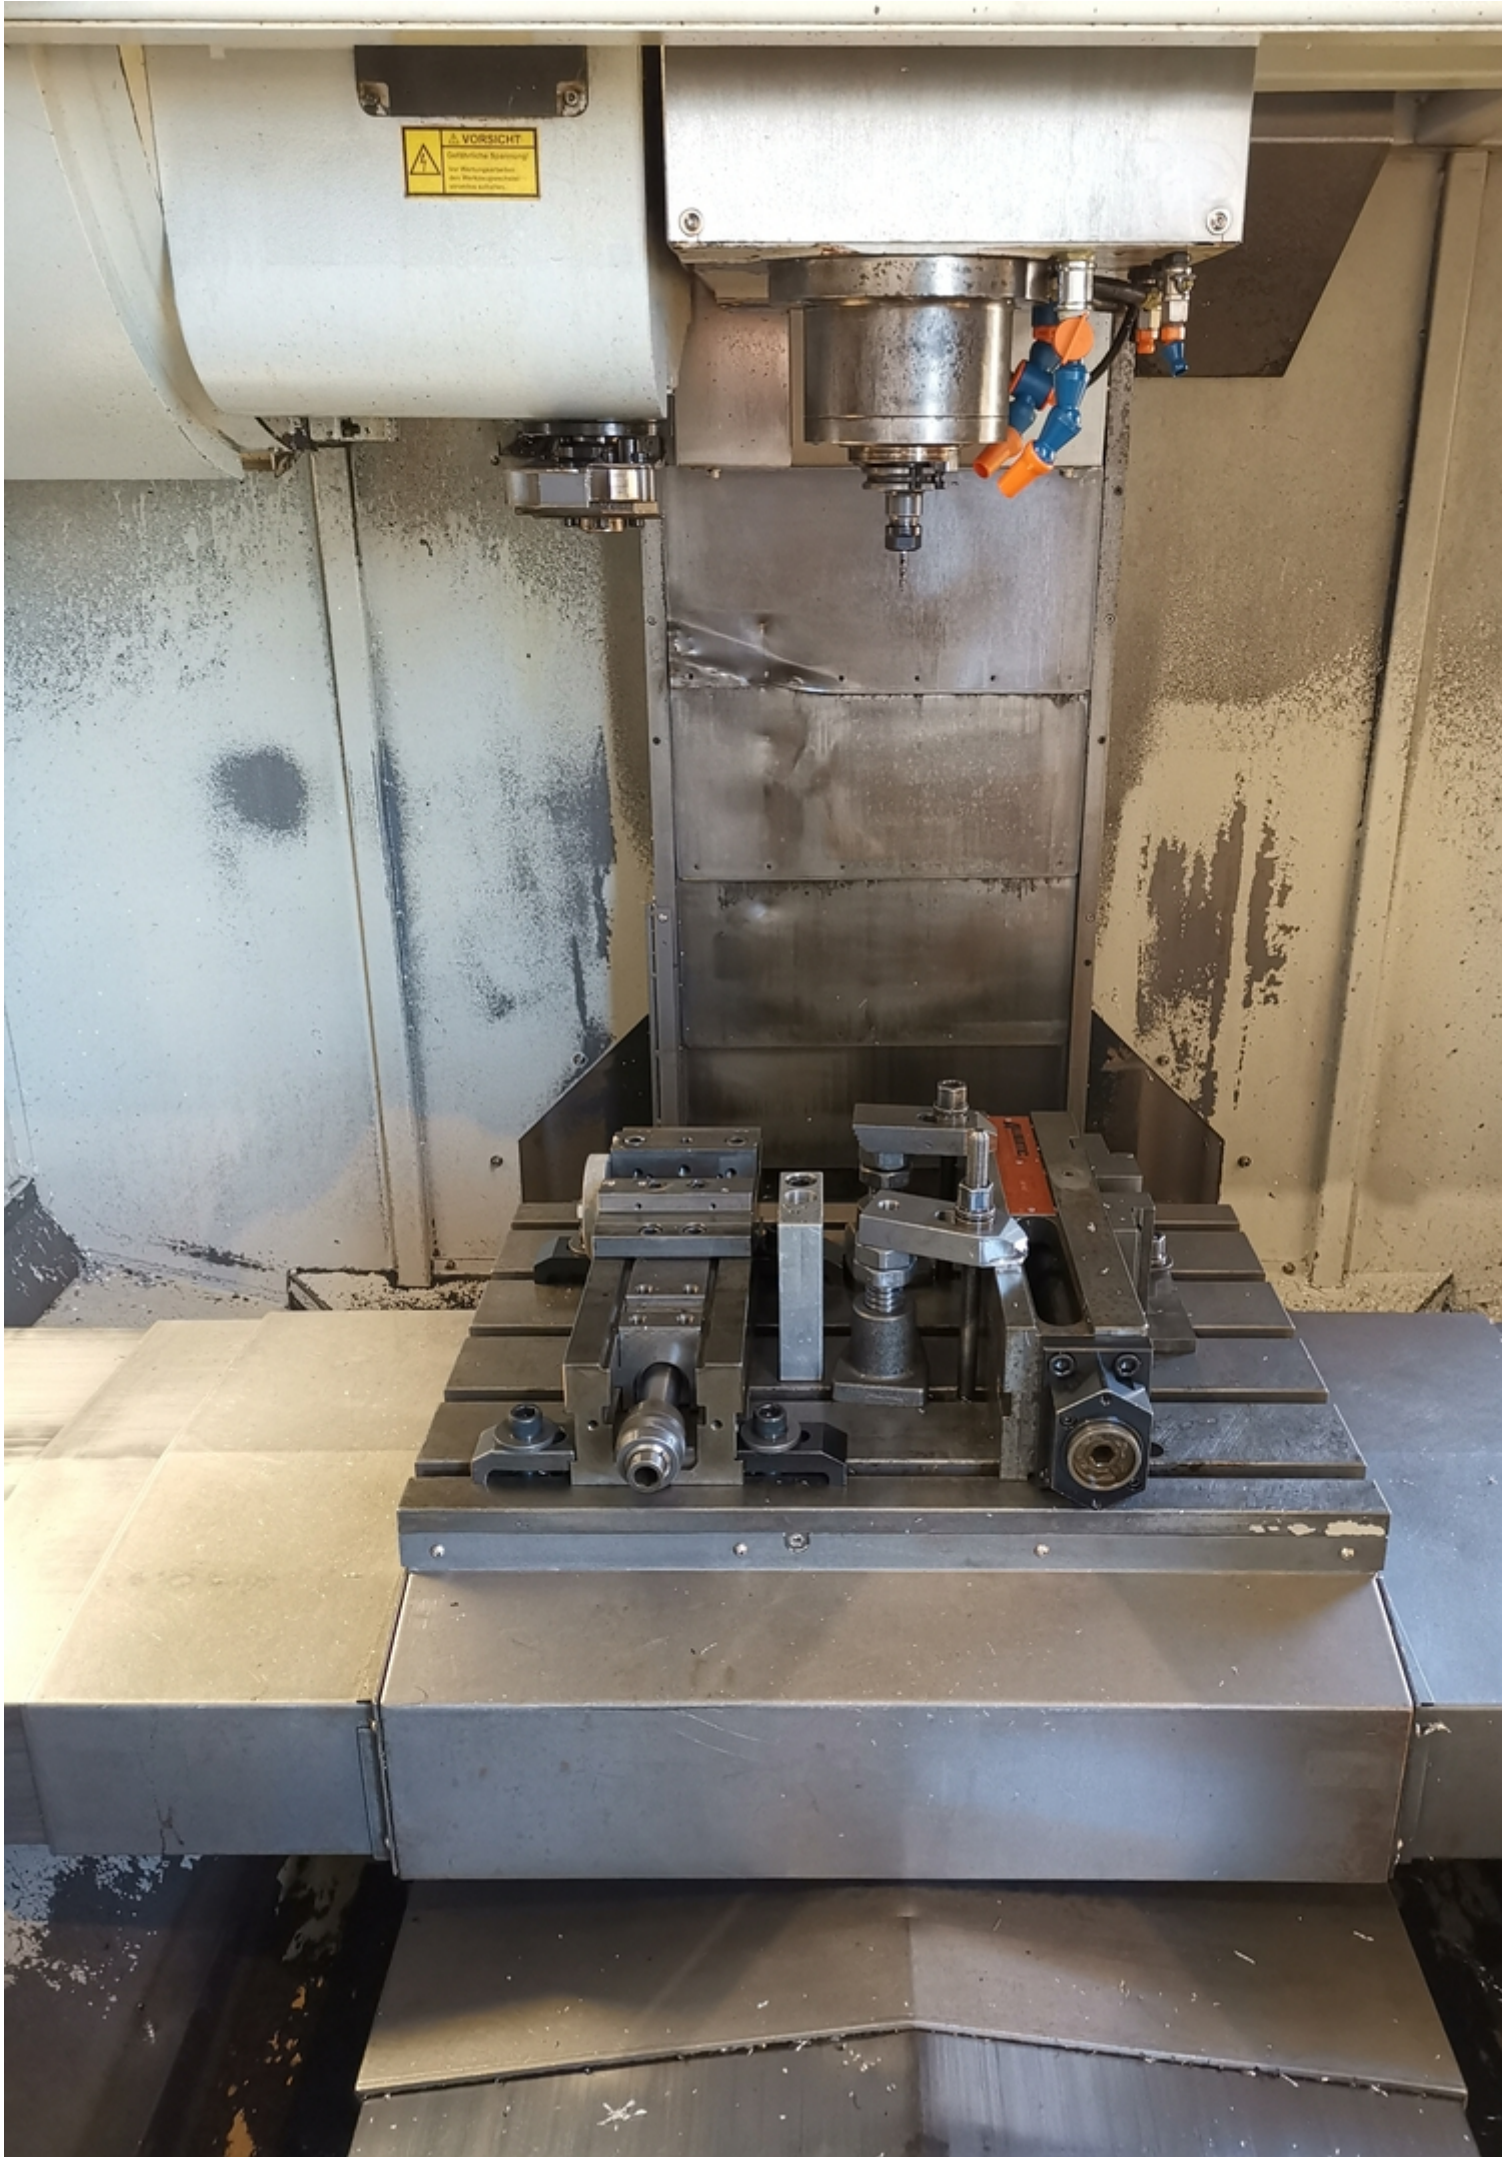

MIKRON



Mikron Agie Charmilles AG
Ipsachstrasse 16
CH-2560 Nidau/Switzerland

VCE600+

Typ/Type

ITNC530

Steuerung/Control/Commande

11.2005

Gültigkeit/Validity/Validité

0272

Serial Nr./Serial No./No. serial

VCE_{EXX}Pro-V5

Schema Nr./Schema No./Schéma No.

3X400VAC+PE-50/60HZ

Spannung, Frequenz/Voltage, Frequency/Tension, Fréquence

32 A

Vorsicherung/Prefuse/
Fusibles externes

24 V DC

Steuerspannung/Control circuit voltage/
Tension circuit de commande

<76 dB(A)

Schallpegel/Sound level/Niveau sonore



4800 kg

Gewicht/Weight/Poids

16 kW

Anschlussleistung/
total installed rated load/
puissance de raccordement

>0.9

cos φ

2006

Baujahr/Model/Modèle



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://www.asset-trade.de/en>

Generated on 15.04.2026

© Copyright 2026 - [Asset-Trade](#)

Page