



Asset-Trade

Assessment & Sale of Used Assets

Ref. Nr.: 1013-03251118

Übersicht und technische Daten:

**MORI SEIKI - NZ-S1500/500 2-Revolver
Wellendrehmaschine**

DMG MORI SEIKI

DMG / MORI SEIKI

Baujahr: Jan. 2008



Beschreibung:

Gebrauchte MORI SEIKI NZ-S1500/500 CNC 2-Revolver Wellendrehmaschine

4 Maschinen verfügbar !!! von Volkswagen

Technische Daten

- Spindelgeschwindigkeit 3500 U / min / 5,5 kW
- Spindeldurchmesser 43 mm
- Revolver 6 Stationen Capto C3
- Revolver-Indizierungszeit 0,18 s
- Bettlänge 530 mm
- Reitstockhub 200 mm
- Reitstockspindel Hub 70 mm
- Verfahrweg X 60 mm, Z 580 mm
- Beschleunigung 0,5 g
- Verfahrgeschwindigkeit 20 m / min

Keine Späneförderer vorhanden



Technische Daten:

Technische Daten:

Steuerung: Series 32i
Drehlänge: 1500.00 mm
Drehdurchmesser: 500.00 mm
Spindeldrehzahl: 3500.00 U/Min
Angetriebene Werkzeuge: 5.00
Werkzeugkapazität: 5 x
Reitstock: Ja
Lünette: Nein

Abmessungen und Gewicht:

Gewicht: 3000 kg

Käuferinformationen:

Zustand: Sehr guten Zustand
Verfügbar: Verkauft
Verkauft als:
EXW (ab Werk - Incoterm)
MwSt.: 19 %
Käuferaufgeld: 16 %
Standort: Deutschland



Asset-Trade

Assessment & Sale of Used Assets

Bilder:






Assets

e


assets




6

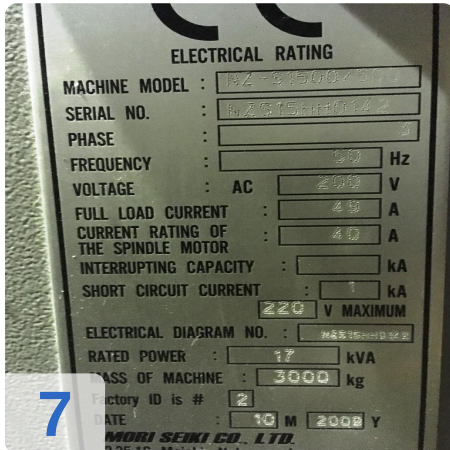


7

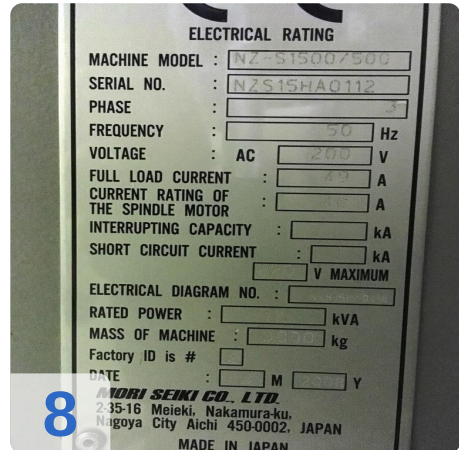


8

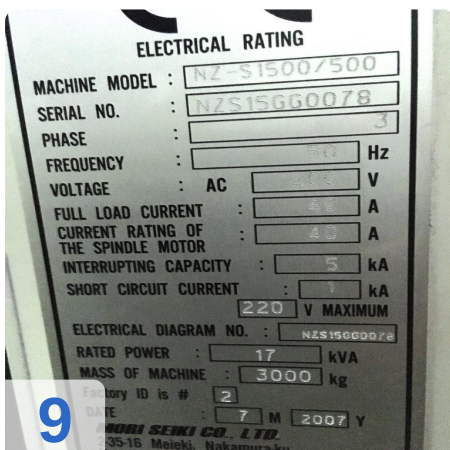


9

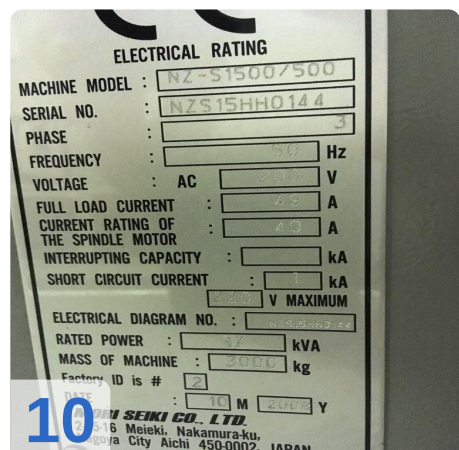

10

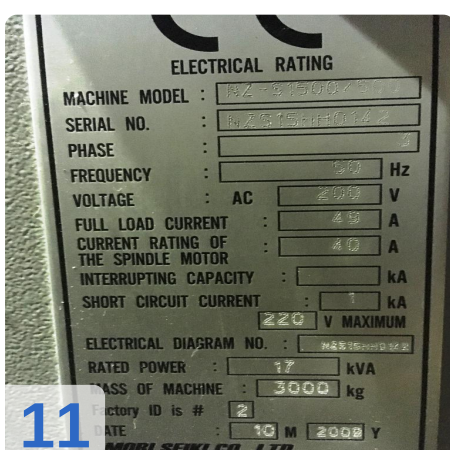

11

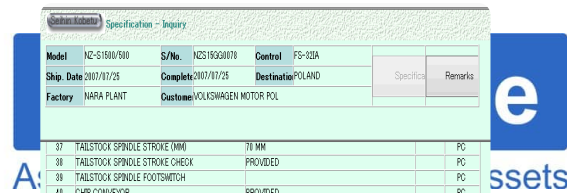

Model	NZ-S1550/530	S/N	NZS1550G078	Control	FS-35A		
Ship Date	2017/07/25	Complete	2017/07/25	Destination	POLAND	Specifics	Remarks
Factory	NARA PLANT	Customer	VOLKSWAGEN MOTOR POL				
71	WORK PULL OUT SYSTEM			TURRET1 & TURRET 2 CATCHING TYPE			PC
74	SPECIFICATION FOR EXHIBITION						PC
75	NUMBER OF TOTAL COUNTERS		1				PC
76	NUMBER OF WORK COUNTERS		1				PC
77	NUMBER OF EXTERNAL IN CODES		5				PC
78	AUTOMATIC POWER SHUTOFF						PC
79	AC100V SERVICE OUTLET ON OPERATION PANEL						PC
80	STEP-DOWN TRANSFORMER			UNNECESSARY			PC
81	STEP-DOWN TRANSFORMER CABLE			PROVIDED			PC
82	LEAK BREAKER						PC
83	CONTROL BOX MANUFACTURE			OUTSIDE SUPPLIER			PC
84	LANGUAGE ON NC SCREEN			GERMAN			PC
85	LANGUAGE ON PC SCREEN			GERMAN			PC
86	LANGUAGE ON WARNING SCREEN			GERMAN			PC
87	PROGRAMMING RESOLUTION MULTIPLIED BY 10						PC
88	VARIABLE LEAD THREAD CUTTING						PC
FEED ST							PC
14	PARALLEL STRAGE (BYTE)			128 KBYTE (20 N)			PC
15	TO STORED PROGRAMS			250			PC
16	REMOTE COMMUNICATION FUNCTION						PC

Model	NC-S1601/300	S/Nr.	NC519340078	Control	FG-1224	Specific	Remarks
Ship. Date	2007/07/25	Complete	2007/07/25	Destination	POLAND		
Factory	NARA PLANT	Customer	VOLKSWAGEN MOTOR POL				
80	PART PROGRAM STRAGE (BYTE)		128 KBYTE (320 M)				PC
91	NUMBER OF STORED PROGRAMS		250				PC
92	REMOTE COMMUNICATION FUNCTION						PC
93	NUMBER OF TOOL OFFSET PAIRS		32				PC
94	FLOATING ZERO RETURN						PC
95	ADDITION OF OPTIONAL BLOCK SKIP						PC
96	HANDLE FEED INTERRUPTION						PC
97	PROGRAM RESTART						PC
98	SEQUENCE NUMBER COLLATION AND STOP						PC
99	INTERRUPTION TYPE CUSTOM MACRO						PC
100	CUSTOM MACRO		PROVIDED				PC
101	PROGRAMMABLE DATA INPUT		PROVIDED				PC
102	NUMBER OF CUSTOM MACRO COMMON VARIABLES		600				PC
103	EXTERNAL HIGH-SPEED SKIP						PC
104	TOOL LIFE MANAGEMENT		B				PC
105	NUMBER OF TOOL LIFE MANAGEMENT (MGPD)		MAX. 64 PAIRS * 10				PC
106	TOOL LIFE MANAGEMENT (CHECK 2.0)						PC
107	TOOL LIFE MANAGEMENT (ALSTOOCK)						PC

[Data](#)
[Bearbeiten](#)
[Ansicht](#)
[Favoriten](#)
[Etras ?](#)

[http://webshop01.moetizeki.com/Machine/M01_C4AR/index.aspx?ID=M00_0200&C4SH=N2-P-2](#)
[Google Maps](#)
[Google Übersetzer](#)
[Moin Schnellanwahl Intra](#)
[Moin Desamlet Login](#)

[Visibility & Collaboration](#)
[Google Maps](#)
[Google Übersetzer](#)
[Moin Schnellanwahl Intra](#)
[Moin Desamlet Login](#)

[Specification - Inquiry](#)

Model	NZ-S160/500	S/No	NZS195360870	Control	FS-120A	Specifics	Remarks
Ship. Date	2007/07/25	Completed	2007/07/25	Destination	POLAND		
Factory	NARA PLANT	Customer	VOLKSWAGEN MOTOR POL				

18	SPLASH GUARD TYPE	STANDARD TYPE	PG
19	SPINDLE (SPINDLE 1) OUTPUT (MM)	HIGH-TORQUE (11-75 KW)	PG
20	SPINDLE (SPINDLE 1) SPEED (MM/1)	8000 MM/1	PG
21	SPINDLE (SPINDLE 1) THROUGH-SPINDLE HOLE DIA (MM)	41 MM DIA	PG
22	SPINDLE (SPINDLE 1) CHUCK TYPE		PG
23	SPINDLE (SPINDLE 1) CHUCK CYLINDER TYPE		PG
24	SPINDLE (SPINDLE 1) ORIENTATION	PROVIDED (WITHOUT LOCK)	PG
25	SPINDLE AIR PURGE	PROVIDED	PG
26	SPINDLE 2		PG
27	TURRET (TURRET 1) TYPE OF TURRET	6 STATIONS	PG
28	TURRET (TURRET 1) MILLING FUNCTION		PG
29	TURRET (TURRET 1) TOOL MOUNTING METHOD	CAPTO C3	PG
30	TYPE OF TURRET 2	6 STATIONS	PG
31	TURRET 2 MILLING FUNCTION		PG
32	TURRET 2 TOOL MOUNTING METHOD	CAPTO C3	PG
33	TURRET 2 MILLING FUNCTION	PROVIDED	PG
34	TURRET 2 MILLING FUNCTION	MANUAL TYPE	PG
35	TURRET 2 MILLING FUNCTION	200 MM	PG
36	TURRET 2 MILLING FUNCTION	BUILT-IN CENTER MT3	PG



Asset-Trade

Assessment & Sale of Used Assets



Asset-Trade

Assessment & Sale of Used Assets

QR Code for <https://www.asset-trade.de/print/pdf/node/6247>

Asset-Trade

**Bewertung & Vermarktung von
Industrieanlagen weltweit**

Am Sonnenhof 16

47800 Krefeld

Deutschland

Tel.: +49 2151 32500 33